

Title: Draft repertoire for DAM1 of ISO/IEC 10646:2012 (3rd edition)**Date: 2012-02-15****L2/11-xxx WG2/N4244**

Source: Michel Suignard, project editor

Status: Project Editor's summary of the character repertoire as result of changes in M59

Action: For review by WG2 and UTC experts

Distribution: WG2 and UTC

Status

This document presents a summary of all characters that constitute the tentative repertoire of the amendment 1 to ISO/IEC 10646:2012, with code positions, representative glyphs and character names. In this document, the names and code positions are shown as currently approved by WG2 for the text of the forthcoming ballot. The purpose of this document is to allow WG2 delegates to review the character names, code positions and glyphs and notify the editor if they differ from what was approved in the meeting. A separate ballot document will be submitted by the project editor after the meeting.

Manner of Presentation

The character names and code points shown are the same for Unicode and ISO/IEC 10646, including annotations.

Note to Reviewers

Please review that this document accurately reflects the decisions taken at meeting M59, and if possible, alert the project and contributing editors to any discrepancies before the ballot is issued.

Despite best efforts there may be minor discrepancies in this document, particularly in terms of this summary and the status information printed in the margins.

Contents

This document lists 1768 characters.

The following list shows all 45 blocks (existing or new) to which characters are proposed to be added, or which have been affected by other changes documented here.

0370-03FF Greek and Coptic

See document L2/10-474 N3840

0530-058F Armenian

See document N3923 N3924 L2/10-354

0600-06FF Arabic

See document L2/10-206 N3843

08A0-08FF Arabic Extended-A

See document L2/10-442R N3882 N4072

0900-097F Devanagari

See document L2/10-475 N3970

0C00-0C7F Telugu

See document L2/10-392R

0C80-0CFF Kannada

See document L2/10-392R

0D00-0D7F Malayalam

See document L2/10-392R

0D80-0DFF Sinhala

See document L2/10-301 N3876 N3888

1900-194F Limbu

See document L2/11-008 N3975

1AB0-1AFF Combining Diacritical Marks Extended

See document N4016

1DC0-1AFF Combining Diacritical Marks Supplement

See document N4016

2300-23FF Miscellaneous Technical

See document N4115

2700-27BF Dingbats

See document N4115

2B00-2BFF Miscellaneous Symbols and Arrows

See document L2/11-196 N4022

2E00-2E7F Supplement Punctuation

See document N3917 L2/10-361 N3893

A640-A69F Cyrillic Extended-B

See document L2/10-394R N3974

A720-A7FF Latin Extended-D

See document L2/11-135 N4016

A9E0-A9FF Myanmar Extended-B

See document L2/10-345 N3906

AB30-ABBF Latin Extended-E

See document N4016

FE20-FE2F Combining Half Marks

See document N4114

102E0-102FF Coptic Epact Numbers

See document L2/10-206 N3843

10300-1032F Old Italic

See document L2/11-146

10500-1052F Elbasan

See document L2/11-050 N3985

10600-107FF Linear A

See document L2/10-422 N3973

10860-1087F Palmyrene

See document L2/10-255 N3867

10880-108AF Nabataean

See document L2/10-473 N3969

10A80-10A9F Old North Arabian

See document L2/10-074R L2/10-376 N3773 N3937

10AC0-10AFF Manichaean

See document L2/11-123R N4029R

111E0-111FF Sinhala Archaic Numbers

See document L2/10-301 N3876 N3888

11200-1124F Khojki

See document L2/11-021 N3978

112B0-112FF Khudawadi

See document L2/10-271 N3871

11480-114DF Tirhuta

See document L2/11-175 N4035

11AC0-11AFF Pau Cin Hau

See document N4017, L2/11-104

16A40-16A6F Mro

See document N3589, L2/09-097R

16AD0-16AFF Bassa Vah

See document N3839 N3847 N3941, L2/10-170 L2/10-217 L2/10-387

1B000-1B0FF Kana Supplement

See document L2/10-468 N3987 N4087

1BC00-1BC9F Duployan

See document L2/10-272R N3895

1BCA0-1BCAF Shorthand Format Controls

See document L2/10-272R N3895

1F100-1F1FF Enclosed Alphanumeric Supplement

See document L2/11-052

1F300-1F5FF Miscellaneous Symbols and Pictographs

See document: N3923 N3924 L2/10-395 L2/11-031

1F600-1F64F Emoticons

See document: L2/11-037 N3982

1F650-1F67F Ornamental Dingbats

See document: L2/11-196 N4022

1F680-1F6FF Transport and Map Symbols

See document: L2/11-196 N4022

1F780-1F7FF Geometric Shapes Extended

See document: L2/11-196 N4022

1F800-1F8FF Supplemental Arrows-C

See document: L2/11-196 N4022

| | 037 | 038 | 039 | 03A | 03B | 03C | 03D | 03E | 03F |
|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 0 | Ɔ 0370 | | í 0390 | Π 03A0 | ü 03B0 | π 03C0 | ϐ 03D0 | ϑ 03E0 | κ 03F0 |
| 1 | ƭ 0371 | | Α 0391 | Ρ 03A1 | α 03B1 | ρ 03C1 | ϑ 03D1 | ϑ 03E1 | ϙ 03F1 |
| 2 | Ƨ 0372 | | Β 0392 | | β 03B2 | ς 03C2 | Υ 03D2 | Ω 03E2 | Ϙ 03F2 |
| 3 | Ƨ 0373 | | Γ 0393 | Σ 03A3 | γ 03B3 | σ 03C3 | Υ 03D3 | ω 03E3 | ϙ 03F3 |
| 4 | ' 0374 | ' 0384 | Δ 0394 | Τ 03A4 | δ 03B4 | τ 03C4 | ÿ 03D4 | ϕ 03E4 | Θ 03F4 |
| 5 | ' 0375 | ' 0385 | Ε 0395 | Υ 03A5 | ε 03B5 | υ 03C5 | ϕ 03D5 | ϕ 03E5 | € 03F5 |
| 6 | И 0376 | À 0386 | Ζ 0396 | Φ 03A6 | ζ 03B6 | φ 03C6 | ϖ 03D6 | ϑ 03E6 | ϑ 03F6 |
| 7 | и 0377 | · 0387 | Η 0397 | Χ 03A7 | η 03B7 | χ 03C7 | ϑ 03D7 | ϑ 03E7 | Ɔ 03F7 |
| 8 | | Έ 0388 | Θ 0398 | Ψ 03A8 | θ 03B8 | ψ 03C8 | ϙ 03D8 | ϑ 03E8 | ϑ 03F8 |
| 9 | | Ή 0389 | Ι 0399 | Ω 03A9 | ι 03B9 | ω 03C9 | ϙ 03D9 | ϑ 03E9 | Ϙ 03F9 |
| A | ' 037A | Ί 038A | Κ 039A | Ϊ 03AA | κ 03BA | ϊ 03CA | ϙ 03DA | ϑ 03EA | Μ 03FA |
| B | Ϙ 037B | | Λ 039B | ÿ 03AB | λ 03BB | ü 03CB | ς 03DB | ϑ 03EB | ϑ 03FB |
| C | ϙ 037C | Ό 038C | Μ 039C | ά 03AC | μ 03BC | ό 03CC | Ɔ 03DC | ϐ 03EC | ρ 03FC |
| D | ϑ 037D | | Ν 039D | έ 03AD | ν 03BD | ύ 03CD | Ɔ 03DD | σ 03ED | Ϙ 03FD |
| E | ; | Ύ 038E | Ξ 039E | ή 03AE | ξ 03BE | ώ 03CE | ϑ 03DE | † 03EE | ϙ 03FE |
| F | J 037F | Ό 038F | Ο 039F | ί 03AF | ο 03BF | ϙ 03CF | ϑ 03DF | † 03EF | ϑ 03FF |

Archaic letters

- 0370 **Η** GREEK CAPITAL LETTER HETA
→ 2C75 **H** latin capital letter half h
- 0371 **η** GREEK SMALL LETTER HETA
→ 2C76 **h** latin small letter half h
- 0372 **Ϻ** GREEK CAPITAL LETTER ARCHAIC SAMPI
- 0373 **ϻ** GREEK SMALL LETTER ARCHAIC SAMPI

Numeral signs

- 0374 **Ϟ** GREEK NUMERAL SIGN
= dexia keraia
• indicates numeric use of letters
→ 02CA **´** modifier letter acute accent
≡ 02B9 **´** modifier letter prime
- 0375 **ϟ** GREEK LOWER NUMERAL SIGN
= aristeri keraia
• indicates numeric use of letters
→ 02CF **´** modifier letter low acute accent

Archaic letters

- 0376 **Ϸ** GREEK CAPITAL LETTER PAMPHYLIAN DIGAMMA
- 0377 **ϸ** GREEK SMALL LETTER PAMPHYLIAN DIGAMMA

Iota subscript

- 037A **Ϲ** GREEK YPOGEGRAMMENI
= iota subscript
→ 0345 **ϱ** combining greek ypogegrammeni
≈ 0020 **ϱ** 0345 **ϱ**

Lowercase of editorial symbols

- 037B **ϻ** GREEK SMALL REVERSED LUNATE SIGMA SYMBOL
- 037C **ϼ** GREEK SMALL DOTTED LUNATE SIGMA SYMBOL
- 037D **Ͻ** GREEK SMALL REVERSED DOTTED LUNATE SIGMA SYMBOL

Punctuation

- 037E **;** GREEK QUESTION MARK
= erotimatiko
• sentence-final punctuation
• 003B **;** is the preferred character
→ 003F **?** question mark
≡ 003B **;** semicolon

Additional letter

- 037F **J** GREEK CAPITAL LETTER YOT
• lowercase is 03F3 **j**

Spacing accent marks

- 0384 **´** GREEK TONOS
→ 00B4 **´** acute accent
→ 030D **◌** combining vertical line above
≈ 0020 **◌** 0301 **◌**
- 0385 **◌** GREEK DIALYTIKA TONOS
≡ 00A8 **◌** 0301 **◌**

Letter

- 0386 **Α** GREEK CAPITAL LETTER ALPHA WITH TONOS
≡ 0391 **Α** 0301 **◌**

Punctuation

- 0387 **·** GREEK ANO TELEIA
• functions in Greek like a semicolon
• 00B7 **·** is the preferred character
≡ 00B7 **·** middle dot

Letters

- 0388 **Ε** GREEK CAPITAL LETTER EPSILON WITH TONOS
≡ 0395 **Ε** 0301 **◌**
- 0389 **Η** GREEK CAPITAL LETTER ETA WITH TONOS
≡ 0397 **Η** 0301 **◌**
- 038A **Ι** GREEK CAPITAL LETTER IOTA WITH TONOS
≡ 0399 **Ι** 0301 **◌**
- 038B **◌** <reserved>
- 038C **Ο** GREEK CAPITAL LETTER OMICRON WITH TONOS
≡ 039F **Ο** 0301 **◌**
- 038D **◌** <reserved>
- 038E **Υ** GREEK CAPITAL LETTER UPSILON WITH TONOS
≡ 03A5 **Υ** 0301 **◌**
- 038F **Ω** GREEK CAPITAL LETTER OMEGA WITH TONOS
≡ 03A9 **Ω** 0301 **◌**
- 0390 **ϊ** GREEK SMALL LETTER IOTA WITH DIALYTIKA AND TONOS
≡ 03CA **ϊ** 0301 **◌**
- 0391 **Α** GREEK CAPITAL LETTER ALPHA
- 0392 **Β** GREEK CAPITAL LETTER BETA
- 0393 **Γ** GREEK CAPITAL LETTER GAMMA
= gamma function
→ 213E **Γ** double-struck capital gamma
- 0394 **Δ** GREEK CAPITAL LETTER DELTA
→ 2206 **Δ** increment
- 0395 **Ε** GREEK CAPITAL LETTER EPSILON
- 0396 **Ζ** GREEK CAPITAL LETTER ZETA
- 0397 **Η** GREEK CAPITAL LETTER ETA
- 0398 **Θ** GREEK CAPITAL LETTER THETA
- 0399 **Ι** GREEK CAPITAL LETTER IOTA
= iota adscript
- 039A **Κ** GREEK CAPITAL LETTER KAPPA
- 039B **Λ** GREEK CAPITAL LETTER LAMDA
- 039C **Μ** GREEK CAPITAL LETTER MU
- 039D **Ν** GREEK CAPITAL LETTER NU
- 039E **Ξ** GREEK CAPITAL LETTER XI
- 039F **Ο** GREEK CAPITAL LETTER OMICRON
- 03A0 **Π** GREEK CAPITAL LETTER PI
→ 213F **Π** double-struck capital pi
→ 220F **Π** n-ary product
- 03A1 **Ρ** GREEK CAPITAL LETTER RHO
- 03A2 **◌** <reserved>
- 03A3 **Σ** GREEK CAPITAL LETTER SIGMA
→ 01A9 **Σ** latin capital letter esh
→ 2211 **Σ** n-ary summation
- 03A4 **Τ** GREEK CAPITAL LETTER TAU
- 03A5 **Υ** GREEK CAPITAL LETTER UPSILON
- 03A6 **Φ** GREEK CAPITAL LETTER PHI
- 03A7 **Χ** GREEK CAPITAL LETTER CHI
- 03A8 **Ψ** GREEK CAPITAL LETTER PSI
- 03A9 **Ω** GREEK CAPITAL LETTER OMEGA
→ 2126 **Ω** ohm sign
→ 2127 **Ω** inverted ohm sign
- 03AA **ϊ** GREEK CAPITAL LETTER IOTA WITH DIALYTIKA
≡ 0399 **Ι** 0308 **◌**
- 03AB **Ϛ** GREEK CAPITAL LETTER UPSILON WITH DIALYTIKA
≡ 03A5 **Υ** 0308 **◌**
- 03AC **ά** GREEK SMALL LETTER ALPHA WITH TONOS
≡ 03B1 **α** 0301 **◌**

| | | |
|------|---|--|
| 03AD | έ | GREEK SMALL LETTER EPSILON WITH TONOS ≡ 03B5 ε 0301 ó |
| 03AE | ή | GREEK SMALL LETTER ETA WITH TONOS ≡ 03B7 η 0301 ó |
| 03AF | ί | GREEK SMALL LETTER IOTA WITH TONOS ≡ 03B9 ι 0301 ó |
| 03B0 | ύ | GREEK SMALL LETTER UPSILON WITH DIALYTIKA AND TONOS ≡ 03CB ü 0301 ó |
| 03B1 | α | GREEK SMALL LETTER ALPHA → 0251 α latin small letter alpha → 221D ∝ proportional to |
| 03B2 | β | GREEK SMALL LETTER BETA → 00DF ß latin small letter sharp s → 0180 b latin small letter b with stroke |
| 03B3 | γ | GREEK SMALL LETTER GAMMA → 0263 γ latin small letter gamma → 213D γ double-struck small gamma |
| 03B4 | δ | GREEK SMALL LETTER DELTA |
| 03B5 | ε | GREEK SMALL LETTER EPSILON → 025B ε latin small letter open e |
| 03B6 | ζ | GREEK SMALL LETTER ZETA |
| 03B7 | η | GREEK SMALL LETTER ETA |
| 03B8 | θ | GREEK SMALL LETTER THETA → 0275 ø latin small letter barred o → 0473 ø cyrillic small letter fita |
| 03B9 | ι | GREEK SMALL LETTER IOTA → 0269 ι latin small letter iota → 2129 ι turned greek small letter iota |
| 03BA | κ | GREEK SMALL LETTER KAPPA |
| 03BB | λ | GREEK SMALL LETTER LAMDA = lambda |
| 03BC | μ | GREEK SMALL LETTER MU → 00B5 μ micro sign |
| 03BD | ν | GREEK SMALL LETTER NU |
| 03BE | ξ | GREEK SMALL LETTER XI |
| 03BF | ο | GREEK SMALL LETTER OMICRON |
| 03C0 | π | GREEK SMALL LETTER PI • math constant 3.141592... |
| 03C1 | ρ | GREEK SMALL LETTER RHO |
| 03C2 | ς | GREEK SMALL LETTER FINAL SIGMA = stigma (the Modern Greek name for this letterform) • not to be confused with the actual stigma letter → 03DB Ϸ greek small letter stigma |
| 03C3 | σ | GREEK SMALL LETTER SIGMA • used symbolically with a numeric value 200 |
| 03C4 | τ | GREEK SMALL LETTER TAU |
| 03C5 | υ | GREEK SMALL LETTER UPSILON → 028A υ latin small letter upsilon → 028B υ latin small letter v with hook |
| 03C6 | φ | GREEK SMALL LETTER PHI → 0278 φ latin small letter phi → 03D5 ϕ greek phi symbol • the ordinary Greek letter, showing considerable glyph variation • in mathematical contexts, the loopy glyph is preferred, to contrast with 03D5 ϕ |
| 03C7 | χ | GREEK SMALL LETTER CHI |
| 03C8 | ψ | GREEK SMALL LETTER PSI |
| 03C9 | ω | GREEK SMALL LETTER OMEGA |

| | | |
|------|---|--|
| 03CA | ϊ | GREEK SMALL LETTER IOTA WITH DIALYTIKA ≡ 03B9 ι 0308 ö |
| 03CB | ϋ | GREEK SMALL LETTER UPSILON WITH DIALYTIKA ≡ 03C5 υ 0308 ö |
| 03CC | ό | GREEK SMALL LETTER OMICRON WITH TONOS ≡ 03BF ο 0301 ó |
| 03CD | ύ | GREEK SMALL LETTER UPSILON WITH TONOS ≡ 03C5 υ 0301 ó |
| 03CE | ώ | GREEK SMALL LETTER OMEGA WITH TONOS ≡ 03C9 ω 0301 ó |

Variant letterforms

| | | |
|------|---|---|
| 03CF | Ϸ | GREEK CAPITAL KAI SYMBOL → 03D7 Ϻ greek kai symbol |
| 03D0 | Ϛ | GREEK BETA SYMBOL = curled beta ≈ 03B2 β greek small letter beta |
| 03D1 | ϛ | GREEK THETA SYMBOL = script theta • used as a technical symbol ≈ 03B8 θ greek small letter theta |
| 03D2 | Ϝ | GREEK UPSILON WITH HOOK SYMBOL ≈ 03A5 Υ greek capital letter upsilon |
| 03D3 | ϝ | GREEK UPSILON WITH ACUTE AND HOOK SYMBOL ≡ 03D2 Ϝ 0301 ó |
| 03D4 | Ϟ | GREEK UPSILON WITH DIAERESIS AND HOOK SYMBOL ≡ 03D2 Ϝ 0308 ö |
| 03D5 | ϕ | GREEK PHI SYMBOL • used as a technical symbol, with a stroked glyph • maps to "phi1" symbol entities ≈ 03C6 ϕ greek small letter phi |
| 03D6 | ϗ | GREEK PI SYMBOL = omega pi • used as a technical symbol • a variant of pi, looking like omega ≈ 03C0 π greek small letter pi |
| 03D7 | Ϻ | GREEK KAI SYMBOL • used as an ampersand → 2CE4 ϻ coptic symbol kai |

Archaic letters

| | | |
|------|---|---|
| 03D8 | Ϟ | GREEK LETTER ARCHAIC KOPPA |
| 03D9 | ϟ | GREEK SMALL LETTER ARCHAIC KOPPA • the Q-shaped archaic koppas are the ordinary alphabetic letters and can also be used as symbols with a numeric value of 90 in classical and pre-classical texts |
| 03DA | Ϡ | GREEK LETTER STIGMA • apparently in origin a cursive form of digamma • the name "stigma" originally applied to a medieval sigma-tau ligature, whose shape was confusably similar to the cursive digamma • used as a symbol with a numeric value of 6 → 2185 Ϡ roman numeral six late form |
| 03DB | ϡ | GREEK SMALL LETTER STIGMA → 03C2 Ϸ greek small letter final sigma |
| 03DC | Ϣ | GREEK LETTER DIGAMMA |
| 03DD | ϣ | GREEK SMALL LETTER DIGAMMA • used as a symbol with a numeric value of 6 |
| 03DE | Ϥ | GREEK LETTER KOPPA |

- 03DF Ͱ GREEK SMALL LETTER KOPPA
• used in modern Greek as a symbol with a numeric value of 90, as in the dating of legal documentation
- 03E0 Ϸ GREEK LETTER SAMPI
- 03E1 ϸ GREEK SMALL LETTER SAMPI
• used as a symbol with a numeric value of 900

Coptic letters derived from Demotic

For other Coptic letters see the Coptic Block.

- 03E2 Ϡ COPTIC CAPITAL LETTER SHEI
- 03E3 ϡ COPTIC SMALL LETTER SHEI
- 03E4 ϣ COPTIC CAPITAL LETTER FEI
- 03E5 ϣ COPTIC SMALL LETTER FEI
- 03E6 Ϥ COPTIC CAPITAL LETTER KHEI
- 03E7 ϥ COPTIC SMALL LETTER KHEI
- 03E8 Ϧ COPTIC CAPITAL LETTER HORI
- 03E9 ϧ COPTIC SMALL LETTER HORI
- 03EA Ϩ COPTIC CAPITAL LETTER GANGIA
- 03EB ϩ COPTIC SMALL LETTER GANGIA
- 03EC Ϫ COPTIC CAPITAL LETTER SHIMA
- 03ED ϫ COPTIC SMALL LETTER SHIMA
- 03EE Ϭ COPTIC CAPITAL LETTER DEI
- 03EF ϭ COPTIC SMALL LETTER DEI

Variant letterforms

- 03F0 ͺ GREEK KAPPA SYMBOL
= script kappa
• used as technical symbol
≈ 03BA κ greek small letter kappa
- 03F1 Ϸ̅ GREEK RHO SYMBOL
= tailed rho
• used as technical symbol
≈ 03C1 ϱ greek small letter rho
- 03F2 ϳ GREEK LUNATE SIGMA SYMBOL
= greek small letter lunate sigma (1.0)
≈ 03C2 ϸ greek small letter final sigma

Additional letter

- 03F3 j GREEK LETTER YOT

Variant letterforms and symbols

- 03F4 Ɽ GREEK CAPITAL THETA SYMBOL
→ 0472 Ɽ cyrillic capital letter fita
≈ 0398 Ɽ greek capital letter theta
- 03F5 ε GREEK LUNATE EPSILON SYMBOL
= straight epsilon
→ 220A ε small element of
≈ 03B5 ε greek small letter epsilon
- 03F6 Ϸ̅ GREEK REVERSED LUNATE EPSILON SYMBOL
= reversed straight epsilon
→ 220D Ϸ̅ small contains as member

Additional archaic letters for Bactrian

- 03F7 Ϸ̅ GREEK CAPITAL LETTER SHO
- 03F8 Ϸ̅ GREEK SMALL LETTER SHO

Variant letterform

- 03F9 ϳ̅ GREEK CAPITAL LUNATE SIGMA SYMBOL
≈ 03A3 ϳ̅ greek capital letter sigma

Archaic letters










- 03FA Ϸ̅ GREEK CAPITAL LETTER SAN
- 03FB Ϸ̅ GREEK SMALL LETTER SAN

Symbol

- 03FC ϱ̅ GREEK RHO WITH STROKE SYMBOL
• used with abbreviations containing 03C1 ϱ

Editorial symbols

- 03FD ϳ̅ GREEK CAPITAL REVERSED LUNATE SIGMA SYMBOL
= antisigma
- 03FE ϳ̅ GREEK CAPITAL DOTTED LUNATE SIGMA SYMBOL
= sigma periestigmenon
- 03FF ϳ̅ GREEK CAPITAL REVERSED DOTTED LUNATE SIGMA SYMBOL
= antisigma periestigmenon

| | 053 | 054 | 055 | 056 | 057 | 058 |
|---|---|-----------|---|---|-----------|--|
| 0 |  | Հ 0540 | Ր 0550 |  | Տ 0570 | Ր 0580 |
| 1 | Ա 0531 | Զ 0541 | Յ 0551 | Մ 0561 | Ճ 0571 | Գ 0581 |
| 2 | Բ 0532 | Ղ 0542 | Ի 0552 | Բ 0562 | Ղ 0572 | Լ 0582 |
| 3 | Գ 0533 | Ճ 0543 | Փ 0553 | Գ 0563 | Ճ 0573 | Փ 0583 |
| 4 | Դ 0534 | Մ 0544 | Ք 0554 | Դ 0564 | Մ 0574 | Ք 0584 |
| 5 | Ե 0535 | Յ 0545 | Օ 0555 | Ե 0565 | Յ 0575 | Օ 0585 |
| 6 | Զ 0536 | Ն 0546 | Ծ 0556 | Զ 0566 | Ն 0576 | Ծ 0586 |
| 7 | Է 0537 | Շ 0547 |  | Է 0567 | Չ 0577 | Լ 0587 |
| 8 | Ը 0538 | Ո 0548 |  | Ը 0568 | Ո 0578 |  |
| 9 | Թ 0539 | Չ 0549 | Ս 0559 | Թ 0569 | Չ 0579 | Ս 0589 |
| A | Ժ 053A | Պ 054A | Վ 055A | Ժ 056A | Պ 057A | Վ 058A |
| B | Ի 053B | Ջ 054B | Վ 055B | Ի 056B | Ջ 057B |  |
| C | Լ 053C | Դ 054C | Ս 055C | Լ 056C | Դ 057C |  |
| D | Խ 053D | Ս 054D | Վ 055D | Խ 056D | Ս 057D |  058D |
| E | Ծ 053E | Վ 054E | Ս 055E | Ծ 056E | Վ 057E |  058E |
| F | Կ 053F | Տ 054F | Վ 055F | Կ 056F | Տ 057F | Վ 058F |

Uppercase letters

| | | |
|------|---|------------------------------|
| 0531 | Ա | ARMENIAN CAPITAL LETTER AYB |
| 0532 | Բ | ARMENIAN CAPITAL LETTER BEN |
| 0533 | Գ | ARMENIAN CAPITAL LETTER GIM |
| 0534 | Դ | ARMENIAN CAPITAL LETTER DA |
| 0535 | Ե | ARMENIAN CAPITAL LETTER ECH |
| 0536 | Զ | ARMENIAN CAPITAL LETTER ZA |
| 0537 | Է | ARMENIAN CAPITAL LETTER EH |
| 0538 | Ը | ARMENIAN CAPITAL LETTER ET |
| 0539 | Թ | ARMENIAN CAPITAL LETTER TO |
| 053A | Ճ | ARMENIAN CAPITAL LETTER ZHE |
| 053B | Ի | ARMENIAN CAPITAL LETTER INI |
| 053C | Լ | ARMENIAN CAPITAL LETTER LIWN |
| 053D | Խ | ARMENIAN CAPITAL LETTER XEH |
| 053E | Վ | ARMENIAN CAPITAL LETTER CA |
| 053F | Կ | ARMENIAN CAPITAL LETTER KEN |
| 0540 | Հ | ARMENIAN CAPITAL LETTER HO |
| 0541 | Ջ | ARMENIAN CAPITAL LETTER JA |
| 0542 | Ղ | ARMENIAN CAPITAL LETTER GHAD |
| 0543 | Ճ | ARMENIAN CAPITAL LETTER CHEH |
| 0544 | Մ | ARMENIAN CAPITAL LETTER MEN |
| 0545 | Ի | ARMENIAN CAPITAL LETTER YI |
| 0546 | Ն | ARMENIAN CAPITAL LETTER NOW |
| 0547 | Շ | ARMENIAN CAPITAL LETTER SHA |
| 0548 | Ո | ARMENIAN CAPITAL LETTER VO |
| 0549 | Չ | ARMENIAN CAPITAL LETTER CHA |
| 054A | Պ | ARMENIAN CAPITAL LETTER PEH |
| 054B | Ջ | ARMENIAN CAPITAL LETTER JHEH |
| 054C | Ռ | ARMENIAN CAPITAL LETTER RA |
| 054D | Ս | ARMENIAN CAPITAL LETTER SEH |
| 054E | Վ | ARMENIAN CAPITAL LETTER VEV |
| 054F | Տ | ARMENIAN CAPITAL LETTER TIWN |
| 0550 | Ր | ARMENIAN CAPITAL LETTER REH |
| 0551 | Թ | ARMENIAN CAPITAL LETTER CO |
| 0552 | Ի | ARMENIAN CAPITAL LETTER YIWN |
| 0553 | Փ | ARMENIAN CAPITAL LETTER PIWR |
| 0554 | Ք | ARMENIAN CAPITAL LETTER KEH |
| 0555 | Օ | ARMENIAN CAPITAL LETTER OH |
| 0556 | Ֆ | ARMENIAN CAPITAL LETTER FEH |

Modifier letters

| | | |
|------|----------------|---|
| 0559 | ◌ [◌] | ARMENIAN MODIFIER LETTER LEFT HALF RING → 02BD ◌ [◌] modifier letter reversed comma → 02BF ◌ [◌] modifier letter left half ring → 0314 ◌ [◌] combining reversed comma above |
| 055A | ◌ [◌] | ARMENIAN APOSTROPHE = armenian modifier letter right half ring (1.0) → 02BC ◌ [◌] modifier letter apostrophe → 02BE ◌ [◌] modifier letter right half ring → 0313 ◌ [◌] combining comma above |
| 055B | ◌ [◌] | ARMENIAN EMPHASIS MARK = shesht → 02CA ◌ [◌] modifier letter acute accent |
| 055C | ~ | ARMENIAN EXCLAMATION MARK = batsaganchakan nshan |
| 055D | ◌ [◌] | ARMENIAN COMMA = bowt → 02CB ◌ [◌] modifier letter grave accent |
| 055E | ◌ [◌] | ARMENIAN QUESTION MARK = hartsakan nshan |
| 055F | ◌ [◌] | ARMENIAN ABBREVIATION MARK = patiw |

Lowercase letters

| | | |
|------|---|---|
| 0561 | ա | ARMENIAN SMALL LETTER AYB |
| 0562 | բ | ARMENIAN SMALL LETTER BEN |
| 0563 | գ | ARMENIAN SMALL LETTER GIM |
| 0564 | դ | ARMENIAN SMALL LETTER DA |
| 0565 | ե | ARMENIAN SMALL LETTER ECH |
| 0566 | զ | ARMENIAN SMALL LETTER ZA |
| 0567 | է | ARMENIAN SMALL LETTER EH |
| 0568 | ը | ARMENIAN SMALL LETTER ET |
| 0569 | թ | ARMENIAN SMALL LETTER TO |
| 056A | ճ | ARMENIAN SMALL LETTER ZHE |
| 056B | ի | ARMENIAN SMALL LETTER INI |
| 056C | լ | ARMENIAN SMALL LETTER LIWN |
| 056D | խ | ARMENIAN SMALL LETTER XEH |
| 056E | վ | ARMENIAN SMALL LETTER CA |
| 056F | կ | ARMENIAN SMALL LETTER KEN |
| 0570 | հ | ARMENIAN SMALL LETTER HO |
| 0571 | ձ | ARMENIAN SMALL LETTER JA |
| 0572 | ղ | ARMENIAN SMALL LETTER GHAD |
| 0573 | ճ | ARMENIAN SMALL LETTER CHEH |
| 0574 | մ | ARMENIAN SMALL LETTER MEN |
| 0575 | յ | ARMENIAN SMALL LETTER YI |
| 0576 | ն | ARMENIAN SMALL LETTER NOW |
| 0577 | շ | ARMENIAN SMALL LETTER SHA |
| 0578 | ո | ARMENIAN SMALL LETTER VO |
| 0579 | չ | ARMENIAN SMALL LETTER CHA |
| 057A | պ | ARMENIAN SMALL LETTER PEH |
| 057B | Ջ | ARMENIAN SMALL LETTER JHEH |
| 057C | ր | ARMENIAN SMALL LETTER RA |
| 057D | ս | ARMENIAN SMALL LETTER SEH |
| 057E | վ | ARMENIAN SMALL LETTER VEV |
| 057F | տ | ARMENIAN SMALL LETTER TIWN |
| 0580 | ր | ARMENIAN SMALL LETTER REH |
| 0581 | ց | ARMENIAN SMALL LETTER CO |
| 0582 | ւ | ARMENIAN SMALL LETTER YIWN |
| 0583 | փ | ARMENIAN SMALL LETTER PIWR |
| 0584 | ք | ARMENIAN SMALL LETTER KEH |
| 0585 | օ | ARMENIAN SMALL LETTER OH |
| 0586 | ֆ | ARMENIAN SMALL LETTER FEH |
| 0587 | և | ARMENIAN SMALL LIGATURE ECH YIWN ≈ 0565 ե 0582 լ |

Punctuation

| | | |
|------|---|---|
| 0589 | : | ARMENIAN FULL STOP = vertsaket • may also be used for historic Georgian texts → 003A : colon |
| 058A | – | ARMENIAN HYPHEN = yentamna |

Religious symbols

| | | |
|------|---|---|
| 058D | ☿ | RIGHT-FACING ARMENIAN ETERNITY SIGN |
| 058E | ☿ | LEFT-FACING ARMENIAN ETERNITY SIGN • maps to AST 34.005:1997 |

Currency symbol

| | | |
|------|---|--------------------|
| 058F | ֏ | ARMENIAN DRAM SIGN |
|------|---|--------------------|

| | 060 | 061 | 062 | 063 | 064 | 065 | 066 | 067 | 068 | 069 | 06A | 06B | 06C | 06D | 06E | 06F |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 0 | | ي | ي | ذ | - | ◌ِ | ◌ِ | ◌ِ | ي | ذ | غ | گ | ه | ي | ◌ِ | ◌ِ |
| 1 | | ي | ء | ر | ف | ◌ِ | ◌ِ | أ | ح | ر | ف | گ | ه | ي | ◌ِ | ◌ِ |
| 2 | | ي | آ | ز | ق | ◌ِ | ◌ِ | أ | خ | ز | ب | گ | ه | ل | ◌ِ | ◌ِ |
| 3 | | ي | أ | س | ك | ◌ِ | ◌ِ | أ | ح | ر | ب | گ | ه | ل | ◌ِ | ◌ِ |
| 4 | | ي | ؤ | ش | ل | ◌ِ | ◌ِ | ء | ح | ر | ف | گ | ه | - | ◌ِ | ◌ِ |
| 5 | | ي | إ | ص | م | ◌ِ | ◌ِ | أ | خ | ر | ب | ل | و | ه | ر | ◌ِ |
| 6 | | ي | ئ | ض | ن | ◌ِ | ◌ِ | ؤ | ح | ب | ف | ل | و | ◌ِ | ◌ِ | ◌ِ |
| 7 | | ي | ا | ط | ه | ◌ِ | ◌ِ | ؤ | ح | ز | ف | ل | و | ◌ِ | ◌ِ | ◌ِ |
| 8 | ي | ◌ِ | ب | ظ | و | ◌ِ | ◌ِ | ئ | د | ث | ف | ل | و | ◌ِ | ◌ِ | ◌ِ |
| 9 | ٪ | ◌ِ | ة | ع | ي | ◌ِ | ◌ِ | ٹ | د | ث | ك | ب | و | ◌ِ | | ◌ِ |
| A | ٪ | ◌ِ | ت | غ | ي | ◌ِ | ٪ | ن | ب | ب | ك | ر | ق | ◌ِ | ◌ِ | بش |
| B | ف | ؛ | ث | ك | ◌ِ | ◌ِ | ر | ب | ب | ب | ك | ل | و | ◌ِ | ◌ِ | ض |
| C | ، | | ج | ك | ◌ِ | ◌ِ | ، | ب | د | ث | ك | ب | ي | ◌ِ | ◌ِ | غ |
| D | ، | | ح | ئ | ◌ِ | ◌ِ | * | ت | د | ب | ك | ن | ي | | ◌ِ | ء |
| E | م | ؛ | خ | ئ | ◌ِ | ◌ِ | ب | ب | ث | ض | ك | ه | ي | | د | م |
| F | ع | ؟ | د | ث | ◌ِ | ◌ِ | ف | ت | د | ظ | گ | خ | ف | ◌ِ | ر | ه |

Subtending marks

| | | |
|------|---|------------------------|
| 0600 | ☐ | ARABIC NUMBER SIGN |
| 0601 | ☐ | ARABIC SIGN SANAH |
| 0602 | ☐ | ARABIC FOOTNOTE MARKER |
| 0603 | ☐ | ARABIC SIGN SAFHA |
| 0604 | ☐ | ARABIC SIGN SAMVAT |

- used for writing Samvat era dates in Urdu

Supertending mark

| | | |
|------|---|--------------------------|
| 0605 | ☐ | ARABIC NUMBER MARK ABOVE |
|------|---|--------------------------|

- may be used with Coptic Epact numbers

Radix symbols

| | | |
|------|---|--------------------------|
| 0606 | ∛ | ARABIC-INDIC CUBE ROOT |
| | | → 221B ∛ cube root |
| 0607 | ∜ | ARABIC-INDIC FOURTH ROOT |
| | | → 221C ∜ fourth root |

Letterlike symbol

| | | |
|------|---|------------|
| 0608 | ﺀ | ARABIC RAY |
|------|---|------------|

Punctuation

| | | |
|------|---|------------------------------------|
| 0609 | ‰ | ARABIC-INDIC PER MILLE SIGN |
| | | → 2030 ‰ per mille sign |
| 060A | ‱ | ARABIC-INDIC PER TEN THOUSAND SIGN |
| | | → 2031 ‱ per ten thousand sign |

Currency sign

| | | |
|------|---|--------------|
| 060B | ؄ | AFGHANI SIGN |
|------|---|--------------|

Punctuation

| | | |
|------|---|---|
| 060C | ٫ | ARABIC COMMA |
| | | • also used with Thaana and Syriac in modern text |
| | | → 002C ٫ comma |
| | | → 2E32 ٫ turned comma |
| 060D | ٫ | ARABIC DATE SEPARATOR |

Poetic marks

| | | |
|------|---|--------------------------|
| 060E | ﻋ | ARABIC POETIC VERSE SIGN |
| 060F | ﻋ | ARABIC SIGN MISRA |

Honorifics

| | | |
|------|---|--|
| 0610 | ﻋ | ARABIC SIGN SALLALLAHOU ALAYHE WASSALLAM |
| | | • represents sallallahu alayhe wasallam “may God’s peace and blessings be upon him” |
| 0611 | ﻋ | ARABIC SIGN ALAYHE ASSALLAM |
| | | • represents alayhe assalam “upon him be peace” |
| 0612 | ﻋ | ARABIC SIGN RAHMATULLAH ALAYHE |
| | | • represents rahmatullah alayhe “may God have mercy upon him” |
| 0613 | ﻋ | ARABIC SIGN RADI ALLAHOU ANHU |
| | | • represents radi allahu ‘anhu “may God be pleased with him” |
| 0614 | ﻋ | ARABIC SIGN TAKHALLUS |
| | | • sign placed over the name or nom-de-plume of a poet, or in some writings used to mark all proper names |

Koranic annotation sign

| | | |
|------|---|--|
| 0615 | ﻋ | ARABIC SMALL HIGH TAH |
| | | • marks a recommended pause position in some Korans published in Iran and Pakistan |
| | | • should not be confused with the small TAH sign used as a diacritic for some letters such as 0679 ﺕ |

Extended Arabic mark

| | | |
|------|---|--|
| 0616 | ﻋ | ARABIC SMALL HIGH LIGATURE ALEF WITH LAM WITH YEHA |
| | | • early Persian |

Koranic annotation signs

| | | |
|------|---|--|
| 0617 | ﻋ | ARABIC SMALL HIGH ZAIN |
| 0618 | ﻋ | ARABIC SMALL FATHA |
| | | • should not be confused with 064E ﻋ FATHA |
| 0619 | ﻋ | ARABIC SMALL DAMMA |
| | | • should not be confused with 064F ﻋ DAMMA |
| 061A | ﻋ | ARABIC SMALL KASRA |
| | | • should not be confused with 0650 ﻋ KASRA |

Punctuation

| | | |
|------|---|---|
| 061B | ﻋ | ARABIC SEMICOLON |
| | | • also used with Thaana and Syriac in modern text |
| | | → 003B ٫ semicolon |
| | | → 2E35 ٫ turned semicolon |
| 061C | ☐ | <reserved> |
| 061D | ☐ | <reserved> |
| 061E | ⋯ | ARABIC TRIPLE DOT PUNCTUATION MARK |
| 061F | ﻋ | ARABIC QUESTION MARK |
| | | • also used with Thaana and Syriac in modern text |
| | | → 003F ﻋ question mark |
| | | → 2E2E ﻋ reversed question mark |

Addition for Kashmiri

| | | |
|------|---|-----------------------------|
| 0620 | ﻋ | ARABIC LETTER KASHMIRI YEHA |
|------|---|-----------------------------|

Based on ISO 8859-6

Arabic letter names follow romanization conventions derived from ISO 8859-6. These differ from the Literary Arabic pronunciation of the letter names. For example, U+0628 ARABIC LETTER BEH has a Literary Arabic pronunciation of *ba*.

| | | |
|------|---|--|
| 0621 | ﺀ | ARABIC LETTER HAMZA |
| | | → 02BE ʾ modifier letter right half ring |
| 0622 | ﺀ | ARABIC LETTER ALEF WITH MADDA ABOVE |
| | | ≡ 0627 ¹ 0653 ﻋ |
| 0623 | ﺀ | ARABIC LETTER ALEF WITH HAMZA ABOVE |
| | | ≡ 0627 ¹ 0654 ﻋ |
| 0624 | ﺀ | ARABIC LETTER WAW WITH HAMZA ABOVE |
| | | ≡ 0648 ﻭ 0654 ﻋ |
| 0625 | ﺀ | ARABIC LETTER ALEF WITH HAMZA BELOW |
| | | ≡ 0627 ¹ 0655 ﻋ |
| 0626 | ﺀ | ARABIC LETTER YEHA WITH HAMZA ABOVE |
| | | ≡ 064A ﻲ 0654 ﻋ |
| 0627 | ﺀ | ARABIC LETTER ALEF |
| 0628 | ﺀ | ARABIC LETTER BEH |
| 0629 | ﺀ | ARABIC LETTER TEH MARBUTA |
| 062A | ﺀ | ARABIC LETTER TEH |
| 062B | ﺀ | ARABIC LETTER THEH |
| 062C | ﺀ | ARABIC LETTER JEEM |
| 062D | ﺀ | ARABIC LETTER HAH |
| 062E | ﺀ | ARABIC LETTER KHAH |
| 062F | ﺀ | ARABIC LETTER DAL |
| 0630 | ﺀ | ARABIC LETTER THAL |
| 0631 | ﺀ | ARABIC LETTER REH |
| 0632 | ﺀ | ARABIC LETTER ZAIN |
| 0633 | ﺀ | ARABIC LETTER SEEN |
| 0634 | ﺀ | ARABIC LETTER SHEEN |

- 0635 ص ARABIC LETTER SAD
 0636 ض ARABIC LETTER DAD
 0637 ط ARABIC LETTER TAH
 0638 ظ ARABIC LETTER ZAH
 0639 ع ARABIC LETTER AIN
 → 01B9 ع latin small letter ezh reversed
 → 02BF ع modifier letter left half ring
- 063A غ ARABIC LETTER GHAIN
- Additions for early Persian and Azerbaijani**
- 063B ک ARABIC LETTER KEHEH WITH TWO DOTS ABOVE
 063C کپ ARABIC LETTER KEHEH WITH THREE DOTS BELOW
 063D ئ ARABIC LETTER FARSI YEH WITH INVERTED V
 • Azerbaijani
 063E ئي ARABIC LETTER FARSI YEH WITH TWO DOTS ABOVE
 063F ئى ARABIC LETTER FARSI YEH WITH THREE DOTS ABOVE

Based on ISO 8859-6

- 0640 - ARABIC TATWEEL
 = kashida
 • inserted to stretch characters
 • also used with Syriac
- 0641 ف ARABIC LETTER FEH
 0642 ق ARABIC LETTER QAF
 0643 ك ARABIC LETTER KAF
 0644 ل ARABIC LETTER LAM
 0645 م ARABIC LETTER MEEM
 0646 ن ARABIC LETTER NOON
 0647 ه ARABIC LETTER HEH
 0648 و ARABIC LETTER WAW
 0649 ی ARABIC LETTER ALEF MAKSURA
 • represents YEH-shaped letter with no dots in any positional form
 • not intended for use in combination with 0654 َ
 → 0626 ئي arabic letter yeh with hamza above
- 064A ي ARABIC LETTER YEH
 • loses its dots when used in combination with 0654 َ
 • retains its dots when used in combination with other combining marks

Points from ISO 8859-6

- 064B ٲ ARABIC FATHATAN
 064C ٳ ARABIC DAMMATAN
 064D ٴ ARABIC KASRATAN
 064E ٶ ARABIC FATHA
 064F ٷ ARABIC DAMMA
 0650 ٸ ARABIC KASRA
 0651 ٺ ARABIC SHADDA
 0652 ٽ ARABIC SUKUN
 • marks absence of a vowel after the base consonant
 • used in some Korans to mark a long vowel as ignored
 • can have a variety of shapes, including a circular one and a shape that looks like 'ٺ'
 → 06E1 ٺ arabic small high dotless head of khah

Combining maddah and hamza

- 0653 ٿ ARABIC MADDAH ABOVE

- 0654 ٰ ARABIC HAMZA ABOVE
 • not restricted to hamza semantics
 • may also occur as a diacritic forming new letters

- 0655 ٱ ARABIC HAMZA BELOW

Other combining marks

- 0656 ٲ ARABIC SUBSCRIPT ALEF
 0657 ٳ ARABIC INVERTED DAMMA
 = ulfa pesh
 • Kashmiri, Urdu
- 0658 ٴ ARABIC MARK NOON GHUNNA
 • Baluchi
 • indicates nasalization in Urdu
- 0659 ٶ ARABIC ZWARAKAY
 • Pashto
- 065A ٷ ARABIC VOWEL SIGN SMALL V ABOVE
 • African languages
- 065B ٸ ARABIC VOWEL SIGN INVERTED SMALL V ABOVE
 • African languages
- 065C ٹ ARABIC VOWEL SIGN DOT BELOW
 • African languages
- 065D ٺ ARABIC REVERSED DAMMA
 • Ormuri, African languages
- 065E ٽ ARABIC FATHA WITH TWO DOTS
 • Kalami
- 065F ٿ ARABIC WAVY HAMZA BELOW
 • Kashmiri

Arabic-Indic digits

These digits are used with Arabic proper; for languages of Iran, Pakistan, and India, see the Eastern Arabic-Indic digits at 06F0..06F9.

- 0660 ٠ ARABIC-INDIC DIGIT ZERO
 0661 ١ ARABIC-INDIC DIGIT ONE
 0662 ٢ ARABIC-INDIC DIGIT TWO
 0663 ٣ ARABIC-INDIC DIGIT THREE
 0664 ٤ ARABIC-INDIC DIGIT FOUR
 0665 ٥ ARABIC-INDIC DIGIT FIVE
 0666 ٦ ARABIC-INDIC DIGIT SIX
 0667 ٧ ARABIC-INDIC DIGIT SEVEN
 0668 ٨ ARABIC-INDIC DIGIT EIGHT
 0669 ٩ ARABIC-INDIC DIGIT NINE

Punctuation

- 066A ٪ ARABIC PERCENT SIGN
 → 0025 % percent sign
- 066B ٫ ARABIC DECIMAL SEPARATOR
 066C ٫ ARABIC THOUSANDS SEPARATOR
 → 0027 ' apostrophe
 → 2019 ' right single quotation mark
- 066D * ARABIC FIVE POINTED STAR
 • appearance rather variable
 → 002A * asterisk

Archaic letters

- 066E ٷ ARABIC LETTER DOTLESS BEH
 066F ٸ ARABIC LETTER DOTLESS QAF

Point

- 0670 ٰ ARABIC LETTER SUPERSCRIPIT ALEF
 • actually a vowel sign, despite the name

Extended Arabic letters

- 0671 ا ARABIC LETTER ALEF WASLA
• Koranic Arabic
- 0672 آ ARABIC LETTER ALEF WITH WAVY HAMZA ABOVE
• Baluchi, Kashmiri

Deprecated letter

- 0673 آ ARABIC LETTER ALEF WITH WAVY HAMZA BELOW
• Kashmiri
• this character is deprecated and its use is strongly discouraged
• use the sequence 0627 ا 065F ٓ instead

Extended Arabic letters

- 0674 ء ARABIC LETTER HIGH HAMZA
• Kazakh
• forms digraphs
- 0675 آ ARABIC LETTER HIGH HAMZA ALEF
• Kazakh
≈ 0627 ا 0674 ء
- 0676 و ARABIC LETTER HIGH HAMZA WAW
• Kazakh
≈ 0648 و 0674 ء
- 0677 ؤ ARABIC LETTER U WITH HAMZA ABOVE
• Kazakh
≈ 06C7 ؤ 0674 ء
- 0678 عي ARABIC LETTER HIGH HAMZA YEH
• Kazakh
≈ 064A عي 0674 ء
- 0679 ث ARABIC LETTER TTEH
• Urdu
- 067A ت ARABIC LETTER TTEHEH
• Sindhi
- 067B ب ARABIC LETTER BEEH
• Sindhi
- 067C تٓ ARABIC LETTER TEH WITH RING
• Pashto
- 067D تٓ ARABIC LETTER TEH WITH THREE DOTS ABOVE DOWNWARDS
• Sindhi
- 067E پ ARABIC LETTER PEH
• Persian, Urdu, ...
- 067F تٓ ARABIC LETTER TEHEH
• Sindhi
- 0680 پٓ ARABIC LETTER BEHEH
• Sindhi
- 0681 خٓ ARABIC LETTER HAH WITH HAMZA ABOVE
• Pashto letter "dze"
- 0682 خٓ ARABIC LETTER HAH WITH TWO DOTS VERTICAL ABOVE
• not used in modern Pashto
- 0683 حٓ ARABIC LETTER NYEH
• Sindhi
- 0684 حٓ ARABIC LETTER DYEH
• Sindhi
- 0685 خٓ ARABIC LETTER HAH WITH THREE DOTS ABOVE
• Pashto, Khwarazmian
- 0686 حٓ ARABIC LETTER TCHEH
• Persian, Urdu, ...
- 0687 حٓ ARABIC LETTER TCHEHEH
• Sindhi

- 0688 ذٓ ARABIC LETTER DDAL
• Urdu
- 0689 دٓ ARABIC LETTER DAL WITH RING
• Pashto
- 068A دٓ ARABIC LETTER DAL WITH DOT BELOW
• Sindhi, early Persian
- 068B ذٓ ARABIC LETTER DAL WITH DOT BELOW AND SMALL TAH
• Lahnda
- 068C دٓ ARABIC LETTER DAHAL
• Sindhi
- 068D دٓ ARABIC LETTER DDAHAL
• Sindhi
- 068E ذٓ ARABIC LETTER DUL
• older shape for DUL, now obsolete in Sindhi
• Burushaski
- 068F دٓ ARABIC LETTER DAL WITH THREE DOTS ABOVE DOWNWARDS
• Sindhi
• current shape used for DUL
- 0690 دٓ ARABIC LETTER DAL WITH FOUR DOTS ABOVE
• old Urdu, not in current use
- 0691 زٓ ARABIC LETTER RREH
• Urdu
- 0692 زٓ ARABIC LETTER REH WITH SMALL V
• Kurdish
- 0693 رٓ ARABIC LETTER REH WITH RING
• Pashto
- 0694 رٓ ARABIC LETTER REH WITH DOT BELOW
• Kurdish, early Persian
- 0695 رٓ ARABIC LETTER REH WITH SMALL V BELOW
• Kurdish
- 0696 رٓ ARABIC LETTER REH WITH DOT BELOW AND DOT ABOVE
• Pashto
- 0697 زٓ ARABIC LETTER REH WITH TWO DOTS ABOVE
• Dargwa
- 0698 زٓ ARABIC LETTER JEH
• Persian, Urdu, ...
- 0699 زٓ ARABIC LETTER REH WITH FOUR DOTS ABOVE
• Sindhi
- 069A سٓ ARABIC LETTER SEEN WITH DOT BELOW AND DOT ABOVE
• Pashto
- 069B سٓ ARABIC LETTER SEEN WITH THREE DOTS BELOW
• early Persian
- 069C سٓ ARABIC LETTER SEEN WITH THREE DOTS BELOW AND THREE DOTS ABOVE
• Moroccan Arabic
- 069D صٓ ARABIC LETTER SAD WITH TWO DOTS BELOW
• Turkic
- 069E ضٓ ARABIC LETTER SAD WITH THREE DOTS ABOVE
• Berber, Burushaski
- 069F ظٓ ARABIC LETTER TAH WITH THREE DOTS ABOVE
• old Hausa
- 06A0 غٓ ARABIC LETTER AIN WITH THREE DOTS ABOVE
• old Malay
- 06A1 فٓ ARABIC LETTER DOTLESS FEH
• Adighe
- 06A2 فٓ ARABIC LETTER FEH WITH DOT MOVED BELOW
• Maghrib Arabic

| | | | | | |
|------|---|---|---------------------------------|---|--|
| 06A3 | ف | ARABIC LETTER FEH WITH DOT BELOW | 06C0 | ه | ARABIC LETTER HEH WITH YEH ABOVE = arabic letter hamzah on ha (1.0) = izafet |
| 06A4 | ث | ARABIC LETTER VEH | | | • Urdu |
| | | • Middle Eastern Arabic for foreign words | | | • actually a ligature, not an independent letter |
| | | • Kurdish, Khwarazmian, early Persian | | | ≡ 06D5 • 0654 ّ |
| 06A5 | پ | ARABIC LETTER FEH WITH THREE DOTS BELOW | 06C1 | ه | ARABIC LETTER HEH GOAL |
| | | • North African Arabic for foreign words | | | • Urdu |
| 06A6 | ق | ARABIC LETTER PEHEH | 06C2 | ه | ARABIC LETTER HEH GOAL WITH HAMZA ABOVE |
| | | • Sindhi | | | • Urdu |
| 06A7 | ف | ARABIC LETTER QAF WITH DOT ABOVE | | | • actually a ligature, not an independent letter |
| | | • Maghrib Arabic | | | ≡ 06C1 ~ 0654 ّ |
| 06A8 | ث | ARABIC LETTER QAF WITH THREE DOTS ABOVE | 06C3 | ه | ARABIC LETTER TEH MARBUTA GOAL |
| | | • Tunisian Arabic | | | • Urdu |
| 06A9 | ک | ARABIC LETTER KEHEH | 06C4 | و | ARABIC LETTER WAW WITH RING |
| | | • Persian, Urdu, ... | | | • Kashmiri |
| 06AA | ڪ | ARABIC LETTER SWASH KAF | 06C5 | و | ARABIC LETTER KIRGHIZ OE |
| 06AB | ک | ARABIC LETTER KAF WITH RING | | | • Kirghiz |
| | | • Pashto | 06C6 | ؤ | ARABIC LETTER OE |
| | | • may appear like an Arabic KAF (0643 ک) with a ring below the base | | | • Uighur, Kurdish, Kazakh, Azerbaijani |
| 06AC | ك | ARABIC LETTER KAF WITH DOT ABOVE | 06C7 | ۇ | ARABIC LETTER U |
| | | • old Malay | | | • Kirghiz, Azerbaijani |
| 06AD | ڭ | ARABIC LETTER NG | 06C8 | ۈ | ARABIC LETTER YU |
| | | • Uighur, Kazakh, old Malay, early Persian, ... | | | • Uighur |
| 06AE | ڳ | ARABIC LETTER KAF WITH THREE DOTS BELOW | 06C9 | ۉ | ARABIC LETTER KIRGHIZ YU |
| | | • Berber, early Persian | | | • Kazakh, Kirghiz |
| 06AF | گ | ARABIC LETTER GAF | 06CA | ۆ | ARABIC LETTER WAW WITH TWO DOTS ABOVE |
| | | • Persian, Urdu, ... | | | • Kurdish |
| 06B0 | گ | ARABIC LETTER GAF WITH RING | 06CB | ۋ | ARABIC LETTER VE |
| | | • Lahnda | | | • Uighur, Kazakh |
| 06B1 | گ | ARABIC LETTER NGOEH | 06CC | ی | ARABIC LETTER FARSI YEH |
| | | • Sindhi | | | • Arabic, Persian, Urdu, Kashmiri, ... |
| 06B2 | گ | ARABIC LETTER GAF WITH TWO DOTS BELOW | | | • initial and medial forms of this letter have dots |
| | | • not used in Sindhi | | | → 0649 ی arabic letter alef maksura |
| 06B3 | گ | ARABIC LETTER GUEH | | | → 064A ی arabic letter yeh |
| | | • Sindhi | 06CD | ی | ARABIC LETTER YEH WITH TAIL |
| 06B4 | گ | ARABIC LETTER GAF WITH THREE DOTS ABOVE | | | • Pashto, Sindhi |
| | | • not used in Sindhi | 06CE | ی | ARABIC LETTER YEH WITH SMALL V |
| 06B5 | ل | ARABIC LETTER LAM WITH SMALL V | | | • Kurdish |
| | | • Kurdish | 06CF | ز | ARABIC LETTER WAW WITH DOT ABOVE |
| 06B6 | ل | ARABIC LETTER LAM WITH DOT ABOVE | 06D0 | ې | ARABIC LETTER E |
| | | • Kurdish | | | • Pashto, Uighur |
| 06B7 | ل | ARABIC LETTER LAM WITH THREE DOTS ABOVE | | | • used as the letter bbeh in Sindhi |
| | | • Kurdish | 06D1 | ې | ARABIC LETTER YEH WITH THREE DOTS BELOW |
| 06B8 | پ | ARABIC LETTER LAM WITH THREE DOTS BELOW | | | • old Malay |
| 06B9 | ن | ARABIC LETTER NOON WITH DOT BELOW | 06D2 | ے | ARABIC LETTER YEH BARREE |
| 06BA | ن | ARABIC LETTER NOON GHUNNA | | | • Urdu |
| | | • Urdu | 06D3 | ے | ARABIC LETTER YEH BARREE WITH HAMZA ABOVE |
| 06BB | ن | ARABIC LETTER RNOON | | | • Urdu |
| | | • Sindhi | | | • actually a ligature, not an independent letter |
| 06BC | ن | ARABIC LETTER NOON WITH RING | | | ≡ 06D2 ے 0654 ّ |
| | | • Pashto | Punctuation | | |
| 06BD | ن | ARABIC LETTER NOON WITH THREE DOTS ABOVE | 06D4 | - | ARABIC FULL STOP |
| | | • old Malay | | | • Urdu |
| 06BE | ه | ARABIC LETTER HEH DOACHASHMEE | Extended Arabic letter | | |
| | | • Urdu | 06D5 | ء | ARABIC LETTER AE |
| | | • forms aspirate digraphs | | | • Uighur, Kazakh, Kirghiz |
| 06BF | ح | ARABIC LETTER TCHEH WITH DOT ABOVE | Koranic annotation signs | | |
| | | | 06D6 | ّ | ARABIC SMALL HIGH LIGATURE SAD WITH LAM WITH ALEF MAKSURA |

| | | |
|------|----|--|
| 06D7 | ◌ٲ | ARABIC SMALL HIGH LIGATURE QAF WITH LAM WITH ALEF MAKSURA |
| 06D8 | ◌ٲ | ARABIC SMALL HIGH MEEM INITIAL FORM |
| 06D9 | ◌ٲ | ARABIC SMALL HIGH LAM ALEF |
| 06DA | ◌ٲ | ARABIC SMALL HIGH JEEM |
| 06DB | ◌ٲ | ARABIC SMALL HIGH THREE DOTS |
| 06DC | ◌ٲ | ARABIC SMALL HIGH SEEN |
| 06DD | ◌ٲ | ARABIC END OF AYAH |
| 06DE | ◌ٲ | ARABIC START OF RUB EL HIZB |
| 06DF | ◌ٲ | ARABIC SMALL HIGH ROUNDED ZERO <ul style="list-style-type: none"> • smaller than the typical circular shape used for 0652 ◌ٲ |
| 06E0 | ◌ٲ | ARABIC SMALL HIGH UPRIGHT RECTANGULAR ZERO |
| 06E1 | ◌ٲ | ARABIC SMALL HIGH DOTLESS HEAD OF KHAH = Arabic jazm <ul style="list-style-type: none"> • presentation form of 0652 ◌ٲ, using font technology to select the variant is preferred • used in some Korans to mark absence of a vowel → 0652 ◌ٲ arabic sukun |
| 06E2 | ◌ٲ | ARABIC SMALL HIGH MEEM ISOLATED FORM |
| 06E3 | ◌ٲ | ARABIC SMALL LOW SEEN |
| 06E4 | ◌ٲ | ARABIC SMALL HIGH MADDA |
| 06E5 | ◌ٲ | ARABIC SMALL WAW |
| 06E6 | ◌ٲ | ARABIC SMALL YEH |
| 06E7 | ◌ٲ | ARABIC SMALL HIGH YEH |
| 06E8 | ◌ٲ | ARABIC SMALL HIGH NOON |
| 06E9 | ◌ٲ | ARABIC PLACE OF SAJDAH <ul style="list-style-type: none"> • there is a range of acceptable glyphs for this character |
| 06EA | ◌ٲ | ARABIC EMPTY CENTRE LOW STOP |
| 06EB | ◌ٲ | ARABIC EMPTY CENTRE HIGH STOP |
| 06EC | ◌ٲ | ARABIC ROUNDED HIGH STOP WITH FILLED CENTRE |
| 06ED | ◌ٲ | ARABIC SMALL LOW MEEM |

Extended Arabic letters for Parkari

| | | |
|------|----|--|
| 06EE | ◌ٲ | ARABIC LETTER DAL WITH INVERTED V |
| 06EF | ◌ٲ | ARABIC LETTER REH WITH INVERTED V <ul style="list-style-type: none"> • also used in early Persian |

Eastern Arabic-Indic digits

These digits are used with Arabic-script languages of Iran, Pakistan, and India (Persian, Sindhi, Urdu, etc.). For details of variations in preferred glyphs, see the block description for the Arabic script.

| | | |
|------|---|--|
| 06F0 | ٠ | EXTENDED ARABIC-INDIC DIGIT ZERO |
| 06F1 | ١ | EXTENDED ARABIC-INDIC DIGIT ONE |
| 06F2 | ٢ | EXTENDED ARABIC-INDIC DIGIT TWO |
| 06F3 | ٣ | EXTENDED ARABIC-INDIC DIGIT THREE |
| 06F4 | ٤ | EXTENDED ARABIC-INDIC DIGIT FOUR <ul style="list-style-type: none"> • Persian has a different glyph than Sindhi and Urdu |
| 06F5 | ٥ | EXTENDED ARABIC-INDIC DIGIT FIVE <ul style="list-style-type: none"> • Persian, Sindhi, and Urdu share glyph different from Arabic |
| 06F6 | ٦ | EXTENDED ARABIC-INDIC DIGIT SIX <ul style="list-style-type: none"> • Persian, Sindhi, and Urdu have glyphs different from Arabic |
| 06F7 | ٧ | EXTENDED ARABIC-INDIC DIGIT SEVEN <ul style="list-style-type: none"> • Urdu and Sindhi have glyphs different from Arabic |
| 06F8 | ٨ | EXTENDED ARABIC-INDIC DIGIT EIGHT |

| | | |
|------|---|----------------------------------|
| 06F9 | ٩ | EXTENDED ARABIC-INDIC DIGIT NINE |
|------|---|----------------------------------|

Extended Arabic letters

| | | |
|------|---|------------------------------------|
| 06FA | ٲ | ARABIC LETTER SHEEN WITH DOT BELOW |
| 06FB | ٲ | ARABIC LETTER DAD WITH DOT BELOW |
| 06FC | ٲ | ARABIC LETTER GHAIN WITH DOT BELOW |

Signs for Sindhi

| | | |
|------|---|-------------------------------------|
| 06FD | ٲ | ARABIC SIGN SINDHI AMPERSAND |
| 06FE | ٲ | ARABIC SIGN SINDHI POSTPOSITION MEN |

Extended Arabic letter for Parkari

| | | |
|------|---|-----------------------------------|
| 06FF | ٲ | ARABIC LETTER HEH WITH INVERTED V |
|------|---|-----------------------------------|

| | 08A | 08B | 08C | 08D | 08E | 08F |
|---|------------|-----------|-----|-----|-----------|-----------|
| 0 | ب 08A0 | گ 08B0 | | | | ٲ 08F0 |
| 1 | ب 08A1 | ٲ 08B1 | | | | ٲ 08F1 |
| 2 | تج 08A2 | | | | | ٲ 08F2 |
| 3 | ظ 08A3 | | | | | ٲ 08F3 |
| 4 | ثب 08A4 | | | | ٲ 08E4 | ٲ 08F4 |
| 5 | قب 08A5 | | | | ٲ 08E5 | ٲ 08F5 |
| 6 | ع 08A6 | | | | ٲ 08E6 | ٲ 08F6 |
| 7 | ثم 08A7 | | | | ٲ 08E7 | ٲ 08F7 |
| 8 | ئي 08A8 | | | | ٲ 08E8 | ٲ 08F8 |
| 9 | ني 08A9 | | | | ٲ 08E9 | ٲ 08F9 |
| A | ر 08AA | | | | ٲ 08EA | ٲ 08FA |
| B | و 08AB | | | | ٲ 08EB | ٲ 08FB |
| C | ع 08AC | | | | ٲ 08EC | ٲ 08FC |
| D | ا 08AD | | | | ٲ 08ED | ٲ 08FD |
| E | پ 08AE | | | | ٲ 08EE | ٲ 08FE |
| F | س 08AF | | | | ٲ 08EF | ٲ 08FF |

Extended Arabic letters for African languages

08A0 ب ARABIC LETTER BEH WITH SMALL V BELOW

Arabic letter for African languages

08A1 ب ARABIC LETTER BEH WITH HAMZA ABOVE
 08A2 ج ARABIC LETTER JEEM WITH TWO DOTS ABOVE
 08A3 ط ARABIC LETTER TAH WITH TWO DOTS ABOVE
 08A4 فب ARABIC LETTER FEH WITH DOT BELOW AND THREE DOTS ABOVE
 08A5 قب ARABIC LETTER QAF WITH DOT BELOW
 08A6 ثب ARABIC LETTER LAM WITH DOUBLE BAR
 08A7 مب ARABIC LETTER MEEM WITH THREE DOTS ABOVE
 08A8 يي ARABIC LETTER YEH WITH TWO DOTS BELOW AND HAMZA ABOVE
 08A9 يي ARABIC LETTER YEH WITH TWO DOTS BELOW AND DOT ABOVE

Dependent consonants for Rohingya

08AA ر ARABIC LETTER REH WITH LOOP
 = bottya-reh
 08AB و ARABIC LETTER WAW WITH DOT WITHIN
 = nota-wa
 08AC ڤ ARABIC LETTER ROHINGYA YEH
 = bottya-yeh

Arabic letters for European and Central Asian languages

08AD ا ARABIC LETTER LOW ALEF
 • Bashkir, Tatar
 08AE دب ARABIC LETTER DAL WITH THREE DOTS BELOW
 • Belarusian
 08AF هب ARABIC LETTER SAD WITH THREE DOTS BELOW
 • Belarusian
 08B0 گب ARABIC LETTER GAF WITH INVERTED STROKE
 • Crimean Tatar, Chechen, Lak
 08B1 ڤ ARABIC LETTER STRAIGHT WAW
 • Tatar

Extended vowel signs for Rohingya

08E4 َ ARABIC CURLY FATHA
 08E5 ُ ARABIC CURLY DAMMA
 08E6 ِ ARABIC CURLY KASRA
 08E7 ً ARABIC CURLY FATHATAN
 08E8 ٌ ARABIC CURLY DAMMATAN
 08E9 ٍ ARABIC CURLY KASRATAN

Tone marks for Rohingya

08EA ˆ ARABIC TONE ONE DOT ABOVE
 08EB ˆˆ ARABIC TONE TWO DOTS ABOVE
 08EC ˆ ARABIC TONE LOOP ABOVE
 08ED ˘ ARABIC TONE ONE DOT BELOW
 08EE ˘˘ ARABIC TONE TWO DOTS BELOW
 08EF ˘ ARABIC TONE LOOP BELOW

Koranic annotation signs

08F0 ً ARABIC OPEN FATHATAN
 = successive fathatan
 08F1 ٌ ARABIC OPEN DAMMATAN
 = successive dammatan
 08F2 ٍ ARABIC OPEN KASRATAN
 = successive kasratan
 08F3 ُ ARABIC SMALL HIGH WAW

Extended vowel signs for African languages

08F4 ُ ARABIC FATHA WITH RING

08F5 ˆ ARABIC FATHA WITH DOT ABOVE
 08F6 ˘ ARABIC KASRA WITH DOT BELOW
 • also used in Philippine languages
 08F7 ˆ ARABIC LEFT ARROWHEAD ABOVE
 08F8 ˆ ARABIC RIGHT ARROWHEAD ABOVE
 08F9 ˘ ARABIC LEFT ARROWHEAD BELOW
 08FA ˘ ARABIC RIGHT ARROWHEAD BELOW
 08FB ˆˆ ARABIC DOUBLE RIGHT ARROWHEAD ABOVE
 08FC ˆˆ ARABIC DOUBLE RIGHT ARROWHEAD ABOVE WITH DOT
 08FD ˆ ARABIC RIGHT ARROWHEAD ABOVE WITH DOT

Extended vowel sign for Philippine languages

08FE ˆ ARABIC DAMMA WITH DOT

Extended vowel signs

08FF ُ ARABIC MARK SIDEWAYS NOON GHUNNA

| | 090 | 091 | 092 | 093 | 094 | 095 | 096 | 097 |
|---|-----------|-----------|-----------|------------|------------|------------|-----------|------------|
| 0 | ै 0900 | ऐ 0910 | ठ 0920 | र 0930 | ी 0940 | ॐ 0950 | ॠ 0960 | ॡ 0970 |
| 1 | ँ 0901 | ऑ 0911 | ड 0921 | ॠ 0931 | ु 0941 | ं 0951 | ृ 0961 | ं 0971 |
| 2 | ं 0902 | ओ 0912 | ढ 0922 | ल 0932 | ्र 0942 | ्र 0952 | ृ 0962 | ँ 0972 |
| 3 | ः 0903 | ओ 0913 | ण 0923 | ळ 0933 | ृ 0943 | े 0953 | ृ 0963 | अं 0973 |
| 4 | ऐ 0904 | औ 0914 | त 0924 | ळ 0934 | ृ 0944 | े 0954 | । 0964 | आं 0974 |
| 5 | अ 0905 | क 0915 | थ 0925 | व 0935 | ँ 0945 | ँ 0955 | ॥ 0965 | औं 0975 |
| 6 | आ 0906 | ख 0916 | द 0926 | श 0936 | े 0946 | ु 0956 | ० 0966 | अु 0976 |
| 7 | इ 0907 | ग 0917 | ध 0927 | ष 0937 | े 0947 | ु 0957 | १ 0967 | अु 0977 |
| 8 | ई 0908 | घ 0918 | न 0928 | स 0938 | ै 0948 | क 0958 | २ 0968 | ॢ 0978 |
| 9 | उ 0909 | ङ 0919 | न 0929 | ह 0939 | ॉ 0949 | ख 0959 | ३ 0969 | ज़ 0979 |
| A | ऊ 090A | च 091A | प 092A | ं 093A | ो 094A | ग 095A | ४ 096A | ष 097A |
| B | ॠ 090B | छ 091B | फ 092B | ा 093B | ो 094B | ज़ 095B | ५ 096B | ग 097B |
| C | ॡ 090C | ज 091C | ब 092C | ्र 093C | ौ 094C | ड 095C | ६ 096C | ज़ 097C |
| D | ँ 090D | झ 091D | भ 092D | ऽ 093D | ्र 094D | ढ 095D | ७ 096D | १ 097D |
| E | ँ 090E | ञ 091E | म 092E | ा 093E | ि 094E | फ़ 095E | ८ 096E | ड 097E |
| F | ए 090F | ट 091F | य 092F | ि 093F | ौ 094F | य 095F | ९ 096F | ब 097F |

Various signs

| | | |
|------|---|--|
| 0900 | ँ | DEVANAGARI SIGN INVERTED CANDRABINDU = vaidika adhomukha candrabindu |
| 0901 | ं | DEVANAGARI SIGN CANDRABINDU = anunasika → 0310 ँ combining candrabindu |
| 0902 | ॰ | DEVANAGARI SIGN ANUSVARA = bindu |
| 0903 | ः | DEVANAGARI SIGN VISARGA |

Independent vowels

| | | |
|------|---|---|
| 0904 | अ | DEVANAGARI LETTER SHORT A |
| 0905 | आ | DEVANAGARI LETTER A |
| 0906 | इ | DEVANAGARI LETTER AA |
| 0907 | इ | DEVANAGARI LETTER I |
| 0908 | ई | DEVANAGARI LETTER II |
| 0909 | उ | DEVANAGARI LETTER U |
| 090A | ऊ | DEVANAGARI LETTER UU |
| 090B | ऋ | DEVANAGARI LETTER VOCALIC R |
| 090C | ॠ | DEVANAGARI LETTER VOCALIC L |
| 090D | ँ | DEVANAGARI LETTER CANDRA E |
| 090E | ँ | DEVANAGARI LETTER SHORT E • for transcribing Dravidian short e |
| 090F | ए | DEVANAGARI LETTER E |
| 0910 | ऐ | DEVANAGARI LETTER AI |
| 0911 | ऑ | DEVANAGARI LETTER CANDRA O |
| 0912 | ओ | DEVANAGARI LETTER SHORT O • for transcribing Dravidian short o |
| 0913 | औ | DEVANAGARI LETTER O |
| 0914 | औ | DEVANAGARI LETTER AU |

Consonants

| | | |
|------|----|--|
| 0915 | क | DEVANAGARI LETTER KA |
| 0916 | ख | DEVANAGARI LETTER KHA |
| 0917 | ग | DEVANAGARI LETTER GA |
| 0918 | घ | DEVANAGARI LETTER GHA |
| 0919 | ङ | DEVANAGARI LETTER NGA |
| 091A | च | DEVANAGARI LETTER CA |
| 091B | छ | DEVANAGARI LETTER CHA |
| 091C | ज | DEVANAGARI LETTER JA |
| 091D | झ | DEVANAGARI LETTER JHA |
| 091E | ञ | DEVANAGARI LETTER NYA |
| 091F | ट | DEVANAGARI LETTER TTA |
| 0920 | ठ | DEVANAGARI LETTER TTHA |
| 0921 | ड | DEVANAGARI LETTER DDA |
| 0922 | ढ | DEVANAGARI LETTER DDHA |
| 0923 | ण | DEVANAGARI LETTER NNA |
| 0924 | त | DEVANAGARI LETTER TA |
| 0925 | थ | DEVANAGARI LETTER THA |
| 0926 | द | DEVANAGARI LETTER DA |
| 0927 | ध | DEVANAGARI LETTER DHA |
| 0928 | न | DEVANAGARI LETTER NA |
| 0929 | न् | DEVANAGARI LETTER NNNA • for transcribing Dravidian alveolar n ≡ 0928 न 093C ञ |
| 092A | प | DEVANAGARI LETTER PA |
| 092B | फ | DEVANAGARI LETTER PHA |
| 092C | ब | DEVANAGARI LETTER BA |
| 092D | भ | DEVANAGARI LETTER BHA |
| 092E | म | DEVANAGARI LETTER MA |
| 092F | य | DEVANAGARI LETTER YA |
| 0930 | र | DEVANAGARI LETTER RA |

| | | |
|------|---|---|
| 0931 | ऱ | DEVANAGARI LETTER RRA • for transcribing Dravidian alveolar r • half form is represented as "Eyelash RA" ≡ 0930 र 093C ञ |
| 0932 | ल | DEVANAGARI LETTER LA |
| 0933 | ळ | DEVANAGARI LETTER LLA |
| 0934 | ळ | DEVANAGARI LETTER LLLA • for transcribing Dravidian l ≡ 0933 ळ 093C ञ |
| 0935 | व | DEVANAGARI LETTER VA |
| 0936 | श | DEVANAGARI LETTER SHA |
| 0937 | ष | DEVANAGARI LETTER SSA |
| 0938 | स | DEVANAGARI LETTER SA |
| 0939 | ह | DEVANAGARI LETTER HA |

Dependent vowel signs for Kashmiri

| | | |
|------|---|---------------------------|
| 093A | ॠ | DEVANAGARI VOWEL SIGN OE |
| 093B | ॠ | DEVANAGARI VOWEL SIGN OOE |

Various signs

| | | |
|------|---|--|
| 093C | ॠ | DEVANAGARI SIGN NUKTA • for extending the alphabet to new letters |
| 093D | ऽ | DEVANAGARI SIGN AVAGRAHA |

Dependent vowel signs

| | | |
|------|---|--|
| 093E | ॠ | DEVANAGARI VOWEL SIGN AA |
| 093F | ि | DEVANAGARI VOWEL SIGN I • stands to the left of the consonant |
| 0940 | ी | DEVANAGARI VOWEL SIGN II |
| 0941 | ु | DEVANAGARI VOWEL SIGN U |
| 0942 | ू | DEVANAGARI VOWEL SIGN UU |
| 0943 | ृ | DEVANAGARI VOWEL SIGN VOCALIC R |
| 0944 | ॠ | DEVANAGARI VOWEL SIGN VOCALIC RR |
| 0945 | ँ | DEVANAGARI VOWEL SIGN CANDRA E = candra |
| 0946 | ॠ | DEVANAGARI VOWEL SIGN SHORT E • for transcribing Dravidian vowels |
| 0947 | ॠ | DEVANAGARI VOWEL SIGN E |
| 0948 | ॠ | DEVANAGARI VOWEL SIGN AI |
| 0949 | ऑ | DEVANAGARI VOWEL SIGN CANDRA O |
| 094A | ओ | DEVANAGARI VOWEL SIGN SHORT O • for transcribing Dravidian vowels |
| 094B | औ | DEVANAGARI VOWEL SIGN O |
| 094C | औ | DEVANAGARI VOWEL SIGN AU |

Virama

| | | |
|------|---|--|
| 094D | ् | DEVANAGARI SIGN VIRAMA = halant (the preferred Hindi name) • suppresses inherent vowel |
|------|---|--|

Dependent vowel signs

| | | |
|------|---|---|
| 094E | ि | DEVANAGARI VOWEL SIGN PRISHTHAMATRA E • character has historic use only • combines with E to form AI, with AA to form O, and with O to form AU |
| 094F | ौ | DEVANAGARI VOWEL SIGN AW • Kashmiri |

Sign

| | | |
|------|---|---------------|
| 0950 | ॐ | DEVANAGARI OM |
|------|---|---------------|

Vedic tone marks

- 0951 ◌̄ DEVANAGARI STRESS SIGN UDATTA
= Vedic tone svarita
• mostly used for svarita, with rare use for udatta
• used also in Vedic texts written in other scripts
→ 1CDA ◌̄ vedic tone double svarita
- 0952 ◌̎ DEVANAGARI STRESS SIGN ANUDATTA
= Vedic tone anudatta
• used also in Vedic texts written in other scripts
→ 1CDC ◌̎ vedic tone kathaka anudatta

Accent marks

- 0953 ◌̇ DEVANAGARI GRAVE ACCENT
→ 0300 ◌̇ combining grave accent
- 0954 ◌̆ DEVANAGARI ACUTE ACCENT
→ 0301 ◌̆ combining acute accent

Dependent vowel sign

- 0955 ◌̄̅ DEVANAGARI VOWEL SIGN CANDRA LONG E
• used in transliteration of Avestan

Dependent vowel signs for Kashmiri

- 0956 ◌̄̅̅ DEVANAGARI VOWEL SIGN UE
- 0957 ◌̄̅̅̅ DEVANAGARI VOWEL SIGN UUE

Additional consonants

- 0958 क़ DEVANAGARI LETTER QA
≡ 0915 क़ 093C ◌̣
- 0959 ख़ DEVANAGARI LETTER KHHA
≡ 0916 ख़ 093C ◌̣
- 095A ग़ DEVANAGARI LETTER GHHA
≡ 0917 ग़ 093C ◌̣
- 095B ज़ DEVANAGARI LETTER ZA
≡ 091C ज़ 093C ◌̣
- 095C ड़ DEVANAGARI LETTER DDDHA
≡ 0921 ड़ 093C ◌̣
- 095D ढ़ DEVANAGARI LETTER RHA
≡ 0922 ढ़ 093C ◌̣
- 095E फ़ DEVANAGARI LETTER FA
≡ 092B फ़ 093C ◌̣
- 095F य़ DEVANAGARI LETTER YYA
≡ 092F य़ 093C ◌̣

Additional vowels for Sanskrit

- 0960 ऀ DEVANAGARI LETTER VOCALIC RR
- 0961 ॠ DEVANAGARI LETTER VOCALIC LL
- 0962 ॡ DEVANAGARI VOWEL SIGN VOCALIC L
- 0963 ॢ DEVANAGARI VOWEL SIGN VOCALIC LL

Generic punctuation for scripts of India

These punctuation marks are for common use for the scripts of India despite being named "DEVANAGARI". They also occur as abbreviation signs in some South Indian scripts.

- 0964 । DEVANAGARI DANDA
= purna viram
• phrase separator
- 0965 ॥ DEVANAGARI DOUBLE DANDA
= deergh viram

Digits

- 0966 ० DEVANAGARI DIGIT ZERO
- 0967 १ DEVANAGARI DIGIT ONE
- 0968 २ DEVANAGARI DIGIT TWO
- 0969 ३ DEVANAGARI DIGIT THREE
- 096A ४ DEVANAGARI DIGIT FOUR
- 096B ५ DEVANAGARI DIGIT FIVE

- 096C ६ DEVANAGARI DIGIT SIX
- 096D ७ DEVANAGARI DIGIT SEVEN
- 096E ८ DEVANAGARI DIGIT EIGHT
- 096F ९ DEVANAGARI DIGIT NINE

Abbreviation sign

- 0970 ॰ DEVANAGARI ABBREVIATION SIGN
• intended for Devanagari-specific abbreviations
- 0971 ˙ DEVANAGARI SIGN HIGH SPACING DOT

Independent vowel for Marathi

- 0972 ॡ DEVANAGARI LETTER CANDRA A

Independent vowels for Kashmiri

- 0973 ॠ DEVANAGARI LETTER OE
- 0974 ॡ DEVANAGARI LETTER OOE
- 0975 ॢ DEVANAGARI LETTER AW
- 0976 ॣ DEVANAGARI LETTER UE
- 0977 । DEVANAGARI LETTER UUE

Additional consonants

- 0978 ऀ DEVANAGARI LETTER MARWARI DDA
- 0979 ॠ DEVANAGARI LETTER ZHA
• used in transliteration of Avestan
- 097A य़ DEVANAGARI LETTER HEAVY YA
• used for an affricated glide JJYA

Sindhi implosives

- 097B ॡ DEVANAGARI LETTER GGA
- 097C ॢ DEVANAGARI LETTER JJA

Glottal stop

- 097D ʔ DEVANAGARI LETTER GLOTTAL STOP
• used for writing Limbu in Devanagari
• a glyph variant has the connecting top bar

Sindhi implosives

- 097E ॣ DEVANAGARI LETTER DDDA
- 097F । DEVANAGARI LETTER BBA

| | 0C0 | 0C1 | 0C2 | 0C3 | 0C4 | 0C5 | 0C6 | 0C7 |
|---|-----------|------------|-----------|-----------|-----------|-----------|-----------|-----------|
| 0 | ౦ 0C00 | బ 0C10 | ర 0C20 | ర 0C30 | ్ 0C40 | | ఋ 0C60 | |
| 1 | ౠ 0C01 | | డ 0C21 | ఱ 0C31 | ౡ 0C41 | | ౠ 0C61 | |
| 2 | ౢ 0C02 | బ 0C12 | డ 0C22 | ల 0C32 | ్ 0C42 | | ౡ 0C62 | |
| 3 | ౣ 0C03 | బ 0C13 | ణ 0C23 | ళ 0C33 | ్ 0C43 | | ౡ 0C63 | |
| 4 | | జ్ 0C14 | త 0C24 | | ్ 0C44 | | | |
| 5 | ఱ 0C05 | క 0C15 | ణ 0C25 | ల 0C35 | | ్ 0C55 | | |
| 6 | ఱ 0C06 | ఖ 0C16 | ణ 0C26 | త 0C36 | ్ 0C46 | ్ 0C56 | ౠ 0C66 | |
| 7 | ఱ 0C07 | గ 0C17 | ణ 0C27 | ప 0C37 | ్ 0C47 | | ౠ 0C67 | |
| 8 | ఱ 0C08 | పు 0C18 | న 0C28 | న 0C38 | ్ 0C48 | న 0C58 | ౠ 0C68 | ౠ 0C78 |
| 9 | ఱ 0C09 | జ 0C19 | | ్ 0C39 | | న 0C59 | ౠ 0C69 | ౠ 0C79 |
| A | ఱ 0C0A | చ 0C1A | ప 0C2A | | ్ 0C4A | | ౠ 0C6A | ౠ 0C7A |
| B | ఱ 0C0B | ఛ 0C1B | ప 0C2B | | ్ 0C4B | | ౠ 0C6B | ౠ 0C7B |
| C | ౠ 0C0C | జ 0C1C | బ 0C2C | | ్ 0C4C | | ౠ 0C6C | ౠ 0C7C |
| D | | ర్ 0C1D | ళ 0C2D | ౠ 0C3D | ్ 0C4D | | ౠ 0C6D | ౠ 0C7D |
| E | ౠ 0C0E | ఱ 0C1E | ప 0C2E | ్ 0C3E | | | ౠ 0C6E | ౠ 0C7E |
| F | ౠ 0C0F | ట 0C1F | ౠ 0C2F | ్ 0C3F | | | ౠ 0C6F | ౠ 0C7F |

Various signs

| | | |
|------|----|---|
| 0C00 | ◌̣ | TELUGU SIGN COMBINING CANDRABINDU ABOVE |
| 0C01 | ◌̣ | TELUGU SIGN CANDRABINDU = arasunna |
| 0C02 | ◌̣ | TELUGU SIGN ANUSVARA = sunna |
| 0C03 | ◌̣ | TELUGU SIGN VISARGA |

Independent vowels

| | | |
|------|----|-------------------------|
| 0C05 | అ | TELUGU LETTER A |
| 0C06 | ఆ | TELUGU LETTER AA |
| 0C07 | ఇ | TELUGU LETTER I |
| 0C08 | ఈ | TELUGU LETTER II |
| 0C09 | ఉ | TELUGU LETTER U |
| 0C0A | ఊ | TELUGU LETTER UU |
| 0C0B | ఋ | TELUGU LETTER VOCALIC R |
| 0C0C | ౠ | TELUGU LETTER VOCALIC L |
| 0C0D | ◌̣ | <reserved> |
| 0C0E | ఎ | TELUGU LETTER E |
| 0C0F | ఐ | TELUGU LETTER EE |
| 0C10 | ఔ | TELUGU LETTER AI |
| 0C11 | ◌̣ | <reserved> |
| 0C12 | ఒ | TELUGU LETTER O |
| 0C13 | ఓ | TELUGU LETTER OO |
| 0C14 | ఔ | TELUGU LETTER AU |

Consonants

| | | |
|------|----|--------------------|
| 0C15 | క | TELUGU LETTER KA |
| 0C16 | ఖ | TELUGU LETTER KHA |
| 0C17 | గ | TELUGU LETTER GA |
| 0C18 | ఘ | TELUGU LETTER GHA |
| 0C19 | ఙ | TELUGU LETTER NGA |
| 0C1A | చ | TELUGU LETTER CA |
| 0C1B | ఛ | TELUGU LETTER CHA |
| 0C1C | జ | TELUGU LETTER JA |
| 0C1D | ఝ | TELUGU LETTER JHA |
| 0C1E | ఞ | TELUGU LETTER NYA |
| 0C1F | ట | TELUGU LETTER TTA |
| 0C20 | ఠ | TELUGU LETTER TTHA |
| 0C21 | డ | TELUGU LETTER DDA |
| 0C22 | ఢ | TELUGU LETTER DDHA |
| 0C23 | ణ | TELUGU LETTER NNA |
| 0C24 | త | TELUGU LETTER TA |
| 0C25 | థ | TELUGU LETTER THA |
| 0C26 | ద | TELUGU LETTER DA |
| 0C27 | ధ | TELUGU LETTER DHA |
| 0C28 | న | TELUGU LETTER NA |
| 0C29 | ◌̣ | <reserved> |
| 0C2A | ప | TELUGU LETTER PA |
| 0C2B | ఫ | TELUGU LETTER PHA |
| 0C2C | బ | TELUGU LETTER BA |
| 0C2D | భ | TELUGU LETTER BHA |
| 0C2E | మ | TELUGU LETTER MA |
| 0C2F | య | TELUGU LETTER YA |
| 0C30 | ర | TELUGU LETTER RA |
| 0C31 | ఱ | TELUGU LETTER RRA |
| 0C32 | ల | TELUGU LETTER LA |
| 0C33 | ళ | TELUGU LETTER LLA |
| 0C34 | ◌̣ | <reserved> |
| 0C35 | వ | TELUGU LETTER VA |
| 0C36 | శ | TELUGU LETTER SHA |
| 0C37 | ష | TELUGU LETTER SSA |

| | | |
|------|---|------------------|
| 0C38 | స | TELUGU LETTER SA |
| 0C39 | హ | TELUGU LETTER HA |

Addition for Sanskrit

| | | |
|------|---|----------------------|
| 0C3D | ॐ | TELUGU SIGN AVAGRAHA |
|------|---|----------------------|

Dependent vowel signs

| | | |
|------|----|---|
| 0C3E | ◌̣ | TELUGU VOWEL SIGN AA |
| 0C3F | ◌̣ | TELUGU VOWEL SIGN I |
| 0C40 | ◌̣ | TELUGU VOWEL SIGN II |
| 0C41 | ◌̣ | TELUGU VOWEL SIGN U |
| 0C42 | ◌̣ | TELUGU VOWEL SIGN UU |
| 0C43 | ◌̣ | TELUGU VOWEL SIGN VOCALIC R |
| 0C44 | ◌̣ | TELUGU VOWEL SIGN VOCALIC RR |
| 0C45 | ◌̣ | <reserved> |
| 0C46 | ◌̣ | TELUGU VOWEL SIGN E |
| 0C47 | ◌̣ | TELUGU VOWEL SIGN EE |
| 0C48 | ◌̣ | TELUGU VOWEL SIGN AI ≡ 0C46 ◌̣ 0C56 ◌̣ |
| 0C49 | ◌̣ | <reserved> |
| 0C4A | ◌̣ | TELUGU VOWEL SIGN O |
| 0C4B | ◌̣ | TELUGU VOWEL SIGN OO |
| 0C4C | ◌̣ | TELUGU VOWEL SIGN AU |

Virama

| | | |
|------|----|---|
| 0C4D | ◌̣ | TELUGU SIGN VIRAMA = halant (the preferred name) |
|------|----|---|

Various signs

| | | |
|------|----|-----------------------|
| 0C55 | ◌̣ | TELUGU LENGTH MARK |
| 0C56 | ◌̣ | TELUGU AI LENGTH MARK |

Historic phonetic variants

| | | |
|------|---|-------------------|
| 0C58 | ఱ | TELUGU LETTER TSA |
| 0C59 | ఱ | TELUGU LETTER DZA |

Additional vowels for Sanskrit

| | | |
|------|---|--------------------------|
| 0C60 | ఋ | TELUGU LETTER VOCALIC RR |
| 0C61 | ౠ | TELUGU LETTER VOCALIC LL |

Dependent vowels

| | | |
|------|----|------------------------------|
| 0C62 | ◌̣ | TELUGU VOWEL SIGN VOCALIC L |
| 0C63 | ◌̣ | TELUGU VOWEL SIGN VOCALIC LL |

Reserved

For viram punctuation, use the generic Indic 0964 and 0965.

| | | |
|------|----|---|
| 0C64 | ◌̣ | <reserved> → 0964 I devanagari danda |
| 0C65 | ◌̣ | <reserved> → 0965 II devanagari double danda |

Digits

| | | |
|------|---|--------------------|
| 0C66 | ౦ | TELUGU DIGIT ZERO |
| 0C67 | ౧ | TELUGU DIGIT ONE |
| 0C68 | ౨ | TELUGU DIGIT TWO |
| 0C69 | ౩ | TELUGU DIGIT THREE |
| 0C6A | ౪ | TELUGU DIGIT FOUR |
| 0C6B | ౫ | TELUGU DIGIT FIVE |
| 0C6C | ౬ | TELUGU DIGIT SIX |
| 0C6D | ౭ | TELUGU DIGIT SEVEN |
| 0C6E | ౮ | TELUGU DIGIT EIGHT |
| 0C6F | ౯ | TELUGU DIGIT NINE |

Telugu fractions and weights

| | | |
|------|---|---|
| 0C78 | ౧ | TELUGU FRACTION DIGIT ZERO FOR ODD POWERS OF FOUR |
|------|---|---|

| | | |
|------|---|---|
| 0C79 | | TELUGU FRACTION DIGIT ONE FOR ODD POWERS OF FOUR |
| 0C7A | ᳵ | TELUGU FRACTION DIGIT TWO FOR ODD POWERS OF FOUR |
| 0C7B | ᳶ | TELUGU FRACTION DIGIT THREE FOR ODD POWERS OF FOUR |
| 0C7C | — | TELUGU FRACTION DIGIT ONE FOR EVEN POWERS OF FOUR |
| 0C7D | ᳷ | TELUGU FRACTION DIGIT TWO FOR EVEN POWERS OF FOUR |
| 0C7E | ᳸ | TELUGU FRACTION DIGIT THREE FOR EVEN POWERS OF FOUR |
| 0C7F | ᳹ | TELUGU SIGN TUUMU |

| | 0C8 | 0C9 | 0CA | 0CB | 0CC | 0CD | 0CE | 0CF |
|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 0 | | ಐ 0C90 | ಊ 0CA0 | ಋ 0CB0 | ೠ 0CC0 | | ಋ 0CE0 | |
| 1 | ಃ 0C81 | | ಋ 0CA1 | ೠ 0CB1 | ಃ 0CC1 | | ಋ 0CE1 | ಃ 0CF1 |
| 2 | ಌ 0C82 | ಍ 0C92 | ಊ 0CA2 | ಋ 0CB2 | ೠ 0CC2 | | ಋ 0CE2 | ಌ 0CF2 |
| 3 | ಋ 0C83 | ಉ 0C93 | ಊ 0CA3 | ಋ 0CB3 | ೠ 0CC3 | | ಋ 0CE3 | |
| 4 | | ಋ 0C94 | ಉ 0CA4 | | ಋ 0CC4 | | | |
| 5 | ಋ 0C85 | ಉ 0C95 | ಊ 0CA5 | ಋ 0CB5 | | ಋ 0CD5 | | |
| 6 | ಋ 0C86 | ಉ 0C96 | ಊ 0CA6 | ಋ 0CB6 | ಃ 0CC6 | ಋ 0CD6 | ಌ 0CE6 | |
| 7 | ಋ 0C87 | ಉ 0C97 | ಊ 0CA7 | ಋ 0CB7 | ಃ 0CC7 | | ಌ 0CE7 | |
| 8 | ಋ 0C88 | ಉ 0C98 | ಊ 0CA8 | ಋ 0CB8 | ಃ 0CC8 | | ಌ 0CE8 | |
| 9 | ಋ 0C89 | ಉ 0C99 | | ಋ 0CB9 | | | ಌ 0CE9 | |
| A | ಋ 0C8A | ಉ 0C9A | ಊ 0CAA | | ಃ 0CCA | | ಌ 0CEA | |
| B | ಋ 0C8B | ಉ 0C9B | ಊ 0CAB | | ಃ 0CCB | | ಌ 0CEB | |
| C | ಋ 0C8C | ಉ 0C9C | ಊ 0CAC | ಃ 0CBC | ಃ 0CCC | | ಌ 0CEC | |
| D | | ಋ 0C9D | ಉ 0CAD | ಃ 0CBD | ಃ 0CCD | | ಌ 0CED | |
| E | ಋ 0C8E | ಉ 0C9E | ಊ 0CAE | ಃ 0CBE | | ಋ 0CDE | ಌ 0CEE | |
| F | ಋ 0C8F | ಉ 0C9F | ಊ 0CAF | ಃ 0CBF | | | ಌ 0CEF | |

Signs used in Sanskrit

- 0CF1 ∂ KANNADA SIGN JIHVAMULIYA
→ 1CF5 X vedic sign jihvamuliya
- 0CF2 ∞ KANNADA SIGN UPADHMANIYA
→ 1CF6 ⌘ vedic sign upadhmaniya

| | 0D0 | 0D1 | 0D2 | 0D3 | 0D4 | 0D5 | 0D6 | 0D7 |
|---|-----------|-----------|-----------|-----------|------------|-----------|-----------|-----------|
| 0 | | ഐ 0D10 | ഠ 0D20 | ര 0D30 | ീ 0D40 | | ഋ 0D60 | ൧ 0D70 |
| 1 | ഏ 0D01 | | ഡ 0D21 | റ 0D31 | ൂ 0D41 | | ൺ 0D61 | ൩ 0D71 |
| 2 | ഌ 0D02 | ഒ 0D12 | ഡ 0D22 | ല 0D32 | ു 0D42 | | ൺ 0D62 | ൯ 0D72 |
| 3 | ഃ 0D03 | ഓ 0D13 | ണ 0D23 | ള 0D33 | ്യ 0D43 | | ൺ 0D63 | ൪ 0D73 |
| 4 | | ഔ 0D14 | ത 0D24 | ഴ 0D34 | ൃ 0D44 | | | ൺ 0D74 |
| 5 | അ 0D05 | ക 0D15 | ഥ 0D25 | വ 0D35 | | | | ൺ 0D75 |
| 6 | ആ 0D06 | ഖ 0D16 | ദ 0D26 | ശ 0D36 | െ 0D46 | | ഠ 0D66 | |
| 7 | ഇ 0D07 | ഗ 0D17 | ധ 0D27 | ഷ 0D37 | േ 0D47 | ൌ 0D57 | ൧ 0D67 | |
| 8 | ഈ 0D08 | ഘ 0D18 | ന 0D28 | സ 0D38 | ൈ 0D48 | | ൪ 0D68 | |
| 9 | ഉ 0D09 | ങ 0D19 | ണ 0D29 | ഹ 0D39 | | | ൩ 0D69 | ൯ 0D79 |
| A | ഊ 0D0A | ച 0D1A | പ 0D2A | ട 0D3A | ൊ 0D4A | | ൪ 0D6A | ൺ 0D7A |
| B | ഋ 0D0B | ഘ 0D1B | ഫ 0D2B | | ോ 0D4B | | ൫ 0D6B | ൯ 0D7B |
| C | ൠ 0D0C | ജ 0D1C | ബ 0D2C | | ൌ 0D4C | | ൩ 0D6C | ൪ 0D7C |
| D | | ശ 0D1D | ഭ 0D2D | ഷ 0D3D | ് 0D4D | | ൭ 0D6D | ൺ 0D7D |
| E | ഏ 0D0E | ണ 0D1E | മ 0D2E | ാ 0D3E | | | ൮ 0D6E | ൺ 0D7E |
| F | ഏ 0D0F | ട 0D1F | യ 0D2F | ി 0D3F | | | ൯ 0D6F | ൺ 0D7F |

Various signs

| | | |
|------|-----|----------------------------|
| 0D01 | ◌̣ | MALAYALAM SIGN CANDRABINDU |
| 0D02 | ◌̇ | MALAYALAM SIGN ANUSVARA |
| 0D03 | ◌̈́ | MALAYALAM SIGN VISARGA |

Independent vowels

| | | |
|------|----|----------------------------|
| 0D05 | അ | MALAYALAM LETTER A |
| 0D06 | ആ | MALAYALAM LETTER AA |
| 0D07 | ഇ | MALAYALAM LETTER I |
| 0D08 | ഈ | MALAYALAM LETTER II |
| 0D09 | ഉ | MALAYALAM LETTER U |
| 0D0A | ഊ | MALAYALAM LETTER UU |
| 0D0B | ഋ | MALAYALAM LETTER VOCALIC R |
| 0D0C | ൠ | MALAYALAM LETTER VOCALIC L |
| 0D0D | ◌̣ | <reserved> |
| 0D0E | എ | MALAYALAM LETTER E |
| 0D0F | ഈ | MALAYALAM LETTER EE |
| 0D10 | ഐ | MALAYALAM LETTER AI |
| 0D11 | ◌̣ | <reserved> |
| 0D12 | ഒ | MALAYALAM LETTER O |
| 0D13 | ഓ | MALAYALAM LETTER OO |
| 0D14 | ഔ | MALAYALAM LETTER AU |

Consonants

Alternate romanizations are shown as aliases for some letters to clarify their identity.

| | | |
|------|---|--|
| 0D15 | ക | MALAYALAM LETTER KA |
| 0D16 | ഖ | MALAYALAM LETTER KHA |
| 0D17 | ഗ | MALAYALAM LETTER GA |
| 0D18 | ഘ | MALAYALAM LETTER GHA |
| 0D19 | ങ | MALAYALAM LETTER NGA |
| 0D1A | ച | MALAYALAM LETTER CA = cha |
| 0D1B | ഛ | MALAYALAM LETTER CHA = chha |
| 0D1C | ജ | MALAYALAM LETTER JA |
| 0D1D | ഝ | MALAYALAM LETTER JHA |
| 0D1E | ഞ | MALAYALAM LETTER NYA = nha |
| 0D1F | ട | MALAYALAM LETTER TTA = ta |
| 0D20 | ഠ | MALAYALAM LETTER TTHA = ttha |
| 0D21 | ഡ | MALAYALAM LETTER DDA = hard da |
| 0D22 | ഢ | MALAYALAM LETTER DDHA = hard dda |
| 0D23 | ണ | MALAYALAM LETTER NNA = hard na |
| 0D24 | ത | MALAYALAM LETTER TA = tha |
| 0D25 | ഥ | MALAYALAM LETTER THA = ttha |
| 0D26 | ദ | MALAYALAM LETTER DA = soft da |
| 0D27 | ധ | MALAYALAM LETTER DHA = soft dda |
| 0D28 | ന | MALAYALAM LETTER NA |
| 0D29 | ണ | MALAYALAM LETTER NNNA • historic use only |
| 0D2A | പ | MALAYALAM LETTER PA |
| 0D2B | ഫ | MALAYALAM LETTER PHA |
| 0D2C | ബ | MALAYALAM LETTER BA |

| | | |
|------|---|--|
| 0D2D | ഭ | MALAYALAM LETTER BHA |
| 0D2E | മ | MALAYALAM LETTER MA |
| 0D2F | യ | MALAYALAM LETTER YA |
| 0D30 | ര | MALAYALAM LETTER RA |
| 0D31 | റ | MALAYALAM LETTER RRA |
| 0D32 | ല | MALAYALAM LETTER LA |
| 0D33 | ള | MALAYALAM LETTER LLA |
| 0D34 | ഴ | MALAYALAM LETTER LLLA = zha |
| 0D35 | വ | MALAYALAM LETTER VA |
| 0D36 | ശ | MALAYALAM LETTER SHA = soft sha |
| 0D37 | ഷ | MALAYALAM LETTER SSA = sha |
| 0D38 | സ | MALAYALAM LETTER SA |
| 0D39 | ഹ | MALAYALAM LETTER HA |
| 0D3A | ഠ | MALAYALAM LETTER TTTA • historic use only |

Addition for Sanskrit

| | | |
|------|---|---|
| 0D3D | ഌ | MALAYALAM SIGN AVAGRAHA = praslesham |
|------|---|---|

Dependent vowel signs

| | | |
|------|----|--|
| 0D3E | ◌̣ | MALAYALAM VOWEL SIGN AA |
| 0D3F | ◌̣ | MALAYALAM VOWEL SIGN I |
| 0D40 | ◌̣ | MALAYALAM VOWEL SIGN II |
| 0D41 | ◌̣ | MALAYALAM VOWEL SIGN U |
| 0D42 | ◌̣ | MALAYALAM VOWEL SIGN UU |
| 0D43 | ◌̣ | MALAYALAM VOWEL SIGN VOCALIC R |
| 0D44 | ◌̣ | MALAYALAM VOWEL SIGN VOCALIC RR |
| 0D45 | ◌̣ | <reserved> |
| 0D46 | ◌̣ | MALAYALAM VOWEL SIGN E • stands to the left of the consonant |
| 0D47 | ◌̣ | MALAYALAM VOWEL SIGN EE • stands to the left of the consonant |
| 0D48 | ◌̣ | MALAYALAM VOWEL SIGN AI • stands to the left of the consonant |

Two-part dependent vowel signs

These vowel signs have glyph pieces which stand on both sides of the consonant; they follow the consonant in logical order, and should be handled as a unit for most processing.

| | | |
|------|------|--|
| 0D4A | ◌̣◌̣ | MALAYALAM VOWEL SIGN O ≡ 0D46 ◌̣◌̣ 0D3E ◌̣◌̣ |
| 0D4B | ◌̣◌̣ | MALAYALAM VOWEL SIGN OO ≡ 0D47 ◌̣◌̣ 0D3E ◌̣◌̣ |
| 0D4C | ◌̣◌̣ | MALAYALAM VOWEL SIGN AU • archaic form of the /au/ dependent vowel → 0D57 ◌̣◌̣ malayalam au length mark ≡ 0D46 ◌̣◌̣ 0D57 ◌̣◌̣ |

Virama

| | | |
|------|----|--|
| 0D4D | ◌̣ | MALAYALAM SIGN VIRAMA = chandrakkala (the preferred name) = vowel half-u |
|------|----|--|

Dot reph

| | | |
|------|----|--|
| 0D4E | ◌̣ | MALAYALAM LETTER DOT REPH • not used in reformed modern Malayalam orthography |
|------|----|--|

Various signs

- 0D57 ീ MALAYALAM AU LENGTH MARK
 • used alone to write the /au/ dependent vowel in modern texts
 → 0D4C ു malayalam vowel sign au

Additional vowels for Sanskrit



- 0D60 ള MALAYALAM LETTER VOCALIC RR
 0D61 ഴ MALAYALAM LETTER VOCALIC LL

Dependent vowels

- 0D62 ു MALAYALAM VOWEL SIGN VOCALIC L
 0D63 ൂ MALAYALAM VOWEL SIGN VOCALIC LL

Reserved

For viram punctuation, use the generic Indic 0964 and 0965.

- 0D64  <reserved>
 → 0964 I devanagari danda
 0D65  <reserved>
 → 0965 II devanagari double danda

Digits

- 0D66 ൦ MALAYALAM DIGIT ZERO
 0D67 ൧ MALAYALAM DIGIT ONE
 0D68 ൨ MALAYALAM DIGIT TWO
 0D69 ൩ MALAYALAM DIGIT THREE
 0D6A ൪ MALAYALAM DIGIT FOUR
 0D6B ൫ MALAYALAM DIGIT FIVE
 0D6C ൬ MALAYALAM DIGIT SIX
 0D6D ൭ MALAYALAM DIGIT SEVEN
 0D6E ൮ MALAYALAM DIGIT EIGHT
 0D6F ൯ MALAYALAM DIGIT NINE

Malayalam numerics

- 0D70 ൧൦ MALAYALAM NUMBER TEN
 0D71 ൧൦൦ MALAYALAM NUMBER ONE HUNDRED
 0D72 ൧൦൦൦ MALAYALAM NUMBER ONE THOUSAND

Fractions

- 0D73 ൧൦൦ MALAYALAM FRACTION ONE QUARTER
 0D74 ൧൦൦൦ MALAYALAM FRACTION ONE HALF
 0D75 ൧൦൦൦൦ MALAYALAM FRACTION THREE QUARTERS

Date mark

- 0D79 ൩ MALAYALAM DATE MARK

Chillu letters

- 0D7A ണ് MALAYALAM LETTER CHILLU NN
 0D7B ണ MALAYALAM LETTER CHILLU N
 0D7C റ് MALAYALAM LETTER CHILLU RR
 • historically derived from the full letter ra
 • also used for chillu r
 0D7D ത് MALAYALAM LETTER CHILLU L
 • historically derived from the full letter ta
 • used for chillu t and chillu d
 0D7E ത് MALAYALAM LETTER CHILLU LL
 0D7F ക് MALAYALAM LETTER CHILLU K

| | 0D8 | 0D9 | 0DA | 0DB | 0DC | 0DD | 0DE | 0DF |
|---|--------------|-----------|-----------|-----------|------------|---------------|-----------|--------------|
| 0 | | ඵ 0D90 | ඵ 0DA0 | ඵ 0DB0 | ඵ 0DC0 | ෆ 0DD0 | | |
| 1 | | ඵ 0D91 | ඵ 0DA1 | ඵ 0DB1 | ඵ 0DC1 | ෆ 0DD1 | | |
| 2 | ෆ 0D82 | ඵ 0D92 | ඵ 0DA2 | | ඵ 0DC2 | ෆ 0DD2 | | ෆෆ 0DF2 |
| 3 | ෆෆ 0D83 | ඵ 0D93 | ඵ 0DA3 | ඵ 0DB3 | ඵ 0DC3 | ෆ 0DD3 | | ෆෆ 0DF3 |
| 4 | | ඵ 0D94 | ඵ 0DA4 | ඵ 0DB4 | ඵ 0DC4 | ෆ 0DD4 | | ෆෆෆෆ 0DF4 |
| 5 | ඵ 0D85 | ඵ 0D95 | ඵ 0DA5 | ඵ 0DB5 | ඵ 0DC5 | | | |
| 6 | ඵ 0D86 | ඵ 0D96 | ඵ 0DA6 | ඵ 0DB6 | ඵ 0DC6 | ෆ 0DD6 | ඵ 0DE6 | |
| 7 | ඵ 0D87 | | ඵ 0DA7 | ඵ 0DB7 | | | ඵ 0DE7 | |
| 8 | ඵ 0D88 | | ඵ 0DA8 | ඵ 0DB8 | | ෆෆ 0DD8 | ඵ 0DE8 | |
| 9 | ඵ 0D89 | | ඵ 0DA9 | ඵ 0DB9 | | ෆෆ 0DD9 | ඵ 0DE9 | |
| A | ෆෆ 0D8A | ඵ 0D9A | ඵ 0DAA | ඵ 0DBA | ෆෆ 0DCA | ෆෆ 0DDA | ඵ 0DEA | |
| B | ඵ 0D8B | ඵ 0D9B | ඵ 0DAB | ඵ 0DBB | | ෆෆෆ 0DDB | ඵ 0DEB | |
| C | ඵ 0D8C | ඵ 0D9C | ඵ 0DAC | | | ෆෆෆ 0DDC | ඵ 0DEC | |
| D | ඵෆෆ 0D8D | ඵ 0D9D | ඵ 0DAD | ඵ 0DBD | | ෆෆෆෆ 0DDD | ඵ 0DED | |
| E | ඵෆෆෆ 0D8E | ඵ 0D9E | ඵ 0DAE | | | ෆෆෆෆෆ 0DDE | ඵ 0DEE | |
| F | ඵ 0D8F | ඵ 0D9F | ඵ 0DAF | | ෆෆ 0DCF | ෆෆෆ 0DDF | ඵ 0DEF | |

Various signs

- 0D82 ◌◌ SINHALA SIGN ANUSVARAYA
= anusvara
- 0D83 ◌ඃ SINHALA SIGN VISARGAYA
= visarga

Independent vowels

- 0D85 අ SINHALA LETTER AYANNA
= sinhala letter a
- 0D86 ආ SINHALA LETTER AAYANNA
= sinhala letter aa
- 0D87 ඇ SINHALA LETTER AHEYANNA
= sinhala letter ae
- 0D88 ඈ SINHALA LETTER AEEYANNA
= sinhala letter aae
- 0D89 ඉ SINHALA LETTER IYANNA
= sinhala letter i
- 0D8A ඊ SINHALA LETTER IYANNA
= sinhala letter ii
- 0D8B උ SINHALA LETTER UYANNA
= sinhala letter u
- 0D8C ඌ SINHALA LETTER UUYANNA
= sinhala letter uu
- 0D8D ඍ SINHALA LETTER IRUYANNA
= sinhala letter vocalic r
- 0D8E ඎ SINHALA LETTER IRUUYANNA
= sinhala letter vocalic rr
- 0D8F ඔ SINHALA LETTER ILUYANNA
= sinhala letter vocalic l
- 0D90 ඕ SINHALA LETTER ILUUYANNA
= sinhala letter vocalic ll
- 0D91 එ SINHALA LETTER EYANNA
= sinhala letter e
- 0D92 ඒ SINHALA LETTER EYANNA
= sinhala letter ee
- 0D93 ඔඒ SINHALA LETTER AIYANNA
= sinhala letter ai
- 0D94 ඔ SINHALA LETTER OYANNA
= sinhala letter o
- 0D95 ඔඔ SINHALA LETTER OYANNA
= sinhala letter oo
- 0D96 ඔඔඔ SINHALA LETTER AUYANNA
= sinhala letter au

Consonants

- 0D9A ක SINHALA LETTER ALPAPRAANA KAYANNA
= sinhala letter ka
- 0D9B ඛ SINHALA LETTER MAHAAPRAANA KAYANNA
= sinhala letter kha
- 0D9C ග SINHALA LETTER ALPAPRAANA GAYANNA
= sinhala letter ga
- 0D9D ඝ SINHALA LETTER MAHAAPRAANA GAYANNA
= sinhala letter gha
- 0D9E ඞ SINHALA LETTER KANTAJA NAASIKYAYA
= sinhala letter nga
- 0D9F ඟ SINHALA LETTER SANYAKA GAYANNA
= sinhala letter nnga
- 0DA0 ච SINHALA LETTER ALPAPRAANA CAYANNA
= sinhala letter ca
- 0DA1 ඡ SINHALA LETTER MAHAAPRAANA CAYANNA
= sinhala letter cha
- 0DA2 ඣ SINHALA LETTER ALPAPRAANA JAYANNA
= sinhala letter ja
- 0DA3 ඤ SINHALA LETTER MAHAAPRAANA JAYANNA
= sinhala letter jha

- 0DA4 ඞඞ SINHALA LETTER TAALUJA NAASIKYAYA
= sinhala letter nya
- 0DA5 ඞඞඞ SINHALA LETTER TAALUJA SANYOOGA
NAASIKYAYA
= sinhala letter jnya
- 0DA6 ඣ SINHALA LETTER SANYAKA JAYANNA
= sinhala letter nyja
- 0DA7 ට SINHALA LETTER ALPAPRAANA TTAYANNA
= sinhala letter tta
- 0DA8 ඨ SINHALA LETTER MAHAAPRAANA TTAYANNA
= sinhala letter ttha
- 0DA9 ඩ SINHALA LETTER ALPAPRAANA DDAYANNA
= sinhala letter dda
- 0DAA ඨඨ SINHALA LETTER MAHAAPRAANA DDAYANNA
= sinhala letter ddha
- 0DAB ඩඞ SINHALA LETTER MUURDHAJA NAYANNA
= sinhala letter nna
- 0DAC ඩඞඞ SINHALA LETTER SANYAKA DDAYANNA
= sinhala letter ndda
- 0DAD ඞඞ SINHALA LETTER ALPAPRAANA TAYANNA
= sinhala letter ta
- 0DAE ටඞ SINHALA LETTER MAHAAPRAANA TAYANNA
= sinhala letter tha
- 0DAF ටඞඞ SINHALA LETTER ALPAPRAANA DAYANNA
= sinhala letter da
- 0DB0 ඨඞ SINHALA LETTER MAHAAPRAANA DAYANNA
= sinhala letter dha
- 0DB1 ඞඞඞ SINHALA LETTER DANTAJA NAYANNA
= sinhala letter na
- 0DB2  <reserved>
- 0DB3 ටඞඞ SINHALA LETTER SANYAKA DAYANNA
= sinhala letter nda
- 0DB4 ඣඞ SINHALA LETTER ALPAPRAANA PAYANNA
= sinhala letter pa
- 0DB5 ඣඞඞ SINHALA LETTER MAHAAPRAANA PAYANNA
= sinhala letter pha
- 0DB6 ඞඞ SINHALA LETTER ALPAPRAANA BAYANNA
= sinhala letter ba
- 0DB7 ඞඞඞ SINHALA LETTER MAHAAPRAANA BAYANNA
= sinhala letter bha
- 0DB8 ඞඞඞ SINHALA LETTER MAYANNA
= sinhala letter ma
- 0DB9 ඞඞඞ SINHALA LETTER AMBA BAYANNA
= sinhala letter mba
- 0DBA ඞඞ SINHALA LETTER YAYANNA
= sinhala letter ya
- 0DBB ඞඞඞ SINHALA LETTER RAYANNA
= sinhala letter ra
- 0DBC  <reserved>
- 0DBD ඞඞඞ SINHALA LETTER DANTAJA LAYANNA
= sinhala letter la
• dental
- 0DBE  <reserved>
- 0DBF  <reserved>
- 0DC0 ඞඞඞ SINHALA LETTER VAYANNA
= sinhala letter va
- 0DC1 ඞඞ SINHALA LETTER TAALUJA SAYANNA
= sinhala letter sha
- 0DC2 ඞඞඞ SINHALA LETTER MUURDHAJA SAYANNA
= sinhala letter ssa
• retroflex
- 0DC3 ඞඞ SINHALA LETTER DANTAJA SAYANNA
= sinhala letter sa
• dental

- 0DC4 භ SINHALA LETTER HAYANNA
= sinhala letter ha
- 0DC5 ජ SINHALA LETTER MUURDHAYA LAYANNA
= sinhala letter la
• retroflex
- 0DC6 ජ SINHALA LETTER FAYANNA
= sinhala letter fa

Sign

- 0DCA ට SINHALA SIGN AL-LAKUNA
= virama

Dependent vowel signs

- 0DCF ට SINHALA VOWEL SIGN AELA-PILLA
= sinhala vowel sign aa
- 0DD0 ට SINHALA VOWEL SIGN KETTI AEDA-PILLA
= sinhala vowel sign ae
- 0DD1 ට SINHALA VOWEL SIGN DIGA AEDA-PILLA
= sinhala vowel sign aae
- 0DD2 ට SINHALA VOWEL SIGN KETTI IS-PILLA
= sinhala vowel sign i
- 0DD3 ට SINHALA VOWEL SIGN DIGA IS-PILLA
= sinhala vowel sign ii
- 0DD4 ට SINHALA VOWEL SIGN KETTI PAA-PILLA
= sinhala vowel sign u
- 0DD5  <reserved>
- 0DD6 ට SINHALA VOWEL SIGN DIGA PAA-PILLA
= sinhala vowel sign uu
- 0DD7  <reserved>
- 0DD8 ට SINHALA VOWEL SIGN GAETTA-PILLA
= sinhala vowel sign vocalic r
- 0DD9 ට SINHALA VOWEL SIGN KOMBUVA
= sinhala vowel sign e
- 0DDA ට SINHALA VOWEL SIGN DIGA KOMBUVA
= sinhala vowel sign ee
≡ 0DD9 ට 0DCA ට
- 0DDB ට SINHALA VOWEL SIGN KOMBU DEKA
= sinhala vowel sign ai

Two-part dependent vowel signs

These vowel signs have glyph pieces which stand on both sides of the consonant; they follow the consonant in logical order, and should be handled as a unit for most processing.

- 0DDC ට SINHALA VOWEL SIGN KOMBUVA HAA AELA-PILLA
= sinhala vowel sign o
≡ 0DD9 ට 0DCF ට
- 0DDD ට SINHALA VOWEL SIGN KOMBUVA HAA DIGA AELA-PILLA
= sinhala vowel sign oo
≡ 0DDC ට 0DCA ට
- 0DDE ට SINHALA VOWEL SIGN KOMBUVA HAA GAYANUKITTA
= sinhala vowel sign au
≡ 0DD9 ට 0DDF ට

Dependent vowel sign

- 0DDF ට SINHALA VOWEL SIGN GAYANUKITTA
= sinhala vowel sign vocalic l

Astrological digits

These digits also known as Sinhala Lith Illakkam have been primarily used for writing horoscopes. This number system has a zero place holder concept unlike the Sinhala archaic numbers, Sinhala Illakkam, encoded in the 111E0-111FF range.

- | | | |
|------|---|--------------------------|
| 0DE6 | ට | SINHALA LITH DIGIT ZERO |
| 0DE7 | ට | SINHALA LITH DIGIT ONE |
| 0DE8 | ට | SINHALA LITH DIGIT TWO |
| 0DE9 | ට | SINHALA LITH DIGIT THREE |
| 0DEA | ට | SINHALA LITH DIGIT FOUR |
| 0DEB | ට | SINHALA LITH DIGIT FIVE |
| 0DEC | ට | SINHALA LITH DIGIT SIX |
| 0DED | ට | SINHALA LITH DIGIT SEVEN |
| 0DEE | ට | SINHALA LITH DIGIT EIGHT |
| 0DEF | ට | SINHALA LITH DIGIT NINE |

Additional dependent vowel signs

- 0DF2 ට SINHALA VOWEL SIGN DIGA GAETTA-PILLA
= sinhala vowel sign vocalic rr
- 0DF3 ට SINHALA VOWEL SIGN DIGA GAYANUKITTA
= sinhala vowel sign vocalic ll

Punctuation

- 0DF4  SINHALA PUNCTUATION KUNDDALIYA

| | 190 | 191 | 192 | 193 | 194 |
|---|-----------|-----------|-----------|-----------|-----------|
| 0 | 𑄀 1900 | 𑄁 1910 | 𑄂 1920 | 𑄃 1930 | 𑄄 1940 |
| 1 | 𑄅 1901 | 𑄆 1911 | 𑄇 1921 | 𑄈 1931 | |
| 2 | 𑄉 1902 | 𑄊 1912 | 𑄋 1922 | 𑄌 1932 | |
| 3 | 𑄍 1903 | 𑄎 1913 | 𑄏 1923 | 𑄐 1933 | |
| 4 | 𑄑 1904 | 𑄒 1914 | 𑄓 1924 | 𑄔 1934 | 𑄕 1944 |
| 5 | 𑄖 1905 | 𑄗 1915 | 𑄘 1925 | 𑄙 1935 | 𑄚 1945 |
| 6 | 𑄛 1906 | 𑄜 1916 | 𑄝 1926 | 𑄞 1936 | 𑄟 1946 |
| 7 | 𑄠 1907 | 𑄡 1917 | 𑄢 1927 | 𑄣 1937 | 𑄤 1947 |
| 8 | 𑄥 1908 | 𑄦 1918 | 𑄧 1928 | 𑄨 1938 | 𑄩 1948 |
| 9 | 𑄪 1909 | 𑄫 1919 | 𑄬 1929 | 𑄭 1939 | 𑄮 1949 |
| A | 𑄯 190A | 𑄰 191A | 𑄱 192A | 𑄲 193A | 𑄳 194A |
| B | 𑄴 190B | 𑄵 191B | 𑄶 192B | 𑄷 193B | 𑄸 194B |
| C | 𑄹 190C | 𑄺 191C | | | 𑄻 194C |
| D | 𑄼 190D | 𑄽 191D | | | 𑄾 194D |
| E | 𑄿 190E | 𑅀 191E | | | 𑅁 194E |
| F | 𑅂 190F | | | | 𑅃 194F |

Consonants

| | | |
|------|---|-----------------------------|
| 1900 | ᳵ | LIMBU VOWEL-CARRIER LETTER |
| 1901 | ᳆ | LIMBU LETTER KA |
| 1902 | ᳇ | LIMBU LETTER KHA |
| 1903 | ᳈ | LIMBU LETTER GA |
| 1904 | ᳉ | LIMBU LETTER GHA |
| 1905 | ᳊ | LIMBU LETTER NGA |
| 1906 | ᳋ | LIMBU LETTER CA |
| 1907 | ᳌ | LIMBU LETTER CHA |
| 1908 | ᳍ | LIMBU LETTER JA |
| 1909 | ᳎ | LIMBU LETTER JHA |
| 190A | ᳏ | LIMBU LETTER YAN |
| 190B | ᳐ | LIMBU LETTER TA |
| 190C | ᳑ | LIMBU LETTER THA |
| 190D | ᳒ | LIMBU LETTER DA |
| 190E | ᳓ | LIMBU LETTER DHA |
| 190F | ᳔ | LIMBU LETTER NA |
| 1910 | ᳕ | LIMBU LETTER PA |
| 1911 | ᳖ | LIMBU LETTER PHA |
| 1912 | ᳗ | LIMBU LETTER BA |
| 1913 | ᳘ | LIMBU LETTER BHA |
| 1914 | ᳙ | LIMBU LETTER MA |
| 1915 | ᳚ | LIMBU LETTER YA |
| 1916 | ᳛ | LIMBU LETTER RA |
| 1917 | ᳜ | LIMBU LETTER LA |
| 1918 | ᳝ | LIMBU LETTER WA |
| 1919 | ᳞ | LIMBU LETTER SHA |
| 191A | ᳟ | LIMBU LETTER SSA |
| 191B | ᳠ | LIMBU LETTER SA |
| 191C | ᳡ | LIMBU LETTER HA |
| 191D | ᳢ | LIMBU LETTER GYAN = jnya |
| 191E | ᳣ | LIMBU LETTER TRA |

Dependent vowel signs

| | | |
|------|---|---------------------|
| 1920 | ᳤ | LIMBU VOWEL SIGN A |
| 1921 | ᳥ | LIMBU VOWEL SIGN I |
| 1922 | ᳦ | LIMBU VOWEL SIGN U |
| 1923 | ᳧ | LIMBU VOWEL SIGN EE |
| 1924 | ᳨ | LIMBU VOWEL SIGN AI |
| 1925 | ᳩ | LIMBU VOWEL SIGN OO |
| 1926 | ᳪ | LIMBU VOWEL SIGN AU |
| 1927 | ᳫ | LIMBU VOWEL SIGN E |
| 1928 | ᳬ | LIMBU VOWEL SIGN O |

Subjoined consonants

| | | |
|------|---|---------------------------|
| 1929 | ᳭ | LIMBU SUBJOINED LETTER YA |
| 192A | ᳮ | LIMBU SUBJOINED LETTER RA |
| 192B | ᳯ | LIMBU SUBJOINED LETTER WA |

Final consonants

| | | |
|------|---|-----------------------------|
| 1930 | ᳰ | LIMBU SMALL LETTER KA |
| 1931 | ᳱ | LIMBU SMALL LETTER NGA |
| 1932 | ᳲ | LIMBU SMALL LETTER ANUSVARA |
| 1933 | ᳳ | LIMBU SMALL LETTER TA |
| 1934 | ᳴ | LIMBU SMALL LETTER NA |
| 1935 | ᳵ | LIMBU SMALL LETTER PA |
| 1936 | ᳶ | LIMBU SMALL LETTER MA |
| 1937 | ᳷ | LIMBU SMALL LETTER RA |
| 1938 | ᳸ | LIMBU SMALL LETTER LA |

Various signs

| | | |
|------|---|----------------------|
| 1939 | ᳹ | LIMBU SIGN MUKPHRENG |
| 193A | ᳺ | LIMBU SIGN KEMPHRENG |

| | | |
|------|---|------------------------|
| 193B | ᳻ | LIMBU SIGN SA-I |
| 193C | ᳼ | <reserved> |
| 193D | ᳽ | <reserved> |
| 193E | ᳾ | <reserved> |
| 193F | ᳿ | <reserved> |
| 1940 | ᳠ | LIMBU SIGN LOO |
| 1941 | ᳡ | <reserved> |
| 1942 | ᳢ | <reserved> |
| 1943 | ᳣ | <reserved> |
| 1944 | ᳤ | LIMBU EXCLAMATION MARK |
| 1945 | ᳥ | LIMBU QUESTION MARK |

































































Digits

| | | |
|------|---|-------------------|
| 1946 | ᳦ | LIMBU DIGIT ZERO |
| 1947 | ᳧ | LIMBU DIGIT ONE |
| 1948 | ᳨ | LIMBU DIGIT TWO |
| 1949 | ᳩ | LIMBU DIGIT THREE |
| 194A | ᳪ | LIMBU DIGIT FOUR |
| 194B | ᳫ | LIMBU DIGIT FIVE |
| 194C | ᳬ | LIMBU DIGIT SIX |
| 194D | ᳭ | LIMBU DIGIT SEVEN |
| 194E | ᳮ | LIMBU DIGIT EIGHT |
| 194F | ᳯ | LIMBU DIGIT NINE |

| | 1AB | 1AC | 1AD | 1AE | 1AF |
|---|----------|-----|-----|-----|-----|
| 0 | 1AB0 | | | | |
| 1 | 1AB1 | | | | |
| 2 | 1AB2 | | | | |
| 3 | 1AB3 | | | | |
| 4 | 1AB4 | | | | |
| 5 | 1AB5 | | | | |
| 6 | 1AB6 | | | | |
| 7 | 1AB7 | | | | |
| 8 | 1AB8 | | | | |
| 9 | 1AB9 | | | | |
| A | 1ABA | | | | |
| B | 1ABB | | | | |
| C | 1ABC | | | | |
| D | 1ABD | | | | |
| E | 1ABE | | | | |
| F | | | | | |

Used for German dialectology

| | | |
|------|------|--|
| 1AB0 | ◌̂̂ | COMBINING DOUBLED CIRCUMFLEX ACCENT |
| 1AB1 | ◌̈̈ | COMBINING DIAERESIS-RING |
| 1AB2 | ◌̈̈̈ | COMBINING INFINITY |
| 1AB3 | ◌̣ | COMBINING DOWNWARDS ARROW |
| 1AB4 | ◌̣̣̣ | COMBINING TRIPLE DOT |
| 1AB5 | ◌̥̥̥ | COMBINING X-X BELOW |
| 1AB6 | ◌̧̧̧ | COMBINING WIGGLY LINE BELOW |
| 1AB7 | ◌̨ | COMBINING OPEN MARK BELOW → 0328 ◌̨ combining ogonek → 0345 ◌̨ combining greek ypogegrammeni |
| 1AB8 | ◌̩̩̩ | COMBINING DOUBLE OPEN MARK BELOW |
| 1AB9 | ◌̪̪̪ | COMBINING LIGHT CENTRALIZATION STROKE BELOW |
| 1ABA | ◌̫̫̫ | COMBINING STRONG CENTRALIZATION STROKE BELOW |
| 1ABB | ◌̬̬̬ | COMBINING PARENTHESES ABOVE |
| 1ABC | ◌̭̭̭ | COMBINING DOUBLE PARENTHESES ABOVE |
| 1ABD | ◌̮̮̮ | COMBINING PARENTHESES BELOW |
| 1ABE | ◌̯̯̯ | COMBINING PARENTHESES OVERLAY |

| | 1DC | 1DD | 1DE | 1DF |
|---|---|---|---|---|
| 0 |  1DC0 |  1DD0 |  1DE0 |  1DF0 |
| 1 |  1DC1 |  1DD1 |  1DE1 |  1DF1 |
| 2 |  1DC2 |  1DD2 |  1DE2 |  1DF2 |
| 3 |  1DC3 |  1DD3 |  1DE3 |  1DF3 |
| 4 |  1DC4 |  1DD4 |  1DE4 |  1DF4 |
| 5 |  1DC5 |  1DD5 |  1DE5 |  |
| 6 |  1DC6 |  1DD6 |  1DE6 |  |
| 7 |  1DC7 |  1DD7 |  1DE7 |  |
| 8 |  1DC8 |  1DD8 |  1DE8 |  |
| 9 |  1DC9 |  1DD9 |  1DE9 |  |
| A |  1DCA |  1DDA |  1DEA |  |
| B |  1DCB |  1ddb |  1DEB |  |
| C |  1DCC |  1DDC |  1DEC |  1DFC |
| D |  1DCD |  1DDD |  1DED |  1DFD |
| E |  1DCE |  1DDE |  1DEE |  1DFE |
| F |  1DCF |  1DDF |  1DEF |  1DFF |

Used for Ancient Greek

These are used as editorial signs for Ancient Greek to indicate scribal deletion of erroneous accent marks.

- 1DC0 ◌̣ COMBINING DOTTED GRAVE ACCENT
→ 1FED ◌̣ greek dialytika and varia
- 1DC1 ◌̣̣ COMBINING DOTTED ACUTE ACCENT
→ 0344 ◌̣̣ combining greek dialytika tonos
→ 1FEE ◌̣̣ greek dialytika and oxia

Miscellaneous marks

- 1DC2 ◌̣̈ COMBINING SNAKE BELOW
- 1DC3 ◌̣̈ COMBINING SUSPENSION MARK
• Glagolitic
→ 0306 ◌̣̈ combining breve

Contour tone marks

- 1DC4 ◌̣̈ COMBINING MACRON-ACUTE
- 1DC5 ◌̣̈ COMBINING GRAVE-MACRON
- 1DC6 ◌̣̈ COMBINING MACRON-GRAVE
- 1DC7 ◌̣̈ COMBINING ACUTE-MACRON
- 1DC8 ◌̣̈ COMBINING GRAVE-ACUTE-GRAVE
- 1DC9 ◌̣̈ COMBINING ACUTE-GRAVE-ACUTE

Miscellaneous mark

- 1DCA ◌̣̈ COMBINING LATIN SMALL LETTER R BELOW

Contour tone marks

- 1DCB ◌̣̈ COMBINING BREVE-MACRON
• Lithuanian dialectology
- 1DCC ◌̣̈ COMBINING MACRON-BREVE
• Lithuanian dialectology

Double diacritic

- 1DCD ◌̣̈ COMBINING DOUBLE CIRCUMFLEX ABOVE

Medievalist additions

- 1DCE ◌̣̈ COMBINING OGONEK ABOVE
- 1DCF ◌̣̈ COMBINING ZIGZAG BELOW
- 1DD0 ◌̣̈ COMBINING IS BELOW
- 1DD1 ◌̣̈ COMBINING UR ABOVE
- 1DD2 ◌̣̈ COMBINING US ABOVE

Medieval superscript letter diacritics

- 1DD3 ◌̣̈ COMBINING LATIN SMALL LETTER FLATTENED OPEN A ABOVE
- 1DD4 ◌̣̈ COMBINING LATIN SMALL LETTER AE
- 1DD5 ◌̣̈ COMBINING LATIN SMALL LETTER AO
- 1DD6 ◌̣̈ COMBINING LATIN SMALL LETTER AV
- 1DD7 ◌̣̈ COMBINING LATIN SMALL LETTER C CEDILLA
- 1DD8 ◌̣̈ COMBINING LATIN SMALL LETTER INSULAR D
- 1DD9 ◌̣̈ COMBINING LATIN SMALL LETTER ETH
- 1DDA ◌̣̈ COMBINING LATIN SMALL LETTER G
- 1ddb ◌̣̈ COMBINING LATIN LETTER SMALL CAPITAL G
- 1DDC ◌̣̈ COMBINING LATIN SMALL LETTER K
- 1DDD ◌̣̈ COMBINING LATIN SMALL LETTER L
- 1DDE ◌̣̈ COMBINING LATIN LETTER SMALL CAPITAL L
- 1DDF ◌̣̈ COMBINING LATIN LETTER SMALL CAPITAL M
- 1DE0 ◌̣̈ COMBINING LATIN SMALL LETTER N
- 1DE1 ◌̣̈ COMBINING LATIN LETTER SMALL CAPITAL N
- 1DE2 ◌̣̈ COMBINING LATIN LETTER SMALL CAPITAL R
- 1DE3 ◌̣̈ COMBINING LATIN SMALL LETTER R ROTUNDA
- 1DE4 ◌̣̈ COMBINING LATIN SMALL LETTER S
- 1DE5 ◌̣̈ COMBINING LATIN SMALL LETTER LONG S
- 1DE6 ◌̣̈ COMBINING LATIN SMALL LETTER Z

Superscript letter diacritics for German dialectology

- 1DE7 ◌̣̈ COMBINING LATIN SMALL LETTER ALPHA
- 1DE8 ◌̣̈ COMBINING LATIN SMALL LETTER B
- 1DE9 ◌̣̈ COMBINING LATIN SMALL LETTER BETA
- 1DEA ◌̣̈ COMBINING LATIN SMALL LETTER SCHWA
- 1DEB ◌̣̈ COMBINING LATIN SMALL LETTER F
- 1DEC ◌̣̈ COMBINING LATIN SMALL LETTER L WITH DOUBLE MIDDLE TILDE
- 1DED ◌̣̈ COMBINING LATIN SMALL LETTER O WITH LIGHT CENTRALIZATION STROKE
- 1DEE ◌̣̈ COMBINING LATIN SMALL LETTER P
- 1DEF ◌̣̈ COMBINING LATIN SMALL LETTER ESH
- 1DF0 ◌̣̈ COMBINING LATIN SMALL LETTER U WITH LIGHT CENTRALIZATION STROKE
- 1DF1 ◌̣̈ COMBINING LATIN SMALL LETTER W
- 1DF2 ◌̣̈ COMBINING LATIN SMALL LETTER A WITH DIAERESIS
- 1DF3 ◌̣̈ COMBINING LATIN SMALL LETTER O WITH DIAERESIS
- 1DF4 ◌̣̈ COMBINING LATIN SMALL LETTER U WITH DIAERESIS

Double diacritic mark for UPA

















































































































- 1DFC ◌̣̈ COMBINING DOUBLE INVERTED BREVE BELOW

Miscellaneous mark

- 1DFD ◌̣̈ COMBINING ALMOST EQUAL TO BELOW

Additional marks for UPA

- 1DFE ◌̣̈ COMBINING LEFT ARROWHEAD ABOVE
- 1DFF ◌̣̈ COMBINING RIGHT ARROWHEAD AND DOWN ARROWHEAD BELOW

| | 219 | 21A | 21B | 21C | 21D | 21E | 21F |
|---|---|---|---|---|---|---|--|
| 0 |  2190 |  21A0 |  21B0 |  21C0 |  21D0 |  21E0 |  21F0 |
| 1 |  2191 |  21A1 |  21B1 |  21C1 |  21D1 |  21E1 |  21F1 |
| 2 |  2192 |  21A2 |  21B2 |  21C2 |  21D2 |  21E2 |  21F2 |
| 3 |  2193 |  21A3 |  21B3 |  21C3 |  21D3 |  21E3 |  21F3 |
| 4 |  2194 |  21A4 |  21B4 |  21C4 |  21D4 |  21E4 |  21F4 |
| 5 |  2195 |  21A5 |  21B5 |  21C5 |  21D5 |  21E5 |  21F5 |
| 6 |  2196 |  21A6 |  21B6 |  21C6 |  21D6 |  21E6 |  21F6 |
| 7 |  2197 |  21A7 |  21B7 |  21C7 |  21D7 |  21E7 |  21F7 |
| 8 |  2198 |  21A8 |  21B8 |  21C8 |  21D8 |  21E8 |  21F8 |
| 9 |  2199 |  21A9 |  21B9 |  21C9 |  21D9 |  21E9 |  21F9 |
| A |  219A |  21AA |  21BA |  21CA |  21DA |  21EA |  21FA |
| B |  219B |  21AB |  21BB |  21CB |  21DB |  21EB |  21FB |
| C |  219C |  21AC |  21BC |  21CC |  21DC |  21EC |  21FC |
| D |  219D |  21AD |  21BD |  21CD |  21DD |  21ED |  21FD |
| E |  219E |  21AE |  21BE |  21CE |  21DE |  21EE |  21FE |
| F |  219F |  21AF |  21BF |  21CF |  21DF |  21EF |  21FF |

Simple arrows

| | | | |
|------|---|------------------|--|
| 2190 | ← | LEFTWARDS ARROW | → 20EA ⇌ combining leftwards arrow overlay |
| 2191 | ↑ | UPWARDS ARROW | • IPA: egressive airflow |
| 2192 | → | RIGHTWARDS ARROW | = z notation total function |
| 2193 | ↓ | DOWNWARDS ARROW | • IPA: ingressive airflow |
| 2194 | ↔ | LEFT RIGHT ARROW | = z notation relation |
| 2195 | ↕ | UP DOWN ARROW | |
| 2196 | ↖ | NORTH WEST ARROW | |
| 2197 | ↗ | NORTH EAST ARROW | |
| 2198 | ↘ | SOUTH EAST ARROW | |
| 2199 | ↙ | SOUTH WEST ARROW | |

Arrows with modifications

| | | | |
|------|---|------------------------------|--|
| 219A | ↵ | LEFTWARDS ARROW WITH STROKE | • negation of 2190 ← ≡ 2190 ← 0338 ⚡ |
| 219B | ↶ | RIGHTWARDS ARROW WITH STROKE | • negation of 2192 → ≡ 2192 → 0338 ⚡ |
| 219C | ↷ | LEFTWARDS WAVE ARROW | → 2B3F ↶ wave arrow pointing directly left |
| 219D | ↸ | RIGHTWARDS WAVE ARROW | |
| 219E | ↵ | LEFTWARDS TWO HEADED ARROW | = fast cursor left |
| 219F | ↶ | UPWARDS TWO HEADED ARROW | = fast cursor up |
| 21A0 | ↷ | RIGHTWARDS TWO HEADED ARROW | = z notation total surjection = fast cursor right |
| 21A1 | ↸ | DOWNWARDS TWO HEADED ARROW | = form feed = fast cursor down |
| 21A2 | ↵ | LEFTWARDS ARROW WITH TAIL | |
| 21A3 | ↶ | RIGHTWARDS ARROW WITH TAIL | = z notation total injection |
| 21A4 | ↵ | LEFTWARDS ARROW FROM BAR | |
| 21A5 | ↶ | UPWARDS ARROW FROM BAR | |
| 21A6 | ↷ | RIGHTWARDS ARROW FROM BAR | = z notation maplet |
| 21A7 | ↸ | DOWNWARDS ARROW FROM BAR | = depth symbol |
| 21A8 | ↵ | UP DOWN ARROW WITH BASE | |
| 21A9 | ↶ | LEFTWARDS ARROW WITH HOOK | |
| 21AA | ↷ | RIGHTWARDS ARROW WITH HOOK | |
| 21AB | ↶ | LEFTWARDS ARROW WITH LOOP | |
| 21AC | ↷ | RIGHTWARDS ARROW WITH LOOP | |
| 21AD | ↷ | LEFT RIGHT WAVE ARROW | |
| 21AE | ↵ | LEFT RIGHT ARROW WITH STROKE | • negation of 2194 ↔ ≡ 2194 ↔ 0338 ⚡ |
| 21AF | ↵ | DOWNWARDS ZIGZAG ARROW | = electrolysis |

Arrows with bent tips

Other arrows with bent tips to complete this set can be found in the Miscellaneous Symbols and Arrows block.

| | | |
|------|---|------------------------------------|
| 21B0 | ↶ | UPWARDS ARROW WITH TIP LEFTWARDS |
| 21B1 | ↷ | UPWARDS ARROW WITH TIP RIGHTWARDS |
| 21B2 | ↸ | DOWNWARDS ARROW WITH TIP LEFTWARDS |

| | | |
|------|---|-------------------------------------|
| 21B3 | ↵ | DOWNWARDS ARROW WITH TIP RIGHTWARDS |
|------|---|-------------------------------------|

Keyboard symbols and circle arrows

| | | | |
|------|---|---|--|
| 21B4 | ↵ | RIGHTWARDS ARROW WITH CORNER DOWNWARDS | = line feed |
| 21B5 | ↶ | DOWNWARDS ARROW WITH CORNER LEFTWARDS | • may indicate a carriage return or new line → 23CE ↵ return symbol |
| 21B6 | ↶ | ANTICLOCKWISE TOP SEMICIRCLE ARROW | |
| 21B7 | ↷ | CLOCKWISE TOP SEMICIRCLE ARROW | |
| 21B8 | ↖ | NORTH WEST ARROW TO LONG BAR | = home |
| 21B9 | ↵ | LEFTWARDS ARROW TO BAR OVER RIGHTWARDS ARROW TO BAR | = tab with shift tab |
| 21BA | ↶ | ANTICLOCKWISE OPEN CIRCLE ARROW | |
| 21BB | ↷ | CLOCKWISE OPEN CIRCLE ARROW | |

Harpoons

| | | |
|------|---|--|
| 21BC | ↵ | LEFTWARDS HARPOON WITH BARB UPWARDS |
| 21BD | ↶ | LEFTWARDS HARPOON WITH BARB DOWNWARDS |
| 21BE | ↶ | UPWARDS HARPOON WITH BARB RIGHTWARDS |
| 21BF | ↶ | UPWARDS HARPOON WITH BARB LEFTWARDS |
| 21C0 | ↶ | RIGHTWARDS HARPOON WITH BARB UPWARDS |
| 21C1 | ↶ | RIGHTWARDS HARPOON WITH BARB DOWNWARDS |
| 21C2 | ↶ | DOWNWARDS HARPOON WITH BARB RIGHTWARDS |
| 21C3 | ↶ | DOWNWARDS HARPOON WITH BARB LEFTWARDS |

Paired arrows and harpoons

| | | |
|------|---|--|
| 21C4 | ↷ | RIGHTWARDS ARROW OVER LEFTWARDS ARROW |
| 21C5 | ↶ | UPWARDS ARROW LEFTWARDS OF DOWNWARDS ARROW |
| 21C6 | ↷ | LEFTWARDS ARROW OVER RIGHTWARDS ARROW |
| 21C7 | ↷ | LEFTWARDS PAIRED ARROWS |
| 21C8 | ↶ | UPWARDS PAIRED ARROWS |
| 21C9 | ↷ | RIGHTWARDS PAIRED ARROWS |
| 21CA | ↶ | DOWNWARDS PAIRED ARROWS |
| 21CB | ↷ | LEFTWARDS HARPOON OVER RIGHTWARDS HARPOON |
| 21CC | ↷ | RIGHTWARDS HARPOON OVER LEFTWARDS HARPOON |

Double arrows

| | | | |
|------|---|-------------------------------------|---|
| 21CD | ↷ | LEFTWARDS DOUBLE ARROW WITH STROKE | • negation of 21D0 ⇌ ≡ 21D0 ⇌ 0338 ⚡ |
| 21CE | ↷ | LEFT RIGHT DOUBLE ARROW WITH STROKE | • negation of 21D4 ⇌ ≡ 21D4 ⇌ 0338 ⚡ |
| 21CF | ↷ | RIGHTWARDS DOUBLE ARROW WITH STROKE | • negation of 21D2 ⇌ ≡ 21D2 ⇌ 0338 ⚡ |
| 21D0 | ⇌ | LEFTWARDS DOUBLE ARROW | |
| 21D1 | ↶ | UPWARDS DOUBLE ARROW | |
| 21D2 | ⇌ | RIGHTWARDS DOUBLE ARROW | |
| 21D3 | ↷ | DOWNWARDS DOUBLE ARROW | |

21D4 ⇔ LEFT RIGHT DOUBLE ARROW
 21D5 ⇕ UP DOWN DOUBLE ARROW
 21D6 ↖ NORTH WEST DOUBLE ARROW
 21D7 ↗ NORTH EAST DOUBLE ARROW
 21D8 ↘ SOUTH EAST DOUBLE ARROW
 21D9 ↙ SOUTH WEST DOUBLE ARROW

Miscellaneous arrows and keyboard symbols

21DA ⇐ LEFTWARDS TRIPLE ARROW
 21DB ⇒ RIGHTWARDS TRIPLE ARROW
 21DC ⇐ LEFTWARDS SQUIGGLE ARROW
 → 2B33 ⇐ long leftwards squiggle arrow
 21DD ⇐ RIGHTWARDS SQUIGGLE ARROW
 21DE † UPWARDS ARROW WITH DOUBLE STROKE
 = page up
 21DF ‡ DOWNWARDS ARROW WITH DOUBLE STROKE
 = page down
 21E0 ⇐ LEFTWARDS DASHED ARROW
 21E1 † UPWARDS DASHED ARROW
 21E2 ⇐ RIGHTWARDS DASHED ARROW
 21E3 ‡ DOWNWARDS DASHED ARROW
 21E4 ← LEFTWARDS ARROW TO BAR
 = leftward tab
 21E5 → RIGHTWARDS ARROW TO BAR
 = rightward tab

White arrows and keyboard symbols

21E6 ⇐ LEFTWARDS WHITE ARROW
 → 2B00 ↗ north east white arrow
 21E7 ↑ UPWARDS WHITE ARROW
 = shift
 = level 2 select (ISO 9995-7)
 21E8 ⇒ RIGHTWARDS WHITE ARROW
 = group select (ISO 9995-7)
 21E9 ↓ DOWNWARDS WHITE ARROW
 21EA ⇐ UPWARDS WHITE ARROW FROM BAR
 = caps lock
 21EB ⇐ UPWARDS WHITE ARROW ON PEDESTAL
 = level 2 lock
 21EC ⇐ UPWARDS WHITE ARROW ON PEDESTAL WITH HORIZONTAL BAR
 = capitals (caps) lock
 21ED ⇐ UPWARDS WHITE ARROW ON PEDESTAL WITH VERTICAL BAR
 = numeric lock
 21EE ⇐ UPWARDS WHITE DOUBLE ARROW
 = level 3 select
 21EF ⇐ UPWARDS WHITE DOUBLE ARROW ON PEDESTAL
 = level 3 lock
 21F0 ⇐ RIGHTWARDS WHITE ARROW FROM WALL
 = group lock
 21F1 ↖ NORTH WEST ARROW TO CORNER
 = home
 21F2 ↘ SOUTH EAST ARROW TO CORNER
 = end
 21F3 ⇕ UP DOWN WHITE ARROW
 = scrolling
 → 2B04 ⇔ left right white arrow

Miscellaneous arrows

21F4 ⇐ RIGHT ARROW WITH SMALL CIRCLE
 → 2B30 ⇐ left arrow with small circle
 21F5 † DOWNWARDS ARROW LEFTWARDS OF UPWARDS ARROW

21F6 ⇐ THREE RIGHTWARDS ARROWS
 → 2B31 ⇐ three leftwards arrows
 21F7 ⇐ LEFTWARDS ARROW WITH VERTICAL STROKE
 21F8 ⇐ RIGHTWARDS ARROW WITH VERTICAL STROKE
 = z notation partial function
 21F9 ⇐ LEFT RIGHT ARROW WITH VERTICAL STROKE
 = z notation partial relation
 21FA ⇐ LEFTWARDS ARROW WITH DOUBLE VERTICAL STROKE
 21FB ⇐ RIGHTWARDS ARROW WITH DOUBLE VERTICAL STROKE
 = z notation finite function
 21FC ⇐ LEFT RIGHT ARROW WITH DOUBLE VERTICAL STROKE
 = z notation finite relation
 21FD ← LEFTWARDS OPEN-HEADED ARROW
 21FE → RIGHTWARDS OPEN-HEADED ARROW
 21FF ⇐ LEFT RIGHT OPEN-HEADED ARROW

| | 230 | 231 | 232 | 233 | 234 | 235 | 236 | 237 | 238 | 239 | 23A | 23B | 23C | 23D | 23E | 23F |
|---|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 0 | 2300 | 2310 | 2320 | 2330 | 2340 | 2350 | 2360 | 2370 | 2380 | 2390 | 23A0 | 23B0 | 23C0 | 23D0 | 23E0 | 23F0 |
| 1 | 2301 | 2311 | 2321 | 2331 | 2341 | 2351 | 2361 | 2371 | 2381 | 2391 | 23A1 | 23B1 | 23C1 | 23D1 | 23E1 | 23F1 |
| 2 | 2302 | 2312 | 2322 | 2332 | 2342 | 2352 | 2362 | 2372 | 2382 | 2392 | 23A2 | 23B2 | 23C2 | 23D2 | 23E2 | 23F2 |
| 3 | 2303 | 2313 | 2323 | 2333 | 2343 | 2353 | 2363 | 2373 | 2383 | 2393 | 23A3 | 23B3 | 23C3 | 23D3 | 23E3 | 23F3 |
| 4 | 2304 | 2314 | 2324 | 2334 | 2344 | 2354 | 2364 | 2374 | 2384 | 2394 | 23A4 | 23B4 | 23C4 | 23D4 | 23E4 | 23F4 |
| 5 | 2305 | 2315 | 2325 | 2335 | 2345 | 2355 | 2365 | 2375 | 2385 | 2395 | 23A5 | 23B5 | 23C5 | 23D5 | 23E5 | 23F5 |
| 6 | 2306 | 2316 | 2326 | 2336 | 2346 | 2356 | 2366 | 2376 | 2386 | 2396 | 23A6 | 23B6 | 23C6 | 23D6 | 23E6 | 23F6 |
| 7 | 2307 | 2317 | 2327 | 2337 | 2347 | 2357 | 2367 | 2377 | 2387 | 2397 | 23A7 | 23B7 | 23C7 | 23D7 | 23E7 | 23F7 |
| 8 | 2308 | 2318 | 2328 | 2338 | 2348 | 2358 | 2368 | 2378 | 2388 | 2398 | 23A8 | 23B8 | 23C8 | 23D8 | 23E8 | 23F8 |
| 9 | 2309 | 2319 | 2329 | 2339 | 2349 | 2359 | 2369 | 2379 | 2389 | 2399 | 23A9 | 23B9 | 23C9 | 23D9 | 23E9 | 23F9 |
| A | 230A | 231A | 232A | 233A | 234A | 235A | 236A | 237A | 238A | 239A | 23AA | 23BA | 23CA | 23DA | 23EA | 23FA |
| B | 230B | 231B | 232B | 233B | 234B | 235B | 236B | 237B | 238B | 239B | 23AB | 23BB | 23CB | 23DB | 23EB | 23FB |
| C | 230C | 231C | 232C | 233C | 234C | 235C | 236C | 237C | 238C | 239C | 23AC | 23BC | 23CC | 23DC | 23EC | 23FC |
| D | 230D | 231D | 232D | 233D | 234D | 235D | 236D | 237D | 238D | 239D | 23AD | 23BD | 23CD | 23DD | 23ED | 23FD |
| E | 230E | 231E | 232E | 233E | 234E | 235E | 236E | 237E | 238E | 239E | 23AE | 23BE | 23CE | 23DE | 23EE | 23FE |
| F | 230F | 231F | 232F | 233F | 234F | 235F | 236F | 237F | 238F | 239F | 23AF | 23BF | 23CF | 23DF | 23EF | 23FF |

Miscellaneous technical

- 2300 ∅ DIAMETER SIGN
→ 2205 ∅ empty set
- 2301 ↘ ELECTRIC ARROW
• from ISO 2047
• symbol for End of Transmission
- 2302 ☰ HOUSE
- 2303 ^ UP ARROWHEAD
→ 005E ^ circumflex accent
→ 02C4 ^ modifier letter up arrowhead
→ 2038 ^ caret
→ 2227 ^ logical and
- 2304 v DOWN ARROWHEAD
→ 02C5 v modifier letter down arrowhead
→ 2228 v logical or
→ 2335 v countersink
- 2305 ⊘ PROJECTIVE
→ 22BC ⊘ nand
- 2306 ≙ PERSPECTIVE
- 2307 ~ WAVY LINE
→ 3030 ~ wavy dash

Ceilings and floors

These characters are tall and narrow mathematical delimiters, in contrast to the quine corners or half brackets. They are also distinct from CJK corner brackets, which are wide quotation marks.

- 2308 ⌈ LEFT CEILING
= APL upstile
→ 2E22 ⌈ top left half bracket
→ 300C ⌈ left corner bracket
- 2309 ⌋ RIGHT CEILING
→ 20E7 ⌋ combining annuity symbol
→ 2E23 ⌋ top right half bracket
- 230A ⌌ LEFT FLOOR
= APL downstile
→ 2E24 ⌌ bottom left half bracket
- 230B ⌋ RIGHT FLOOR
→ 300D ⌋ right corner bracket
→ 2E25 ⌋ bottom right half bracket

Crops

- 230C ⌞ BOTTOM RIGHT CROP
• set of four “crop” corners, arranged facing outward
- 230D ⌟ BOTTOM LEFT CROP
- 230E ⌠ TOP RIGHT CROP
- 230F ⌡ TOP LEFT CROP

Miscellaneous technical

- 2310 ⇐ REVERSED NOT SIGN
= beginning of line
→ 00AC ⇐ not sign
- 2311 ◻ SQUARE LOZENGE
= Kissen (pillow)
• used as a command delimiter in some very old computers
- 2312 ⤴ ARC
= position of any line
→ 25E0 ⤴ upper half circle
- 2313 ⤵ SEGMENT
= position of a surface
- 2314 ⤶ SECTOR
- 2315 ⓞ TELEPHONE RECORDER

- 2316 ⊕ POSITION INDICATOR
= true position
- 2317 ≡ VIEWDATA SQUARE
→ 22D5 ≡ equal and parallel to
- 2318 ⌘ PLACE OF INTEREST SIGN
= command key (1.0)
= operating system key (ISO 9995-7)
- 2319 ⊣ TURNED NOT SIGN
= line marker

User interface symbols

- 231A ⌚ WATCH
→ 23F0 ⌚ alarm clock
→ 1F550 ⌚ clock face one o'clock
- 231B ⌚ HOURGLASS
= alchemical symbol for hour

Quine corners

These form a set of four quine corners, for quincuncial arrangement. They are also used in upper and lower pairs in mathematics, or more rarely in editorial usage as alternatives to half brackets.

- 231C ⌜ TOP LEFT CORNER
→ 2E00 ⌜ right angle substitution marker
→ 2E22 ⌜ top left half bracket
- 231D ⌝ TOP RIGHT CORNER
- 231E ⌞ BOTTOM LEFT CORNER
- 231F ⌟ BOTTOM RIGHT CORNER

Integral pieces

- 2320 ∫ TOP HALF INTEGRAL
→ 23AE ∫ integral extension
- 2321 ∫ BOTTOM HALF INTEGRAL

Frown and smile

- 2322 ☹ FROWN
→ 2040 ☹ character tie
- 2323 ☺ SMILE
→ 203F ☺ undertie

Keyboard symbols

- 2324 ⌨ UP ARROWHEAD BETWEEN TWO HORIZONTAL BARS
= enter key
- 2325 ⌘ OPTION KEY
- 2326 ☒ ERASE TO THE RIGHT
= delete to the right key
- 2327 ☒ X IN A RECTANGLE BOX
= clear key
- 2328 ⌨ KEYBOARD

Deprecated angle brackets

These characters are deprecated and are strongly discouraged for mathematical use because of their canonical equivalence to CJK punctuation.

- 2329 < LEFT-POINTING ANGLE BRACKET
→ 003C < less-than sign
→ 2039 < single left-pointing angle quotation mark
→ 27E8 < mathematical left angle bracket
≡ 3008 < left angle bracket

- 232A } RIGHT-POINTING ANGLE BRACKET
 → 003E > greater-than sign
 → 203A > single right-pointing angle quotation mark
 → 27E9 } mathematical right angle bracket
 ≡ 3009 } right angle bracket

Keyboard symbol

- 232B ☒ ERASE TO THE LEFT
 = delete to the left key

Chemistry symbol

- 232C ⬡ BENZENE RING

Drafting symbols

- 232D ⚫ CYLINDRICITY
 232E ⚫ ALL AROUND-PROFILE
 232F + SYMMETRY
 2330 ∟ TOTAL RUNOUT
 2331 ϕ DIMENSION ORIGIN
 2332 ▽ CONICAL TAPER
 2333 ▽ SLOPE
 → 25FA ▽ lower left triangle
 2334 □ COUNTERBORE
 → 2423 □ open box
 2335 √ COUNTERSINK
 → 2304 √ down arrowhead

APL

- 2336 ⊥ APL FUNCTIONAL SYMBOL I-BEAM
 2337 ⊥ APL FUNCTIONAL SYMBOL SQUISH QUAD
 → 2395 □ apl functional symbol quad
 → 25AF □ white vertical rectangle
 → 2AFF ⊥ n-ary white vertical bar
 2338 ⊥ APL FUNCTIONAL SYMBOL QUAD EQUAL
 2339 ⊥ APL FUNCTIONAL SYMBOL QUAD DIVIDE
 233A ⊥ APL FUNCTIONAL SYMBOL QUAD DIAMOND
 → 26CB ⊥ white diamond in square
 233B ⊥ APL FUNCTIONAL SYMBOL QUAD JOT
 → 29C7 ⊥ squared small circle
 233C ⊥ APL FUNCTIONAL SYMBOL QUAD CIRCLE
 233D ⊥ APL FUNCTIONAL SYMBOL CIRCLE STILE
 233E ⊥ APL FUNCTIONAL SYMBOL CIRCLE JOT
 → 229A ⊥ circled ring operator
 → 29BE ⊥ circled white bullet
 233F / APL FUNCTIONAL SYMBOL SLASH BAR
 → 1019A / roman as sign
 2340 \ APL FUNCTIONAL SYMBOL BACKSLASH BAR
 → 29F7 \ reverse solidus with horizontal stroke
 2341 / APL FUNCTIONAL SYMBOL QUAD SLASH
 → 29C4 / squared rising diagonal slash
 2342 \ APL FUNCTIONAL SYMBOL QUAD BACKSLASH
 → 29C5 \ squared falling diagonal slash
 2343 / APL FUNCTIONAL SYMBOL QUAD LESS-THAN
 2344 \ APL FUNCTIONAL SYMBOL QUAD GREATER-THAN
 2345 + APL FUNCTIONAL SYMBOL LEFTWARDS VANE
 2346 + APL FUNCTIONAL SYMBOL RIGHTWARDS VANE
 2347 ⊥ APL FUNCTIONAL SYMBOL QUAD LEFTWARDS ARROW
 2348 ⊥ APL FUNCTIONAL SYMBOL QUAD RIGHTWARDS ARROW
 2349 ⊥ APL FUNCTIONAL SYMBOL CIRCLE BACKSLASH
 → 29B0 ⊥ reversed empty set

- 234A ⊥ APL FUNCTIONAL SYMBOL DOWN TACK UNDERBAR
 = up tack underbar
 • preferred naming for APL tack symbols now follows the London Convention in ISO/IEC 13751:2000 (APL Extended)
 → 22A5 ⊥ up tack
 234B Δ APL FUNCTIONAL SYMBOL DELTA STILE
 234C ⊥ APL FUNCTIONAL SYMBOL QUAD DOWN CARET
 234D ⊥ APL FUNCTIONAL SYMBOL QUAD DELTA
 234E ⊥ APL FUNCTIONAL SYMBOL DOWN TACK JOT
 = up tack jot
 → 22A5 ⊥ up tack
 234F + APL FUNCTIONAL SYMBOL UPWARDS VANE
 2350 ⊥ APL FUNCTIONAL SYMBOL QUAD UPWARDS ARROW
 2351 ⊥ APL FUNCTIONAL SYMBOL UP TACK OVERBAR
 = down tack overbar
 → 22A4 ⊥ down tack
 → 3012 ⊥ postal mark
 2352 ∇ APL FUNCTIONAL SYMBOL DEL STILE
 2353 ⊥ APL FUNCTIONAL SYMBOL QUAD UP CARET
 2354 ⊥ APL FUNCTIONAL SYMBOL QUAD DEL
 2355 ⊥ APL FUNCTIONAL SYMBOL UP TACK JOT
 = down tack jot
 → 22A4 ⊥ down tack
 2356 + APL FUNCTIONAL SYMBOL DOWNWARDS VANE
 2357 ⊥ APL FUNCTIONAL SYMBOL QUAD DOWNWARDS ARROW
 2358 ' APL FUNCTIONAL SYMBOL QUOTE UNDERBAR
 2359 Δ APL FUNCTIONAL SYMBOL DELTA UNDERBAR
 235A ⊥ APL FUNCTIONAL SYMBOL DIAMOND UNDERBAR
 235B ⊥ APL FUNCTIONAL SYMBOL JOT UNDERBAR
 235C ⊥ APL FUNCTIONAL SYMBOL CIRCLE UNDERBAR
 235D ⊥ APL FUNCTIONAL SYMBOL UP SHOE JOT
 → 2A40 ⊥ intersection with dot
 235E ⊥ APL FUNCTIONAL SYMBOL QUOTE QUAD
 235F ⊥ APL FUNCTIONAL SYMBOL CIRCLE STAR
 → 229B ⊥ circled asterisk operator
 2360 ⊥ APL FUNCTIONAL SYMBOL QUAD COLON
 2361 ⊥ APL FUNCTIONAL SYMBOL UP TACK DIAERESIS
 = down tack diaeresis
 → 22A4 ⊥ down tack
 2362 ∇ APL FUNCTIONAL SYMBOL DEL DIAERESIS
 2363 * APL FUNCTIONAL SYMBOL STAR DIAERESIS
 2364 ø APL FUNCTIONAL SYMBOL JOT DIAERESIS
 = hoot
 2365 Ö APL FUNCTIONAL SYMBOL CIRCLE DIAERESIS
 = holler
 2366 ∇ APL FUNCTIONAL SYMBOL DOWN SHOE STILE
 2367 ⊥ APL FUNCTIONAL SYMBOL LEFT SHOE STILE
 2368 ∼ APL FUNCTIONAL SYMBOL TILDE DIAERESIS
 = smirk
 2369 > APL FUNCTIONAL SYMBOL GREATER-THAN DIAERESIS
 236A , APL FUNCTIONAL SYMBOL COMMA BAR
 236B ∇ APL FUNCTIONAL SYMBOL DEL TILDE
 236C θ APL FUNCTIONAL SYMBOL ZILDE
 236D + APL FUNCTIONAL SYMBOL STILE TILDE
 236E ; APL FUNCTIONAL SYMBOL SEMICOLON UNDERBAR

| | | |
|------|---|--|
| 236F | ⊞ | APL FUNCTIONAL SYMBOL QUAD NOT EQUAL |
| 2370 | ⊟ | APL FUNCTIONAL SYMBOL QUAD QUESTION |
| 2371 | ∨ | APL FUNCTIONAL SYMBOL DOWN CARET TILDE |
| 2372 | ⋈ | APL FUNCTIONAL SYMBOL UP CARET TILDE |
| 2373 | ι | APL FUNCTIONAL SYMBOL IOTA |
| 2374 | ρ | APL FUNCTIONAL SYMBOL RHO |
| 2375 | ω | APL FUNCTIONAL SYMBOL OMEGA |
| 2376 | ⍡ | APL FUNCTIONAL SYMBOL ALPHA UNDERBAR |
| 2377 | ⍢ | APL FUNCTIONAL SYMBOL EPSILON UNDERBAR |
| 2378 | ⍣ | APL FUNCTIONAL SYMBOL IOTA UNDERBAR |
| 2379 | ⍤ | APL FUNCTIONAL SYMBOL OMEGA UNDERBAR |
| 237A | α | APL FUNCTIONAL SYMBOL ALPHA |

Graphics for control codes

| | | |
|------|---|-----------------------------------|
| 237B | ✓ | NOT CHECK MARK |
| | | • from ISO 2047 |
| | | • symbol for Negative Acknowledge |

Miscellaneous technical

| | | |
|------|---|---|
| 237C | ⌵ | RIGHT ANGLE WITH DOWNWARDS ZIGZAG ARROW |
|------|---|---|

Graphics for control codes

| | | |
|------|---|--------------------------------------|
| 237D | ⌵ | SHOULDERED OPEN BOX |
| | | • from ISO 9995-7 |
| | | • keyboard symbol for No Break Space |
| | | → 2423 ⌵ open box |
| 237E | ⌶ | BELL SYMBOL |
| | | • from ISO 2047 |
| 237F | ⋮ | VERTICAL LINE WITH MIDDLE DOT |
| | | • from ISO 2047 |
| | | • symbol for End of Medium |

Keyboard symbols from ISO 9995-7

| | | |
|------|---|--|
| 2380 | ↵ | INSERTION SYMBOL |
| 2381 | ⌵ | CONTINUOUS UNDERLINE SYMBOL |
| 2382 | ⌵ | DISCONTINUOUS UNDERLINE SYMBOL |
| 2383 | ≡ | EMPHASIS SYMBOL |
| 2384 | ⌵ | COMPOSITION SYMBOL |
| 2385 | ⌵ | WHITE SQUARE WITH CENTRE VERTICAL LINE |
| | | = center |
| 2386 | ⌵ | ENTER SYMBOL |
| 2387 | ⌵ | ALTERNATIVE KEY SYMBOL |
| 2388 | ⌵ | HELM SYMBOL |
| | | = control |
| | | → 2638 ⌵ wheel of dharma |
| 2389 | ⌵ | CIRCLED HORIZONTAL BAR WITH NOTCH |
| | | = pause |
| 238A | ⌵ | CIRCLED TRIANGLE DOWN |
| | | = interrupt, break |
| 238B | ⌵ | BROKEN CIRCLE WITH NORTHWEST ARROW |
| | | = escape |
| 238C | ⌵ | UNDO SYMBOL |

Electrotechnical symbols from IR 181

| | | |
|------|---|-----------------------------------|
| 238D | ⌵ | MONOSTABLE SYMBOL |
| 238E | ⌵ | HYSTERESIS SYMBOL |
| 238F | ⌵ | OPEN-CIRCUIT-OUTPUT H-TYPE SYMBOL |
| 2390 | ⌵ | OPEN-CIRCUIT-OUTPUT L-TYPE SYMBOL |
| 2391 | ⌵ | PASSIVE-PULL-DOWN-OUTPUT SYMBOL |
| 2392 | ⌵ | PASSIVE-PULL-UP-OUTPUT SYMBOL |
| 2393 | ⌵ | DIRECT CURRENT SYMBOL FORM TWO |
| 2394 | ⌵ | SOFTWARE-FUNCTION SYMBOL |

APL

| | | |
|------|---|--|
| 2395 | ⌵ | APL FUNCTIONAL SYMBOL QUAD |
| | | → 2337 ⌵ apl functional symbol squish quad |
| | | → 25AF ⌵ white vertical rectangle |

Keyboard symbols from ISO 9995-7

| | | |
|------|---|---|
| 2396 | ⌵ | DECIMAL SEPARATOR KEY SYMBOL |
| 2397 | ⌵ | PREVIOUS PAGE |
| | | → 1F519 ⌵ back with leftwards arrow above |
| 2398 | ⌵ | NEXT PAGE |
| 2399 | ⌵ | PRINT SCREEN SYMBOL |
| 239A | ⌵ | CLEAR SCREEN SYMBOL |
| | | → 20E2 ⌵ combining enclosing screen |

Bracket pieces

| | | |
|------|-----------------------------------|-----------------------------------|
| 239B | } | LEFT PARENTHESIS UPPER HOOK |
| 239C | | LEFT PARENTHESIS EXTENSION |
| 239D | | LEFT PARENTHESIS LOWER HOOK |
| 239E | | RIGHT PARENTHESIS UPPER HOOK |
| 239F | | RIGHT PARENTHESIS EXTENSION |
| 23A0 | | RIGHT PARENTHESIS LOWER HOOK |
| 23A1 | | LEFT SQUARE BRACKET UPPER CORNER |
| 23A2 | | LEFT SQUARE BRACKET EXTENSION |
| 23A3 | | LEFT SQUARE BRACKET LOWER CORNER |
| 23A4 | | RIGHT SQUARE BRACKET UPPER CORNER |
| 23A5 | RIGHT SQUARE BRACKET EXTENSION | |
| 23A6 | RIGHT SQUARE BRACKET LOWER CORNER | |
| 23A7 | } | LEFT CURLY BRACKET UPPER HOOK |
| 23A8 | | LEFT CURLY BRACKET MIDDLE PIECE |
| 23A9 | | LEFT CURLY BRACKET LOWER HOOK |
| 23AA | } | CURLY BRACKET EXTENSION |
| 23AB | | RIGHT CURLY BRACKET UPPER HOOK |
| 23AC | } | RIGHT CURLY BRACKET MIDDLE PIECE |
| 23AD | | RIGHT CURLY BRACKET LOWER HOOK |

Special character extensions

| | | |
|------|---|------------------------------------|
| 23AE | | INTEGRAL EXTENSION |
| | | → 2320 \int top half integral |
| | | → 2321 \int bottom half integral |
| 23AF | — | HORIZONTAL LINE EXTENSION |
| | | • used for extension of arrows |
| | | → 23D0 vertical line extension |

Bracket pieces

| | | |
|------|--|---|
| 23B0 | | UPPER LEFT OR LOWER RIGHT CURLY BRACKET SECTION |
| | | = left moustache |
| 23B1 | | UPPER RIGHT OR LOWER LEFT CURLY BRACKET SECTION |
| | | = right moustache |


Summation sign parts

| | | |
|------|---|--------------------------|
| 23B2 | ∑ | SUMMATION TOP |
| 23B3 | ∑ | SUMMATION BOTTOM |
| | | → 2211 ∑ n-ary summation |




Horizontal brackets

These characters are also used as delimiters of vertical text in non-CJK terminal emulation.

| | | |
|------|---|--|
| 23B4 | ⌵ | TOP SQUARE BRACKET |
| | | → FE47 ⌵ presentation form for vertical left square bracket |
| 23B5 | ⌵ | BOTTOM SQUARE BRACKET |
| | | → FE48 ⌵ presentation form for vertical right square bracket |





23B6  BOTTOM SQUARE BRACKET OVER TOP SQUARE BRACKET
 • only used for terminal emulation

Terminal graphic characters
























23B7  RADICAL SYMBOL BOTTOM
 23B8  LEFT VERTICAL BOX LINE
 23B9  RIGHT VERTICAL BOX LINE

Scan lines for terminal graphics


The scan line numbers here refer to old, low-resolution technology for terminals, with only 9 scan lines per fixed-size character glyph. Even-numbered scan lines are unified with box-drawing graphics.

23BA  HORIZONTAL SCAN LINE-1
 23BB  HORIZONTAL SCAN LINE-3
 23BC  HORIZONTAL SCAN LINE-7
 23BD  HORIZONTAL SCAN LINE-9




Dentistry notation symbols

23BE  DENTISTRY SYMBOL LIGHT VERTICAL AND TOP RIGHT
 → 2308 
 23BF  DENTISTRY SYMBOL LIGHT VERTICAL AND BOTTOM RIGHT
 → 230A 
 23C0  DENTISTRY SYMBOL LIGHT VERTICAL WITH CIRCLE
 23C1  DENTISTRY SYMBOL LIGHT DOWN AND HORIZONTAL WITH CIRCLE
 23C2  DENTISTRY SYMBOL LIGHT UP AND HORIZONTAL WITH CIRCLE
 23C3  DENTISTRY SYMBOL LIGHT VERTICAL WITH TRIANGLE
 23C4  DENTISTRY SYMBOL LIGHT DOWN AND HORIZONTAL WITH TRIANGLE
 23C5  DENTISTRY SYMBOL LIGHT UP AND HORIZONTAL WITH TRIANGLE
 23C6  DENTISTRY SYMBOL LIGHT VERTICAL AND WAVE
 23C7  DENTISTRY SYMBOL LIGHT DOWN AND HORIZONTAL WITH WAVE
 23C8  DENTISTRY SYMBOL LIGHT UP AND HORIZONTAL WITH WAVE
 23C9  DENTISTRY SYMBOL LIGHT DOWN AND HORIZONTAL
 → 22A4 
 → 252C 
 23CA  DENTISTRY SYMBOL LIGHT UP AND HORIZONTAL
 → 22A5 
 → 2534 
 23CB  DENTISTRY SYMBOL LIGHT VERTICAL AND TOP LEFT
 → 2309 
 23CC  DENTISTRY SYMBOL LIGHT VERTICAL AND BOTTOM LEFT
 → 230B 



Miscellaneous technical

23CD  SQUARE FOOT













Keyboard and UI symbols

23CE  RETURN SYMBOL
 • may be shown with either hollow or filled glyph
 → 21B5 
 23CF  EJECT SYMBOL
 • UI symbol to eject media

Special character extension

23D0  VERTICAL LINE EXTENSION
 • used for extension of arrows
 → 23AF 

Metrical symbols













23D1  METRICAL BREVE
 23D2  METRICAL LONG OVER SHORT
 23D3  METRICAL SHORT OVER LONG
 23D4  METRICAL LONG OVER TWO SHORTS
 23D5  METRICAL TWO SHORTS OVER LONG
 23D6  METRICAL TWO SHORTS JOINED
 23D7  METRICAL TRISEME
 → 1D242 
 23D8  METRICAL TETRASEME
 → 1D243 
 23D9  METRICAL PENTASEME
 → 1D244 

Electrotechnical symbols

23DA  EARTH GROUND
 23DB  FUSE

Horizontal brackets

These are intended for bracketing terms of mathematical expressions where their glyph extends to accommodate the width of the bracketed expression

23DC  TOP PARENTHESIS
 → FE35 
 23DD  BOTTOM PARENTHESIS
 → FE36 
 23DE  TOP CURLY BRACKET
 → FE37 
 23DF  BOTTOM CURLY BRACKET
 → FE38 
 23E0  TOP TORTOISE SHELL BRACKET
 → FE39 
 23E1  BOTTOM TORTOISE SHELL BRACKET
 → FE3A 



Miscellaneous technical


23E2  WHITE TRAPEZIUM

Chemistry symbol





























23E3  BENZENE RING WITH CIRCLE

































































































































































































Miscellaneous technical

23E4  STRAIGHTNESS
 23E5  FLATNESS
 23E6  AC CURRENT
 23E7  ELECTRICAL INTERSECTION

- 23E8  DECIMAL EXPONENT SYMBOL
 • Algol-60 token for scientific notation literals

User interface symbols

- 23E9  BLACK RIGHT-POINTING DOUBLE TRIANGLE
 = fast forward
- 23EA  BLACK LEFT-POINTING DOUBLE TRIANGLE
 = fast rewind
- 23EB  BLACK UP-POINTING DOUBLE TRIANGLE
- 23EC  BLACK DOWN-POINTING DOUBLE TRIANGLE
- 23ED  BLACK RIGHT-POINTING DOUBLE TRIANGLE WITH VERTICAL BAR
- 23EE  BLACK LEFT-POINTING DOUBLE TRIANGLE WITH VERTICAL BAR
- 23EF  BLACK RIGHT-POINTING TRIANGLE WITH DOUBLE VERTICAL BAR
- 23F0  ALARM CLOCK
 → 231A  watch
 → 1F550  clock face one o'clock
- 23F1  STOPWATCH
- 23F2  TIMER CLOCK
- 23F3  HOURGLASS WITH FLOWING SAND
 → 231B  hourglass
- 23F4  BLACK MEDIUM LEFT-POINTING TRIANGLE
 = reverse, back
 • preferred to 25C0  black left-pointing triangle
- 23F5  BLACK MEDIUM RIGHT-POINTING TRIANGLE
 = forward
 • preferred to 25B6  black right-pointing triangle
- 23F6  BLACK MEDIUM UP-POINTING TRIANGLE
 = increase
 • preferred to 25B2  black up-pointing triangle
- 23F7  BLACK MEDIUM DOWN-POINTING TRIANGLE
 = decrease
 • preferred to 25BC  black down-pointing triangle
- 23F8  DOUBLE VERTICAL BAR
 = pause
 → 2016  double vertical line
- 23F9  BLACK SQUARE FOR STOP
 = stop
 → 25FC  black medium square
- 23FA  BLACK CIRCLE FOR RECORD
 = record
 → 26AB  medium black circle

| | 270 | 271 | 272 | 273 | 274 | 275 | 276 | 277 | 278 | 279 | 27A | 27B |
|---|--|--|--|--|--|--|--|---|--|--|--|--|
| 0 |  2700 |  2710 |  2720 |  2730 |  2740 |  2750 |  2760 |  2770 |  2780 |  2790 |  27A0 |  27B0 |
| 1 |  2701 |  2711 |  2721 |  2731 |  2741 |  2751 |  2761 |  2771 |  2781 |  2791 |  27A1 |  27B1 |
| 2 |  2702 |  2712 |  2722 |  2732 |  2742 |  2752 |  2762 |  2772 |  2782 |  2792 |  27A2 |  27B2 |
| 3 |  2703 |  2713 |  2723 |  2733 |  2743 |  2753 |  2763 |  2773 |  2783 |  2793 |  27A3 |  27B3 |
| 4 |  2704 |  2714 |  2724 |  2734 |  2744 |  2754 |  2764 |  2774 |  2784 |  2794 |  27A4 |  27B4 |
| 5 |  2705 |  2715 |  2725 |  2735 |  2745 |  2755 |  2765 |  2775 |  2785 |  2795 |  27A5 |  27B5 |
| 6 |  2706 |  2716 |  2726 |  2736 |  2746 |  2756 |  2766 |  2776 |  2786 |  2796 |  27A6 |  27B6 |
| 7 |  2707 |  2717 |  2727 |  2737 |  2747 |  2757 |  2767 |  2777 |  2787 |  2797 |  27A7 |  27B7 |
| 8 |  2708 |  2718 |  2728 |  2738 |  2748 |  2758 |  2768 |  2778 |  2788 |  2798 |  27A8 |  27B8 |
| 9 |  2709 |  2719 |  2729 |  2739 |  2749 |  2759 |  2769 |  2779 |  2789 |  2799 |  27A9 |  27B9 |
| A |  270A |  271A |  272A |  273A |  274A |  275A |  276A |  277A |  278A |  279A |  27AA |  27BA |
| B |  270B |  271B |  272B |  273B |  274B |  275B |  276B |  277B |  278B |  279B |  27AB |  27BB |
| C |  270C |  271C |  272C |  273C |  274C |  275C |  276C |  277C |  278C |  279C |  27AC |  27BC |
| D |  270D |  271D |  272D |  273D |  274D |  275D |  276D |  277D |  278D |  279D |  27AD |  27BD |
| E |  270E |  271E |  272E |  273E |  274E |  275E |  276E |  277E |  278E |  279E |  27AE |  27BE |
| F |  270F |  271F |  272F |  273F |  274F |  275F |  276F |  277F |  278F |  279F |  27AF |  27BF |

ITC Zapf dingbats series 100. Some of the ITC Zapf dingbats have been unified with geometric shape characters. Gaps in the chart have subsequently been filled with other dingbat-like symbols.

- 260E ☎ black telephone
- 261B ➡ black right pointing index
- 261E ⬜ white right pointing index
- 2605 ★ black star
- 25CF ● black circle
- 25A0 ■ black square
- 25B2 ▲ black up-pointing triangle
- 25BC ▼ black down-pointing triangle
- 25C6 ◆ black diamond
- 2192 → rightwards arrow
- 2194 ↔ left right arrow
- 2195 ↓ up down arrow

Miscellaneous

- 2700 ✂ **BLACK SAFETY SCISSORS**
• forms a pair with 2704 ✂ white scissors
- 2701 ✂ UPPER BLADE SCISSORS
- 2702 ✂ BLACK SCISSORS
- 2703 ✂ LOWER BLADE SCISSORS
- 2704 ✂ WHITE SCISSORS
- 2705 ✓ WHITE HEAVY CHECK MARK
→ 2714 ✓ heavy check mark
- 2706 ☎ TELEPHONE LOCATION SIGN
→ 2121 TEL telephone sign
→ 1F4DE 📞 telephone receiver
- 2707 📀 TAPE DRIVE
- 2708 ✈ AIRPLANE
- 2709 ✉ ENVELOPE
→ 1F4E8 📧 incoming envelope
- 270A 🖐 RAISED FIST
= rock in Rock, Paper, Scissors game
→ 1F44A 🖐 fisted hand sign
- 270B 🖐 RAISED HAND
= paper in Rock, Paper, Scissors game
→ 1F44B 🖐 waving hand sign
- 270C ✂ VICTORY HAND
= scissors in Rock, Paper, Scissors game
- 270D 🖊 WRITING HAND
- 270E 🖊 LOWER RIGHT PENCIL
- 270F 🖊 PENCIL
- 2710 🖊 UPPER RIGHT PENCIL
- 2711 🖊 WHITE NIB
- 2712 🖊 BLACK NIB
- 2713 ✓ CHECK MARK
→ 221A ✓ square root
- 2714 ✓ HEAVY CHECK MARK
- 2715 ✖ MULTIPLICATION X
→ 00D7 ✖ multiplication sign
→ 2573 ✖ box drawings light diagonal cross
- 2716 ✖ HEAVY MULTIPLICATION X
- 2717 ✖ BALLOT X
→ 2613 ✖ saltire
- 2718 ✖ HEAVY BALLOT X
- ### Crosses
- 2719 ☩ OUTLINED GREEK CROSS
- 271A ☩ HEAVY GREEK CROSS
- 271B ☩ OPEN CENTRE CROSS
- 271C ☩ HEAVY OPEN CENTRE CROSS

- 271D † LATIN CROSS
- 271E ☩ SHADOWED WHITE LATIN CROSS
- 271F ☩ OUTLINED LATIN CROSS
- 2720 ✠ MALTESE CROSS

• Historically, the Maltese cross took many forms; the shape shown in the Zapf Dingbats is similar to one known as the Cross Formée.

Stars, asterisks and snowflakes

- 2721 ☆ STAR OF DAVID
→ 1F52F ⚡ six pointed star with middle dot
- 2722 ✦ FOUR TEARDROP-SPOKED ASTERISK
- 2723 ✧ FOUR BALLOON-SPOKED ASTERISK
- 2724 ♣ HEAVY FOUR BALLOON-SPOKED ASTERISK
- 2725 ✨ FOUR CLUB-SPOKED ASTERISK
- 2726 ◆ BLACK FOUR POINTED STAR
- 2727 ◇ WHITE FOUR POINTED STAR
- 2728 ✨ SPARKLES
- 2729 ☆ STRESS OUTLINED WHITE STAR
→ 2606 ☆ white star
- 272A ☆ CIRCLED WHITE STAR
- 272B ☆ OPEN CENTRE BLACK STAR
- 272C ☆ BLACK CENTRE WHITE STAR
- 272D ☆ OUTLINED BLACK STAR
- 272E ☆ HEAVY OUTLINED BLACK STAR
- 272F ☆ PINWHEEL STAR
- 2730 ☆ SHADOWED WHITE STAR
- 2731 * HEAVY ASTERISK
→ 002A * asterisk
- 2732 * OPEN CENTRE ASTERISK
- 2733 * EIGHT SPOKED ASTERISK
- 2734 * EIGHT POINTED BLACK STAR
- 2735 * EIGHT POINTED PINWHEEL STAR
- 2736 * SIX POINTED BLACK STAR
= sextile
- 2737 * EIGHT POINTED RECTILINEAR BLACK STAR
- 2738 * HEAVY EIGHT POINTED RECTILINEAR BLACK STAR
- 2739 * TWELVE POINTED BLACK STAR
- 273A * SIXTEEN POINTED ASTERISK
= starburst
- 273B * TEARDROP-SPOKED ASTERISK
- 273C * OPEN CENTRE TEARDROP-SPOKED ASTERISK
- 273D * HEAVY TEARDROP-SPOKED ASTERISK
- 273E * SIX PETALLED BLACK AND WHITE FLORETTE
- 273F * BLACK FLORETTE
- 2740 * WHITE FLORETTE
→ 1F4AE 🌸 white flower
- 2741 * EIGHT PETALLED OUTLINED BLACK FLORETTE
- 2742 * CIRCLED OPEN CENTRE EIGHT POINTED STAR
- 2743 * HEAVY TEARDROP-SPOKED PINWHEEL ASTERISK
- 2744 * SNOWFLAKE
- 2745 * TIGHT TRIFOLIATE SNOWFLAKE
- 2746 * HEAVY CHEVRON SNOWFLAKE
- 2747 * SPARKLE
- 2748 * HEAVY SPARKLE
- 2749 * BALLOON-SPOKED ASTERISK
= jack
- 274A * EIGHT TEARDROP-SPOKED PROPELLER ASTERISK

274B ✱ HEAVY EIGHT TEARDROP-SPOKED PROPELLER
 ASTERISK
 = turbofan

Miscellaneous

274C ✕ CROSS MARK
 • forms a game tally pair with 2B55 ○
 → 00D7 ✕ multiplication sign

274D ○ SHADOWED WHITE CIRCLE

274E ☒ NEGATIVE SQUARED CROSS MARK

274F ◻ LOWER RIGHT DROP-SHADOWED WHITE SQUARE

2750 ◻ UPPER RIGHT DROP-SHADOWED WHITE SQUARE

2751 ◻ LOWER RIGHT SHADOWED WHITE SQUARE

2752 ◻ UPPER RIGHT SHADOWED WHITE SQUARE

2753 ? BLACK QUESTION MARK ORNAMENT

2754 ? WHITE QUESTION MARK ORNAMENT

2755 ! WHITE EXCLAMATION MARK ORNAMENT

2756 ❖ BLACK DIAMOND MINUS WHITE X

2757 ! HEAVY EXCLAMATION MARK SYMBOL
 = obstacles on the road, ARIB STD B24

2758 | LIGHT VERTICAL BAR
 → 007C | vertical line

2759 | MEDIUM VERTICAL BAR

275A ■ HEAVY VERTICAL BAR

Punctuation ornaments

275B ‘ HEAVY SINGLE TURNED COMMA QUOTATION MARK ORNAMENT
 → 2018 ‘ left single quotation mark

275C ’ HEAVY SINGLE COMMA QUOTATION MARK ORNAMENT
 → 2019 ’ right single quotation mark

275D “ HEAVY DOUBLE TURNED COMMA QUOTATION MARK ORNAMENT
 → 201C “ left double quotation mark

275E ” HEAVY DOUBLE COMMA QUOTATION MARK ORNAMENT
 → 201D ” right double quotation mark

275F , HEAVY LOW SINGLE COMMA QUOTATION MARK ORNAMENT
 → 201A , single low-9 quotation mark

2760 „ HEAVY LOW DOUBLE COMMA QUOTATION MARK ORNAMENT
 → 201E „ double low-9 quotation mark

2761 ¶ CURVED STEM PARAGRAPH SIGN ORNAMENT
 → 00B6 ¶ pilcrow sign

2762 ! HEAVY EXCLAMATION MARK ORNAMENT
 → 0021 ! exclamation mark

2763 ♥ HEAVY HEART EXCLAMATION MARK ORNAMENT

2764 ♥ HEAVY BLACK HEART
 → 2665 ♥ black heart suit

2765 ♣ ROTATED HEAVY BLACK HEART BULLET

2766 🍀 FLORAL HEART
 = Aldus leaf

2767 🍂 ROTATED FLORAL HEART BULLET
 = hедера, ivy leaf
 → 2619 🍂 reversed rotated floral heart bullet

Ornamental brackets

2768 (MEDIUM LEFT PARENTHESIS ORNAMENT
 → 0028 (left parenthesis

2769) MEDIUM RIGHT PARENTHESIS ORNAMENT
 → 0029) right parenthesis

276A (MEDIUM FLATTENED LEFT PARENTHESIS ORNAMENT

276B) MEDIUM FLATTENED RIGHT PARENTHESIS ORNAMENT

276C (MEDIUM LEFT-POINTING ANGLE BRACKET ORNAMENT
 → 2329 < left-pointing angle bracket

276D) MEDIUM RIGHT-POINTING ANGLE BRACKET ORNAMENT
 → 232A > right-pointing angle bracket

276E ‹ HEAVY LEFT-POINTING ANGLE QUOTATION MARK ORNAMENT
 → 2039 ‹ single left-pointing angle quotation mark

276F › HEAVY RIGHT-POINTING ANGLE QUOTATION MARK ORNAMENT
 → 203A › single right-pointing angle quotation mark

2770 ‹ HEAVY LEFT-POINTING ANGLE BRACKET ORNAMENT

2771 › HEAVY RIGHT-POINTING ANGLE BRACKET ORNAMENT

2772 { LIGHT LEFT TORTOISE SHELL BRACKET ORNAMENT
 → 3014 { left tortoise shell bracket

2773 } LIGHT RIGHT TORTOISE SHELL BRACKET ORNAMENT
 → 3015 } right tortoise shell bracket

2774 { MEDIUM LEFT CURLY BRACKET ORNAMENT
 → 007B { left curly bracket

2775 } MEDIUM RIGHT CURLY BRACKET ORNAMENT
 → 007D } right curly bracket

Dingbat circled digits

2776 ❶ DINGBAT NEGATIVE CIRCLED DIGIT ONE

2777 ❷ DINGBAT NEGATIVE CIRCLED DIGIT TWO

2778 ❸ DINGBAT NEGATIVE CIRCLED DIGIT THREE

2779 ❹ DINGBAT NEGATIVE CIRCLED DIGIT FOUR

277A ❺ DINGBAT NEGATIVE CIRCLED DIGIT FIVE

277B ❻ DINGBAT NEGATIVE CIRCLED DIGIT SIX

277C ❼ DINGBAT NEGATIVE CIRCLED DIGIT SEVEN

277D ❽ DINGBAT NEGATIVE CIRCLED DIGIT EIGHT

277E ❾ DINGBAT NEGATIVE CIRCLED DIGIT NINE

277F ❿ DINGBAT NEGATIVE CIRCLED NUMBER TEN

2780 ① DINGBAT CIRCLED SANS-SERIF DIGIT ONE

2781 ② DINGBAT CIRCLED SANS-SERIF DIGIT TWO

2782 ③ DINGBAT CIRCLED SANS-SERIF DIGIT THREE

2783 ④ DINGBAT CIRCLED SANS-SERIF DIGIT FOUR

2784 ⑤ DINGBAT CIRCLED SANS-SERIF DIGIT FIVE

2785 ⑥ DINGBAT CIRCLED SANS-SERIF DIGIT SIX

2786 ⑦ DINGBAT CIRCLED SANS-SERIF DIGIT SEVEN

2787 ⑧ DINGBAT CIRCLED SANS-SERIF DIGIT EIGHT

2788 ⑨ DINGBAT CIRCLED SANS-SERIF DIGIT NINE

2789 ⑩ DINGBAT CIRCLED SANS-SERIF NUMBER TEN

278A ❶ DINGBAT NEGATIVE CIRCLED SANS-SERIF DIGIT ONE

278B ❷ DINGBAT NEGATIVE CIRCLED SANS-SERIF DIGIT TWO

278C ❸ DINGBAT NEGATIVE CIRCLED SANS-SERIF DIGIT THREE

278D ❹ DINGBAT NEGATIVE CIRCLED SANS-SERIF DIGIT FOUR

- 278E ⑤ DINGBAT NEGATIVE CIRCLED SANS-SERIF DIGIT FIVE
- 278F ⑥ DINGBAT NEGATIVE CIRCLED SANS-SERIF DIGIT SIX
- 2790 ⑦ DINGBAT NEGATIVE CIRCLED SANS-SERIF DIGIT SEVEN
- 2791 ⑧ DINGBAT NEGATIVE CIRCLED SANS-SERIF DIGIT EIGHT
- 2792 ⑨ DINGBAT NEGATIVE CIRCLED SANS-SERIF DIGIT NINE
- 2793 ⑩ DINGBAT NEGATIVE CIRCLED SANS-SERIF NUMBER TEN

Dingbat arrow

- 2794 → HEAVY WIDE-HEADED RIGHTWARDS ARROW

Heavy variants of arithmetic symbols

- 2795 + HEAVY PLUS SIGN
→ 002B + plus sign
- 2796 − HEAVY MINUS SIGN
→ 2212 − minus sign
- 2797 ÷ HEAVY DIVISION SIGN
→ 00F7 ÷ division sign

Dingbat arrows

- 2798 ↘ HEAVY SOUTH EAST ARROW
- 2799 → HEAVY RIGHTWARDS ARROW
- 279A ↗ HEAVY NORTH EAST ARROW
- 279B ➤ DRAFTING POINT RIGHTWARDS ARROW
- 279C ➔ HEAVY ROUND-TIPPED RIGHTWARDS ARROW
- 279D → TRIANGLE-HEADED RIGHTWARDS ARROW
- 279E → HEAVY TRIANGLE-HEADED RIGHTWARDS ARROW
- 279F ⇢ DASHED TRIANGLE-HEADED RIGHTWARDS ARROW
- 27A0 ⇢ HEAVY DASHED TRIANGLE-HEADED RIGHTWARDS ARROW
- 27A1 ➔ BLACK RIGHTWARDS ARROW
• fonts may harmonize this glyph with the style for other black arrows
→ 2B05 ← leftwards black arrow
- 27A2 ➤ THREE-D TOP-LIGHTED RIGHTWARDS ARROWHEAD
- 27A3 ➤ THREE-D BOTTOM-LIGHTED RIGHTWARDS ARROWHEAD
- 27A4 ➤ BLACK RIGHTWARDS ARROWHEAD
- 27A5 ➤ HEAVY BLACK CURVED DOWNWARDS AND RIGHTWARDS ARROW
- 27A6 ➤ HEAVY BLACK CURVED UPWARDS AND RIGHTWARDS ARROW
- 27A7 ➤ SQUAT BLACK RIGHTWARDS ARROW
- 27A8 ➤ HEAVY CONCAVE-POINTED BLACK RIGHTWARDS ARROW
- 27A9 ⇨ RIGHT-SHADED WHITE RIGHTWARDS ARROW
- 27AA ⇨ LEFT-SHADED WHITE RIGHTWARDS ARROW
- 27AB ⇨ BACK-TILTED SHADOWED WHITE RIGHTWARDS ARROW
- 27AC ⇨ FRONT-TILTED SHADOWED WHITE RIGHTWARDS ARROW
- 27AD ⇨ HEAVY LOWER RIGHT-SHADOWED WHITE RIGHTWARDS ARROW
- 27AE ⇨ HEAVY UPPER RIGHT-SHADOWED WHITE RIGHTWARDS ARROW
- 27AF ⇨ NOTCHED LOWER RIGHT-SHADOWED WHITE RIGHTWARDS ARROW

Miscellaneous


















































































































































































































- 27B0 ㉿ CURLY LOOP
= kururi

Dingbat arrows

- 27B1 ⇨ NOTCHED UPPER RIGHT-SHADOWED WHITE RIGHTWARDS ARROW
- 27B2 ⇨ CIRCLED HEAVY WHITE RIGHTWARDS ARROW
- 27B3 ➤ WHITE-FEATHERED RIGHTWARDS ARROW
- 27B4 ↘ BLACK-FEATHERED SOUTH EAST ARROW
- 27B5 ➤ BLACK-FEATHERED RIGHTWARDS ARROW
- 27B6 ↗ BLACK-FEATHERED NORTH EAST ARROW
- 27B7 ↘ HEAVY BLACK-FEATHERED SOUTH EAST ARROW
- 27B8 ➤ HEAVY BLACK-FEATHERED RIGHTWARDS ARROW
- 27B9 ↗ HEAVY BLACK-FEATHERED NORTH EAST ARROW
- 27BA ➤ TEARDROP-BARBED RIGHTWARDS ARROW
- 27BB ⇨ HEAVY TEARDROP-SHANKED RIGHTWARDS ARROW
- 27BC ➤ WEDGE-TAILED RIGHTWARDS ARROW
- 27BD ➤ HEAVY WEDGE-TAILED RIGHTWARDS ARROW
- 27BE ⇨ OPEN-OUTLINED RIGHTWARDS ARROW

Miscellaneous

- 27BF ㉿ DOUBLE CURLY LOOP

| | 2B0 | 2B1 | 2B2 | 2B3 | 2B4 | 2B5 | 2B6 | 2B7 | 2B8 | 2B9 | 2BA | 2BB | 2BC | 2BD | 2BE | 2BF |
|---|--|--|--|--|--|--|--|--|--|--|---|--|---|--|-----|-----|
| 0 |  2B00 |  2B10 |  2B20 |  2B30 |  2B40 |  2B50 |  2B60 |  2B70 |  2B80 |  2B90 |  2BA0 |  2BB0 |  2BC0 |  2BD0 | | |
| 1 |  2B01 |  2B11 |  2B21 |  2B31 |  2B41 |  2B51 |  2B61 |  2B71 |  2B81 |  2B91 |  2BA1 |  2BB1 |  2BC1 |  2BD1 | | |
| 2 |  2B02 |  2B12 |  2B22 |  2B32 |  2B42 |  2B52 |  2B62 |  2B72 |  2B82 |  2B92 |  2BA2 |  2BB2 |  2BC2 | | | |
| 3 |  2B03 |  2B13 |  2B23 |  2B33 |  2B43 |  2B53 |  2B63 |  2B73 |  2B83 |  2B93 |  2BA3 |  2BB3 |  2BC3 | | | |
| 4 |  2B04 |  2B14 |  2B24 |  2B34 |  2B44 |  2B54 |  2B64 |  2B74 |  2B84 |  2B94 |  2BA4 |  2BB4 |  2BC4 | | | |
| 5 |  2B05 |  2B15 |  2B25 |  2B35 |  2B45 |  2B55 |  2B65 |  2B75 |  2B85 |  2B95 |  2BA5 |  2BB5 |  2BC5 | | | |
| 6 |  2B06 |  2B16 |  2B26 |  2B36 |  2B46 |  2B56 |  2B66 |  2B76 |  2B86 |  2B96 |  2BA6 |  2BB6 |  2BC6 | | | |
| 7 |  2B07 |  2B17 |  2B27 |  2B37 |  2B47 |  2B57 |  2B67 |  2B77 |  2B87 |  2B97 |  2BA7 |  2BB7 |  2BC7 | | | |
| 8 |  2B08 |  2B18 |  2B28 |  2B38 |  2B48 |  2B58 |  2B68 |  2B78 |  2B88 |  2B98 |  2BA8 |  2BB8 |  2BC8 | | | |
| 9 |  2B09 |  2B19 |  2B29 |  2B39 |  2B49 |  2B59 |  2B69 |  2B79 |  2B89 |  2B99 |  2BA9 |  2BB9 | | | | |
| A |  2B0A |  2B1A |  2B2A |  2B3A |  2B4A |  2B5A |  2B6A |  2B7A |  2B8A |  2B9A |  2BA A |  2BB A |  2BC A | | | |
| B |  2B0B |  2B1B |  2B2B |  2B3B |  2B4B |  2B5B |  2B6B |  2B7B |  2B8B |  2B9B |  2BA B |  2BB B |  2BC B | | | |
| C |  2B0C |  2B1C |  2B2C |  2B3C |  2B4C |  2B5C |  2B6C |  2B7C |  2B8C |  2B9C |  2BA C |  2BB C |  2BC C | | | |
| D |  2B0D |  2B1D |  2B2D |  2B3D |  2B4D |  2B5D |  2B6D |  2B7D |  2B8D |  2B9D |  2BA D |  2BB D |  2BC D | | | |
| E |  2B0E |  2B1E |  2B2E |  2B3E |  2B4E |  2B5E |  2B6E |  2B7E |  2B8E |  2B9E |  2BA E |  2BB E |  2BC E | | | |
| F |  2B0F |  2B1F |  2B2F |  2B3F |  2B4F |  2B5F |  2B6F |  2B7F |  2B8F |  2B9F |  2BA F |  2BB F |  2BC F | | | |

White and black arrows

Other white and black arrows to complete this set can be found in the *Arrows and Dingbats* blocks.

| | | |
|------|---|--|
| 2B00 | ↗ | NORTH EAST WHITE ARROW |
| 2B01 | ↖ | NORTH WEST WHITE ARROW |
| 2B02 | ↘ | SOUTH EAST WHITE ARROW |
| 2B03 | ↙ | SOUTH WEST WHITE ARROW |
| 2B04 | ↔ | LEFT RIGHT WHITE ARROW → 21E6 ↔ leftwards white arrow → 21F3 ⇅ up down white arrow |
| 2B05 | ← | LEFTWARDS BLACK ARROW → 27A1 → black rightwards arrow |
| 2B06 | ↑ | UPWARDS BLACK ARROW |
| 2B07 | ↓ | DOWNWARDS BLACK ARROW |
| 2B08 | ↗ | NORTH EAST BLACK ARROW |
| 2B09 | ↖ | NORTH WEST BLACK ARROW |
| 2B0A | ↘ | SOUTH EAST BLACK ARROW |
| 2B0B | ↙ | SOUTH WEST BLACK ARROW |
| 2B0C | ↔ | LEFT RIGHT BLACK ARROW |
| 2B0D | ⇅ | UP DOWN BLACK ARROW |

Arrows with bent tips

Other arrows with bent tips to complete this set can be found in the *Arrows* block.

| | | |
|------|---|-------------------------------------|
| 2B0E | ↘ | RIGHTWARDS ARROW WITH TIP DOWNWARDS |
| 2B0F | ↙ | RIGHTWARDS ARROW WITH TIP UPWARDS |
| 2B10 | ↖ | LEFTWARDS ARROW WITH TIP DOWNWARDS |
| 2B11 | ↗ | LEFTWARDS ARROW WITH TIP UPWARDS |

Squares

| | | |
|------|---|--|
| 2B12 | ◼ | SQUARE WITH TOP HALF BLACK → 25E7 ◼ square with left half black |
| 2B13 | ◼ | SQUARE WITH BOTTOM HALF BLACK |
| 2B14 | ◼ | SQUARE WITH UPPER RIGHT DIAGONAL HALF BLACK |
| 2B15 | ◼ | SQUARE WITH LOWER LEFT DIAGONAL HALF BLACK |

Diamonds

| | | |
|------|---|--------------------------------|
| 2B16 | ◈ | DIAMOND WITH LEFT HALF BLACK |
| 2B17 | ◈ | DIAMOND WITH RIGHT HALF BLACK |
| 2B18 | ◈ | DIAMOND WITH TOP HALF BLACK |
| 2B19 | ◈ | DIAMOND WITH BOTTOM HALF BLACK |

Squares

| | | |
|------|---|--|
| 2B1A | ◻ | DOTTED SQUARE |
| 2B1B | ◼ | BLACK LARGE SQUARE → 25A0 ◼ black square |
| 2B1C | ◻ | WHITE LARGE SQUARE → 25A1 ◻ white square |
| 2B1D | ◼ | BLACK VERY SMALL SQUARE → 25AA ◼ black small square |
| 2B1E | ◻ | WHITE VERY SMALL SQUARE → 25AB ◻ white small square |

Pentagons

| | | |
|------|---|----------------|
| 2B1F | ⬠ | BLACK PENTAGON |
| 2B20 | ⬡ | WHITE PENTAGON |

Hexagons

| | | |
|------|---|--------------------------|
| 2B21 | ⬢ | WHITE HEXAGON |
| 2B22 | ⬤ | BLACK HEXAGON |
| 2B23 | ⬢ | HORIZONTAL BLACK HEXAGON |

Circle

| | | |
|------|---|--|
| 2B24 | ● | BLACK LARGE CIRCLE → 25CF ● black circle → 25EF ○ large circle → 1F534 ● large red circle |
|------|---|--|

Diamonds and lozenges

| | | |
|------|---|--|
| 2B25 | ◆ | BLACK MEDIUM DIAMOND → 25C6 ◆ black diamond |
| 2B26 | ◇ | WHITE MEDIUM DIAMOND → 25C7 ◇ white diamond → 1F754 ◇ alchemical symbol for soap |
| 2B27 | ♠ | BLACK MEDIUM LOZENGE |
| 2B28 | ♢ | WHITE MEDIUM LOZENGE → 25CA ♢ lozenge |
| 2B29 | ♠ | BLACK SMALL DIAMOND → 22C4 ♠ diamond operator → 1F538 ♠ small orange diamond |
| 2B2A | ♣ | BLACK SMALL LOZENGE |
| 2B2B | ♢ | WHITE SMALL LOZENGE |

Ellipses

| | | |
|------|---|--------------------------|
| 2B2C | ◌ | BLACK HORIZONTAL ELLIPSE |
| 2B2D | ◯ | WHITE HORIZONTAL ELLIPSE |
| 2B2E | ◐ | BLACK VERTICAL ELLIPSE |
| 2B2F | ◯ | WHITE VERTICAL ELLIPSE |

Mathematical arrows

These provide the opposite direction complement for arrows for mathematical use not originally encoded in both a leftwards and rightwards direction.

| | | |
|------|---|--|
| 2B30 | ↔ | LEFT ARROW WITH SMALL CIRCLE → 21F4 ↔ right arrow with small circle |
| 2B31 | ⇌ | THREE LEFTWARDS ARROWS → 21F6 ⇌ three rightwards arrows |
| 2B32 | ↔ | LEFT ARROW WITH CIRCLED PLUS → 27F4 ↻ right arrow with circled plus |
| 2B33 | ↔ | LONG LEFTWARDS SQUIGGLE ARROW → 27FF ↻ long rightwards squiggle arrow → 21DC ↻ leftwards squiggle arrow |
| 2B34 | ↔ | LEFTWARDS TWO-HEADED ARROW WITH VERTICAL STROKE → 2900 ↔ rightwards two-headed arrow with vertical stroke |
| 2B35 | ↔ | LEFTWARDS TWO-HEADED ARROW WITH DOUBLE VERTICAL STROKE → 2901 ↔ rightwards two-headed arrow with double vertical stroke |
| 2B36 | ↔ | LEFTWARDS TWO-HEADED ARROW FROM BAR → 2905 ↔ rightwards two-headed arrow from bar |
| 2B37 | ↔ | LEFTWARDS TWO-HEADED TRIPLE DASH ARROW → 2910 ↔ rightwards two-headed triple dash arrow |
| 2B38 | ↔ | LEFTWARDS ARROW WITH DOTTED STEM → 2911 ↔ rightwards arrow with dotted stem |
| 2B39 | ↔ | LEFTWARDS ARROW WITH TAIL WITH VERTICAL STROKE → 2914 ↔ rightwards arrow with tail with vertical stroke |
| 2B3A | ↔ | LEFTWARDS ARROW WITH TAIL WITH DOUBLE VERTICAL STROKE → 2915 ↔ rightwards arrow with tail with double vertical stroke |

- 2B3B ← LEFTWARDS TWO-HEADED ARROW WITH TAIL
→ 2916 ⇨ rightwards two-headed arrow with tail
- 2B3C ⇚ LEFTWARDS TWO-HEADED ARROW WITH TAIL WITH VERTICAL STROKE
→ 2917 ⇨ rightwards two-headed arrow with tail with vertical stroke
- 2B3D ⇚ LEFTWARDS TWO-HEADED ARROW WITH TAIL WITH DOUBLE VERTICAL STROKE
→ 2918 ⇨ rightwards two-headed arrow with tail with double vertical stroke
- 2B3E ⇚ LEFTWARDS ARROW THROUGH X
→ 2947 ⇨ rightwards arrow through x
- 2B3F ↵ WAVE ARROW POINTING DIRECTLY LEFT
→ 2933 ~ wave arrow pointing directly right
→ 219C ~ leftwards wave arrow
- 2B40 ⚖ EQUALS SIGN ABOVE LEFTWARDS ARROW
→ 2971 ⇨ equals sign above rightwards arrow
- 2B41 ⇚ REVERSE TILDE OPERATOR ABOVE LEFTWARDS ARROW
• mirror image of “⇚”
→ 2972 ⇨ tilde operator above rightwards arrow
- 2B42 ⇚ LEFTWARDS ARROW ABOVE REVERSE ALMOST EQUAL TO
• mirror image of “⇚”
→ 2975 ⇨ rightwards arrow above almost equal to
- 2B43 ⇨ RIGHTWARDS ARROW THROUGH GREATER-THAN
• mirror image of “⇨”
→ 2977 ⇨ leftwards arrow through less-than
- 2B44 ⇨ RIGHTWARDS ARROW THROUGH SUPERSET
• mirror image of “⇨”
→ 297A ⇨ leftwards arrow through subset
- 2B45 ⇨ LEFTWARDS QUADRUPLE ARROW
→ 27F0 ⇨ upwards quadruple arrow
- 2B46 ⇨ RIGHTWARDS QUADRUPLE ARROW
- 2B47 ⇨ REVERSE TILDE OPERATOR ABOVE RIGHTWARDS ARROW
- 2B48 ⇨ RIGHTWARDS ARROW ABOVE REVERSE ALMOST EQUAL TO
- 2B49 ⇨ TILDE OPERATOR ABOVE LEFTWARDS ARROW
- 2B4A ⇨ LEFTWARDS ARROW ABOVE ALMOST EQUAL TO
- 2B4B ⇨ LEFTWARDS ARROW ABOVE REVERSE TILDE OPERATOR
• mirror image of “⇨”
→ 2974 ⇨ rightwards arrow above tilde operator
- 2B4C ⇨ RIGHTWARDS ARROW ABOVE REVERSE TILDE OPERATOR
• mirror image of “⇨”
→ 2973 ⇨ leftwards arrow above tilde operator

Triangle-headed zigzag arrow

- 2B4D ⇚ DOWNWARDS TRIANGLE-HEADED ZIGZAG ARROW
→ 21AF ⇚ downwards zigzag arrow

Intonation marks for Lithuanian dialectology

- 2B4E ↗ SHORT SLANTED NORTH ARROW
• slight rise in tone
- 2B4F ↘ SHORT BACKSLANTED SOUTH ARROW
• slight fall or overall fall in tone when at the end of a word or at the beginning of a phrase respectively

Stars

- 2B50 * WHITE MEDIUM STAR
→ 22C6 * star operator
- 2B51 * BLACK SMALL STAR
→ 066D * arabic five pointed star
- 2B52 * WHITE SMALL STAR

Pentagons

- 2B53 ⬛ BLACK RIGHT-POINTING PENTAGON
- 2B54 ⬜ WHITE RIGHT-POINTING PENTAGON

Traffic sign from ARIB STD B24

- 2B55 ○ HEAVY LARGE CIRCLE
= basic symbol for speed limit
• forms a game tally pair with 274C ✕
→ 25EF ○ large circle

Dictionary and map symbols from ARIB STD B24

- 2B56 ◎ HEAVY OVAL WITH OVAL INSIDE
= prefectural office
- 2B57 ⦿ HEAVY CIRCLE WITH CIRCLE INSIDE
= municipal office
→ 25CE ⦿ bullseye
- 2B58 ○ HEAVY CIRCLE
= town or village office
→ 25CB ○ white circle
- 2B59 ⊗ HEAVY CIRCLED SALTIRE
= police station
→ 2A02 ⊗ n-ary circled times operator

Intonation marks for Lithuanian dialectology

- 2B5A ↗ SLANTED NORTH ARROW WITH HOOKED HEAD
• increasing tone with falling trend at the end
- 2B5B ↘ BACKSLANTED SOUTH ARROW WITH HOOKED TAIL
• sharp rise and fall in tone
- 2B5C ↗ SLANTED NORTH ARROW WITH HORIZONTAL TAIL
• continued rise in tone
- 2B5D ↘ BACKSLANTED SOUTH ARROW WITH HORIZONTAL TAIL
• continued fall in tone
- 2B5E ↘ BENT ARROW POINTING DOWNWARDS THEN NORTH EAST
• sharp fall in tone with rising trend at the end
- 2B5F ↘ SHORT BENT ARROW POINTING DOWNWARDS THEN NORTH EAST
• slight fall in tone with rising trend at the end

Simple triangle-headed arrows

- 2B60 ← LEFTWARDS TRIANGLE-HEADED ARROW
→ 2190 ← leftwards arrow
- 2B61 ↑ UPWARDS TRIANGLE-HEADED ARROW
→ 2191 ↑ upwards arrow
- 2B62 → RIGHTWARDS TRIANGLE-HEADED ARROW
→ 279D → triangle-headed rightwards arrow
→ 2192 → rightwards arrow
- 2B63 ↓ DOWNWARDS TRIANGLE-HEADED ARROW
→ 2193 ↓ downwards arrow
- 2B64 ↔ LEFT RIGHT TRIANGLE-HEADED ARROW
→ 2194 ↔ left right arrow
- 2B65 ⇕ UP DOWN TRIANGLE-HEADED ARROW
→ 2195 ⇕ up down arrow
- 2B66 ↖ NORTH WEST TRIANGLE-HEADED ARROW
→ 2196 ↖ north west arrow

| | | |
|------|---|---|
| 2B67 | ↗ | NORTH EAST TRIANGLE-HEADED ARROW → 2197 ↗ north east arrow |
| 2B68 | ↘ | SOUTH EAST TRIANGLE-HEADED ARROW → 2198 ↘ south east arrow |
| 2B69 | ↙ | SOUTH WEST TRIANGLE-HEADED ARROW → 2199 ↙ south west arrow |

Triangle-headed dashed arrows



| | | |
|------|---|---|
| 2B6A | ↔ | LEFTWARDS TRIANGLE-HEADED DASHED ARROW → 21E0 ↔ leftwards dashed arrow |
| 2B6B | ↑ | UPWARDS TRIANGLE-HEADED DASHED ARROW → 21E1 ↑ upwards dashed arrow |
| 2B6C | → | RIGHTWARDS TRIANGLE-HEADED DASHED ARROW → 21E2 → rightwards dashed arrow |
| 2B6D | ↓ | DOWNWARDS TRIANGLE-HEADED DASHED ARROW → 21E3 ↓ downwards dashed arrow |

Triangle-headed open circle arrows

| | | |
|------|---|---|
| 2B6E | ↻ | CLOCKWISE TRIANGLE-HEADED OPEN CIRCLE ARROW → 21BB ↻ clockwise open circle arrow |
| 2B6F | ↺ | ANTICLOCKWISE TRIANGLE-HEADED OPEN CIRCLE ARROW → 21BA ↺ anticlockwise open circle arrow |

Triangle-headed arrows to bar

| | | |
|------|---|--|
| 2B70 | ← | LEFTWARDS TRIANGLE-HEADED ARROW TO BAR = left tab → 21E4 ← leftwards arrow to bar |
| 2B71 | ↑ | UPWARDS TRIANGLE-HEADED ARROW TO BAR = up tab → 2912 ↑ upwards arrow to bar |
| 2B72 | → | RIGHTWARDS TRIANGLE-HEADED ARROW TO BAR = right tab → 21E5 → rightwards arrow to bar |
| 2B73 | ↓ | DOWNWARDS TRIANGLE-HEADED ARROW TO BAR = down tab → 2913 ↓ downwards arrow to bar |

2B74  <reserved>2B75  <reserved>

| | | |
|------|---|---|
| 2B76 | ↖ | NORTH WEST TRIANGLE-HEADED ARROW TO BAR = home |
| 2B77 | ↗ | NORTH EAST TRIANGLE-HEADED ARROW TO BAR |
| 2B78 | ↘ | SOUTH EAST TRIANGLE-HEADED ARROW TO BAR = end |
| 2B79 | ↙ | SOUTH WEST TRIANGLE-HEADED ARROW TO BAR |

Triangle-headed arrows with double horizontal stroke

| | | |
|------|---|--|
| 2B7A | ↔ | LEFTWARDS TRIANGLE-HEADED ARROW WITH DOUBLE HORIZONTAL STROKE |
| 2B7B | ↑ | UPWARDS TRIANGLE-HEADED ARROW WITH DOUBLE HORIZONTAL STROKE = page up |
| 2B7C | → | RIGHTWARDS TRIANGLE-HEADED ARROW WITH DOUBLE HORIZONTAL STROKE |

| | | |
|------|---|--|
| 2B7D | ⤵ | DOWNWARDS TRIANGLE-HEADED ARROW WITH DOUBLE HORIZONTAL STROKE = page down |
|------|---|--|

Paired triangle-headed arrows

| | | |
|------|---|--|
| 2B7E | ⇆ | HORIZONTAL TAB KEY |
| 2B7F | ⇅ | VERTICAL TAB KEY |
| 2B80 | ↔ | LEFTWARDS TRIANGLE-HEADED ARROW OVER RIGHTWARDS TRIANGLE-HEADED ARROW → 21C6 ↔ leftwards arrow over rightwards arrow |
| 2B81 | ↕ | UPWARDS TRIANGLE-HEADED ARROW LEFTWARDS DOWNWARDS OF TRIANGLE-HEADED ARROW |
| 2B82 | ↔ | RIGHTWARDS TRIANGLE-HEADED ARROW OVER LEFTWARDS TRIANGLE-HEADED ARROW |
| 2B83 | ↕ | DOWNWARDS TRIANGLE-HEADED ARROW LEFTWARDS OF UPWARDS TRIANGLE-HEADED ARROW → 21C6 ↕ leftwards arrow over rightwards arrow |
| 2B84 | ↔ | LEFTWARDS TRIANGLE-HEADED PAIRED ARROWS → 21C7 ↔ leftwards paired arrows |
| 2B85 | ↕ | UPWARDS TRIANGLE-HEADED PAIRED ARROWS → 21C8 ↕ upwards paired arrows |
| 2B86 | ↔ | RIGHTWARDS TRIANGLE-HEADED PAIRED ARROWS → 21C9 ↔ rightwards paired arrows |
| 2B87 | ↕ | DOWNWARDS TRIANGLE-HEADED PAIRED ARROWS → 21CA ↕ downwards paired arrows |

Circled arrows

| | | |
|------|---|---|
| 2B88 | ↶ | LEFTWARDS BLACK CIRCLED WHITE ARROW |
| 2B89 | ↷ | UPWARDS BLACK CIRCLED WHITE ARROW |
| 2B8A | ↸ | RIGHTWARDS BLACK CIRCLED WHITE ARROW → 27B2 ↸ circled heavy white rightwards arrow |
| 2B8B | ↵ | DOWNWARDS BLACK CIRCLED WHITE ARROW |

Triangle-headed u-shaped arrows

| | | |
|------|---|---|
| 2B8C | ↶ | ANTICLOCKWISE TRIANGLE-HEADED RIGHT U-SHAPED ARROW |
| 2B8D | ↷ | ANTICLOCKWISE TRIANGLE-HEADED BOTTOM U-SHAPED ARROW |
| 2B8E | ↶ | ANTICLOCKWISE TRIANGLE-HEADED LEFT U-SHAPED ARROW |
| 2B8F | ↷ | ANTICLOCKWISE TRIANGLE-HEADED TOP U-SHAPED ARROW → 21B6 ↷ anticlockwise top semicircle arrow |

Keyboard symbols

| | | |
|------|---|---------------------------------------|
| 2B90 | ↵ | RETURN LEFT → 23CE ↵ return symbol |
| 2B91 | ↶ | RETURN RIGHT |
| 2B92 | ↶ | NEWLINE LEFT |
| 2B93 | ↶ | NEWLINE RIGHT |

Miscellaneous arrow symbol

| | | |
|------|---|---|
| 2B94 | ↻ | FOUR CORNER ARROWS CIRCLING ANTICLOCKWISE = loop |
|------|---|---|

Black arrow

| | | |
|------|---|---|
| 2B95 | ➡ | RIGHTWARDS BLACK ARROW → 27A1 ➡ black rightwards arrow → 2B05 ← leftwards black arrow |
|------|---|---|

Arrowheads

These sets are narrower than the dingbats set

| | | |
|------|---|---|
| 2B98 | ↖ | THREE-D TOP-LIGHTED LEFTWARDS EQUILATERAL ARROWHEAD |
| 2B99 | ↗ | THREE-D RIGHT-LIGHTED UPWARDS EQUILATERAL ARROWHEAD |
| 2B9A | ↘ | THREE-D TOP-LIGHTED RIGHTWARDS EQUILATERAL ARROWHEAD → 27A2 ➤ three-d top-lighted rightwards arrowhead |
| 2B9B | ↙ | THREE-D LEFT-LIGHTED DOWNWARDS EQUILATERAL ARROWHEAD |
| 2B9C | ◀ | BLACK LEFTWARDS EQUILATERAL ARROWHEAD |
| 2B9D | ▲ | BLACK UPWARDS EQUILATERAL ARROWHEAD |
| 2B9E | ▶ | BLACK RIGHTWARDS EQUILATERAL ARROWHEAD → 27A4 ➤ black rightwards arrowhead |
| 2B9F | ▼ | BLACK DOWNWARDS EQUILATERAL ARROWHEAD |

Triangle-headed arrows with bent tips

| | | |
|------|---|--|
| 2BA0 | ↵ | DOWNWARDS TRIANGLE-HEADED ARROW WITH LONG TIP LEFTWARDS → 21B2 ↓ downwards arrow with tip leftwards |
| 2BA1 | ↶ | DOWNWARDS TRIANGLE-HEADED ARROW WITH LONG TIP RIGHTWARDS → 21B3 ↘ downwards arrow with tip rightwards |
| 2BA2 | ↷ | UPWARDS TRIANGLE-HEADED ARROW WITH LONG TIP LEFTWARDS → 21B0 ↑ upwards arrow with tip leftwards |
| 2BA3 | ↸ | UPWARDS TRIANGLE-HEADED ARROW WITH LONG TIP RIGHTWARDS → 21B1 ↗ upwards arrow with tip rightwards |
| 2BA4 | ↰ | LEFTWARDS TRIANGLE-HEADED ARROW WITH LONG TIP UPWARDS → 2B11 ← leftwards arrow with tip upwards |
| 2BA5 | ↱ | RIGHTWARDS TRIANGLE-HEADED ARROW WITH LONG TIP UPWARDS → 2B0F → rightwards arrow with tip upwards |
| 2BA6 | ↲ | LEFTWARDS TRIANGLE-HEADED ARROW WITH LONG TIP DOWNWARDS → 2B10 ← leftwards arrow with tip downwards |
| 2BA7 | ↳ | RIGHTWARDS TRIANGLE-HEADED ARROW WITH LONG TIP DOWNWARDS → 2B0E → rightwards arrow with tip downwards |

Black curved arrows

| | | |
|------|---|---|
| 2BA8 | ↶ | BLACK CURVED DOWNWARDS AND LEFTWARDS ARROW |
| 2BA9 | ↷ | BLACK CURVED DOWNWARDS AND RIGHTWARDS ARROW → 27A5 ➤ heavy black curved downwards and rightwards arrow |
| 2BAA | ↶ | BLACK CURVED UPWARDS AND LEFTWARDS ARROW |
| 2BAB | ↷ | BLACK CURVED UPWARDS AND RIGHTWARDS ARROW → 27A6 ➤ heavy black curved upwards and rightwards arrow |
| 2BAC | ↰ | BLACK CURVED LEFTWARDS AND UPWARDS ARROW |
| 2BAD | ↱ | BLACK CURVED RIGHTWARDS AND UPWARDS ARROW |
| 2BAE | ↲ | BLACK CURVED LEFTWARDS AND DOWNWARDS ARROW |

| | | |
|------|---|---|
| 2BAF | ↴ | BLACK CURVED RIGHTWARDS AND DOWNWARDS ARROW |
|------|---|---|

Ribbon arrows

| | | |
|------|---|-------------------------|
| 2BB0 | ↵ | RIBBON ARROW DOWN LEFT |
| 2BB1 | ↶ | RIBBON ARROW DOWN RIGHT |
| 2BB2 | ↷ | RIBBON ARROW UP LEFT |
| 2BB3 | ↸ | RIBBON ARROW UP RIGHT |
| 2BB4 | ↰ | RIBBON ARROW LEFT UP |
| 2BB5 | ↱ | RIBBON ARROW RIGHT UP |
| 2BB6 | ↲ | RIBBON ARROW LEFT DOWN |
| 2BB7 | ↳ | RIBBON ARROW RIGHT DOWN |

Keyboard symbols

| | | |
|------|---|---|
| 2BB8 | ⏏ | UPWARDS WHITE ARROW FROM BAR WITH HORIZONTAL BAR = caps lock → 21EC ⏏ upwards white arrow on pedestal with horizontal bar |
| 2BB9 | ⏏ | UP ARROWHEAD IN A RECTANGLE BOX = escape → 2353 ⏏ apl functional symbol quad up caret |

Geometric symbols

| | | |
|------|---|--|
| 2BBD | ☒ | BALLOT BOX WITH LIGHT X = box x → 2612 ☒ ballot box with x |
| 2BBE | ⊗ | CIRCLED X → 2297 ⊗ circled times |
| 2BBF | ⊗ | CIRCLED BOLD X = circled x bold |

Centred geometric shapes

| | | |
|------|---|---|
| 2BC0 | ■ | BLACK SQUARE CENTRED |
| 2BC1 | ◆ | BLACK DIAMOND CENTRED |
| 2BC2 | ⬛ | TURNED BLACK PENTAGON |
| 2BC3 | ⬛ | HORIZONTAL BLACK OCTAGON = black octagon 1 |
| 2BC4 | ⬛ | BLACK OCTAGON = black octagon 2 |
| 2BC5 | ▲ | BLACK MEDIUM UP-POINTING TRIANGLE CENTRED |
| 2BC6 | ▼ | BLACK MEDIUM DOWN-POINTING TRIANGLE CENTRED |
| 2BC7 | ◀ | BLACK MEDIUM LEFT-POINTING TRIANGLE CENTRED |
| 2BC8 | ▶ | BLACK MEDIUM RIGHT-POINTING TRIANGLE CENTRED |

Half circles

| | | |
|------|---|--------------------------|
| 2BCA | ◐ | TOP HALF BLACK CIRCLE |
| 2BCB | ◑ | BOTTOM HALF BLACK CIRCLE |

Cusp shapes




































































| | | |
|------|---|---|
| 2BCC | ✧ | LIGHT FOUR POINTED BLACK CUSP → 2726 ✧ black four pointed star |
| 2BCD | ⚡ | ROTATED LIGHT FOUR POINTED BLACK CUSP |
| 2BCE | ✦ | WHITE FOUR POINTED CUSP → 2727 ✦ white four pointed star |
| 2BCF | ⚡ | ROTATED WHITE FOUR POINTED CUSP → 2311 ⚡ square lozenge |

Position indicator

| | | |
|------|---|---|
| 2BD0 | ⊞ | SQUARE POSITION INDICATOR = register square → 2316 ⊞ position indicator |
|------|---|---|

Diamond shape

2BD1 ◊ UNCERTAINTY SIGN
= query
→ 2370 ◻ apl functional symbol quad question
→ FFFD ◊ replacement character

| | 2E0 | 2E1 | 2E2 | 2E3 | 2E4 | 2E5 | 2E6 | 2E7 |
|---|---|---|---|---|---|-----|-----|-----|
| 0 |  2E00 |  2E10 |  2E20 |  2E30 |  2E40 | | | |
| 1 |  2E01 |  2E11 |  2E21 |  2E31 |  2E41 | | | |
| 2 |  2E02 |  2E12 |  2E22 |  2E32 |  2E42 | | | |
| 3 |  2E03 |  2E13 |  2E23 |  2E33 | | | | |
| 4 |  2E04 |  2E14 |  2E24 |  2E34 | | | | |
| 5 |  2E05 |  2E15 |  2E25 |  2E35 | | | | |
| 6 |  2E06 |  2E16 |  2E26 |  2E36 | | | | |
| 7 |  2E07 |  2E17 |  2E27 |  2E37 | | | | |
| 8 |  2E08 |  2E18 |  2E28 |  2E38 | | | | |
| 9 |  2E09 |  2E19 |  2E29 |  2E39 | | | | |
| A |  2E0A |  2E1A |  2E2A |  2E3A | | | | |
| B |  2E0B |  2E1B |  2E2B |  2E3B | | | | |
| C |  2E0C |  2E1C |  2E2C |  2E3C | | | | |
| D |  2E0D |  2E1D |  2E2D |  2E3D | | | | |
| E |  2E0E |  2E1E |  2E2E |  2E3E | | | | |
| F |  2E0F |  2E1F |  2E2F |  2E3F | | | | |

New Testament editorial symbols

- 2E00 ∟ RIGHT ANGLE SUBSTITUTION MARKER
→ 231C ∟ top left corner
- 2E01 ∟ RIGHT ANGLE DOTTED SUBSTITUTION MARKER
- 2E02 ∟ LEFT SUBSTITUTION BRACKET
- 2E03 ∟ RIGHT SUBSTITUTION BRACKET
- 2E04 ∟ LEFT DOTTED SUBSTITUTION BRACKET
- 2E05 ∟ RIGHT DOTTED SUBSTITUTION BRACKET
- 2E06 T RAISED INTERPOLATION MARKER
→ 22A4 T down tack
- 2E07 T RAISED DOTTED INTERPOLATION MARKER
- 2E08 S DOTTED TRANSPOSITION MARKER
- 2E09 S LEFT TRANSPOSITION BRACKET
- 2E0A Z RIGHT TRANSPOSITION BRACKET
- 2E0B □ RAISED SQUARE
• used as an opening raised omission bracket
- 2E0C \ LEFT RAISED OMISSION BRACKET
• used as an opening or closing raised omission bracket
- 2E0D / RIGHT RAISED OMISSION BRACKET
• used as a closing or opening raised omission bracket

Ancient Greek textual symbols

- 2E0E ☩ EDITORIAL CORONIS
→ 1FBD ☩ greek koronis
- 2E0F — PARAGRAPHOS
- 2E10 — FORKED PARAGRAPHOS
- 2E11 — REVERSED FORKED PARAGRAPHOS
- 2E12 ∩ HYPODIASTOLE
= ypodiastoli
- 2E13 ∕ DOTTED OBELOS
• glyph variants may look like ‘∕’ or ‘∕’
→ 2052 ∕ commercial minus sign
- 2E14 √ DOWNWARDS ANCORA
• contrary to its formal name this symbol points upwards
- 2E15 ↗ UPWARDS ANCORA
• contrary to its formal name this symbol points downwards
- 2E16 ∠ DOTTED RIGHT-POINTING ANGLE
= diple periestigmene

Ancient Near-Eastern linguistic symbol

- 2E17 ≍ DOUBLE OBLIQUE HYPHEN
• used in ancient Near-Eastern linguistics
• hyphen in Fraktur text uses 002D - or 2010 -, but with a ‘ſ’ glyph in Fraktur fonts
→ 002D - hyphen-minus
→ 003D = equals sign
→ 2010 - hyphen

General punctuation

- 2E18 † INVERTED INTERROBANG
= gnaborretni
→ 203D † interrobang
- 2E19 # PALM BRANCH
• used as a separator

Dictionary punctuation

These punctuation marks are used mostly in German dictionaries, to indicate umlaut or case changes with abbreviated stems.

- 2E1A ¨ HYPHEN WITH DIAERESIS
• indicates umlaut of the stem vowel of a plural form
- 2E1B ̃ TILDE WITH RING ABOVE
• indicates change in case for derived form

Brackets

- 2E1C \ LEFT LOW PARAPHRASE BRACKET
- 2E1D / RIGHT LOW PARAPHRASE BRACKET
• used in N’Ko

Dictionary punctuation

- 2E1E ̇ TILDE WITH DOT ABOVE
• indicates derived form changes to uppercase
- 2E1F ̈ TILDE WITH DOT BELOW
• indicates derived form changes to lowercase

Brackets

- 2E20 † LEFT VERTICAL BAR WITH QUILL
- 2E21 ‡ RIGHT VERTICAL BAR WITH QUILL

Half brackets

These form a set of four corner brackets and are used editorially. They are distinguished from mathematical floor and ceiling characters. Occasionally quine corners are substituted for half brackets.

- 2E22 ∟ TOP LEFT HALF BRACKET
→ 2308 ∟ left ceiling
→ 231C ∟ top left corner
→ 300C ∟ left corner bracket
- 2E23 ∟ TOP RIGHT HALF BRACKET
- 2E24 ∟ BOTTOM LEFT HALF BRACKET
- 2E25 ∟ BOTTOM RIGHT HALF BRACKET

Brackets

- 2E26 ⊂ LEFT SIDEWAYS U BRACKET
→ 2282 ⊂ subset of
- 2E27 ⊃ RIGHT SIDEWAYS U BRACKET
→ 2283 ⊃ superset of
- 2E28 ((LEFT DOUBLE PARENTHESIS
→ 2985 (left white parenthesis
→ FF5F ((fullwidth left white parenthesis
- 2E29)) RIGHT DOUBLE PARENTHESIS

Historic punctuation

- 2E2A ∴ TWO DOTS OVER ONE DOT PUNCTUATION
- 2E2B ∷ ONE DOT OVER TWO DOTS PUNCTUATION
- 2E2C ∴ SQUARED FOUR DOT PUNCTUATION
- 2E2D ∴ FIVE DOT MARK
- 2E2E † REVERSED QUESTION MARK
= punctus percontativus
→ 003F † question mark
→ 00BF † inverted question mark
→ 061F † arabic question mark
- 2E2F † VERTICAL TILDE
• used for Cyrillic yerik
→ 033E † combining vertical tilde
→ A67F † cyrillic payerok

- 2E30 ◦ RING POINT
- used in Avestan
 - 2218 ◦ ring operator
 - 25E6 ◦ white bullet
- 2E31 · WORD SEPARATOR MIDDLE DOT
- used in Avestan, Samaritan, ...
 - 00B7 · middle dot

Palaeotype transliteration symbol

- 2E32 ˘ TURNED COMMA
- indicates nasalization
 - 060C ˘ arabic comma



Historic punctuation

- 2E33 ˙ RAISED DOT
- glyph position intermediate between 002E ˙ and 00B7 ·
 - 002E ˙ full stop
 - 00B7 · middle dot
- 2E34 ˆ RAISED COMMA
- 002C ˆ comma

Palaeotype transliteration symbols

- 2E35 ˆ TURNED SEMICOLON
- indicates sudden glottal closure
 - 061B ˆ arabic semicolon
- 2E36 † DAGGER WITH LEFT GUARD
- indicates retracted pronunciation
- 2E37 ‡ DAGGER WITH RIGHT GUARD
- indicates advanced pronunciation
- 2E38 † TURNED DAGGER
- indicates retroflex pronunciation
 - 2020 † dagger
- 2E39 § TOP HALF SECTION SIGN
- indicates pronunciation on one side of the mouth only
 - 00A7 § section sign

Dashes

- 2E3A  TWO-EM DASH
- = omission dash
 - 2014 — em dash
- 2E3B  THREE-EM DASH

Alternate Punctuation

- 2E3C ∙ STENOGRAPHIC FULL STOP
- used in shorthands and stenographies
 - 002E ˙ full stop
- 2E3D ∴ VERTICAL SIX DOTS
- 205E ∴ vertical four dots
 - 2999 ∴ dotted fence
- 2E3E 〰 WIGGLY VERTICAL LINE
- 2307 〰 wavy line
 - 299A 〰 vertical zigzag line

Historic punctuation

- 2E3F ¶ CAPITULUM
- ancestor of the pilcrow sign
 - 00B6 ¶ pilcrow sign

Hyphen

- 2E40 = DOUBLE HYPHEN
- 2010 - hyphen
 - 2E17 ≠ double oblique hyphen
 - 30A0 = katakana-hiragana double hyphen
 - 003D = equals sign
 - A78A = modifier letter short equals sign
 - used in transcription of old German prints and handwriting
 - used in some non-standard punctuation
 - not intended for standard hyphens where the duplication is only a font variant

Reversed punctuation

- 2E41 ˘ REVERSED COMMA
- 2E42 ˙˙ DOUBLE LOW-REVERSED-9 QUOTATION MARK

| | A64 | A65 | A66 | A67 | A68 | A69 |
|---|-----------|------------|-----------|-----------|------------|--|
| 0 | Џ A640 | Ы A650 | Ц A660 | ⦿ A670 | Д A680 | Т A690 |
| 1 | џ A641 | ы A651 | ц A661 | ⦿ A671 | д A681 | т A691 |
| 2 | Ѻ A642 | Ѣ A652 | Д A662 | ⦿ A672 | Ѕ A682 | Ѵ A692 |
| 3 | ѻ A643 | ѣ A653 | д A663 | ☆ A673 | ѕ A683 | ѵ A693 |
| 4 | Ѳ A644 | Ѧ A654 | Л A664 | ε A674 | ЗК A684 | Һ A694 |
| 5 | ѳ A645 | ѧ A655 | л A665 | и A675 | зк A685 | һ A695 |
| 6 | І A646 | ѦА A656 | М A666 | ï A676 | Ѵ A686 | Ѵ A696 |
| 7 | і A647 | ѧа A657 | м A667 | у A677 | ѵ A687 | ѵ A697 |
| 8 | Ӏ A648 | А A658 | ⊙ A668 | Ъ A678 | Д₃ A688 | ∞ A698 |
| 9 | Ӂ A649 | А A659 | ⊙ A669 | Ы A679 | Д₃ A689 | ∞ A699 |
| A | ӂ A64A | Ӄ A65A | ⊙ A66A | Ь A67A | Т₃ A68A | ⊕ A69A |
| B | ӄ A64B | Ӆ A65B | ⊙ A66B | Ѱ A67B | Т₃ A68B | ⊕ A69B |
| C | ӆ A64C | ӦА A65C | ∞ A66C | ⌒ A67C | Т A68C | Ъ A69C |
| D | Ӈ A64D | ӦА A65D | ∞ A66D | ѱ A67D | т A68D | Ъ A69D |
| E | ӈ A64E | ӦА A65E | ∞ A66E | ⌒ A67E | Ӧ A68E |  |
| F | Ӊ A64F | ӦА A65F | ∞ A66F | ч A67F | Ӧ A68F | Ӧ A69F |

Letters for Old Cyrillic

| | | |
|------|---|---|
| A640 | ⱪ | CYRILLIC CAPITAL LETTER ZEMLYA |
| A641 | Ⱬ | CYRILLIC SMALL LETTER ZEMLYA → 0437 з cyrillic small letter ze |
| A642 | ⱬ | CYRILLIC CAPITAL LETTER DZELO |
| A643 | Ɑ | CYRILLIC SMALL LETTER DZELO → 0455 с cyrillic small letter dze |
| A644 | Ɱ | CYRILLIC CAPITAL LETTER REVERSED DZE → 10193 Ɱ roman sextula sign |
| A645 | Ɐ | CYRILLIC SMALL LETTER REVERSED DZE |
| A646 | Ɒ | CYRILLIC CAPITAL LETTER IOTA |
| A647 | ⱱ | CYRILLIC SMALL LETTER IOTA → 2C3A ⱱ glagolitic small letter initial izhe |
| A648 | Ⱳ | CYRILLIC CAPITAL LETTER DJERV |
| A649 | ⱳ | CYRILLIC SMALL LETTER DJERV → 0452 ⱳ cyrillic small letter dje → 045B ⱳ cyrillic small letter tshe |
| A64A | ⱴ | CYRILLIC CAPITAL LETTER MONOGRAPH UK |
| A64B | Ⱶ | CYRILLIC SMALL LETTER MONOGRAPH UK → 0443 у cyrillic small letter u |
| A64C | ⱶ | CYRILLIC CAPITAL LETTER BROAD OMEGA |
| A64D | ⱷ | CYRILLIC SMALL LETTER BROAD OMEGA → 0461 ω cyrillic small letter omega |
| A64E | ⱸ | CYRILLIC CAPITAL LETTER NEUTRAL YER |
| A64F | ⱹ | CYRILLIC SMALL LETTER NEUTRAL YER → 044A ъ cyrillic small letter hard sign → 044C ѣ cyrillic small letter soft sign |
| A650 | ⱺ | CYRILLIC CAPITAL LETTER YERU WITH BACK YER |
| A651 | ⱻ | CYRILLIC SMALL LETTER YERU WITH BACK YER → 044B ѣ cyrillic small letter yeru |
| A652 | ⱼ | CYRILLIC CAPITAL LETTER IOTIFIED YAT |
| A653 | ⱽ | CYRILLIC SMALL LETTER IOTIFIED YAT → 0463 ѣ cyrillic small letter yat |
| A654 | Ȿ | CYRILLIC CAPITAL LETTER REVERSED YU |
| A655 | Ɀ | CYRILLIC SMALL LETTER REVERSED YU → 044E ю cyrillic small letter yu |
| A656 | ⱽ | CYRILLIC CAPITAL LETTER IOTIFIED A |
| A657 | Ɀ | CYRILLIC SMALL LETTER IOTIFIED A |
| A658 | Ȿ | CYRILLIC CAPITAL LETTER CLOSED LITTLE YUS |
| A659 | Ɀ | CYRILLIC SMALL LETTER CLOSED LITTLE YUS → 0467 Ѧ cyrillic small letter little yus |
| A65A | ⱽ | CYRILLIC CAPITAL LETTER BLENDED YUS |
| A65B | Ɀ | CYRILLIC SMALL LETTER BLENDED YUS → 0467 Ѧ cyrillic small letter little yus → 046B Ѧ cyrillic small letter big yus |
| A65C | ⱽ | CYRILLIC CAPITAL LETTER IOTIFIED CLOSED LITTLE YUS |
| A65D | Ɀ | CYRILLIC SMALL LETTER IOTIFIED CLOSED LITTLE YUS → 0469 Ѧ cyrillic small letter iotified little yus |
| A65E | ⱽ | CYRILLIC CAPITAL LETTER YN |
| A65F | Ɀ | CYRILLIC SMALL LETTER YN • Romanian Cyrillic |
| A660 | ⱽ | CYRILLIC CAPITAL LETTER REVERSED TSE |
| A661 | Ɀ | CYRILLIC SMALL LETTER REVERSED TSE |
| A662 | ⱽ | CYRILLIC CAPITAL LETTER SOFT DE |
| A663 | Ɀ | CYRILLIC SMALL LETTER SOFT DE |
| A664 | ⱽ | CYRILLIC CAPITAL LETTER SOFT EL |
| A665 | Ɀ | CYRILLIC SMALL LETTER SOFT EL |
| A666 | ⱽ | CYRILLIC CAPITAL LETTER SOFT EM |
| A667 | Ɀ | CYRILLIC SMALL LETTER SOFT EM |

| | | |
|------|---|---|
| A668 | ⱽ | CYRILLIC CAPITAL LETTER MONOCULAR O |
| A669 | Ɀ | CYRILLIC SMALL LETTER MONOCULAR O • used in words based on the root for 'eye' |
| A66A | ⱽ | CYRILLIC CAPITAL LETTER BINOCULAR O |
| A66B | Ɀ | CYRILLIC SMALL LETTER BINOCULAR O • used in the dual of words based on the root for 'eye' |
| A66C | ⱽ | CYRILLIC CAPITAL LETTER DOUBLE MONOCULAR O |
| A66D | Ɀ | CYRILLIC SMALL LETTER DOUBLE MONOCULAR O • used in the dual of words based on the root for 'eye' |
| A66E | ⱽ | CYRILLIC LETTER MULTIOCLULAR O • used in the epithet 'many-eyed' |

Abbreviation mark

| | | |
|------|---|--|
| A66F | ⱽ | COMBINING CYRILLIC VZMET • used with Cyrillic letters to indicate abbreviation → 0483 ⱽ combining cyrillic titlo → 0487 ⱽ combining cyrillic pokrytie |
|------|---|--|

Combining numeric signs

| | | |
|------|---|---|
| A670 | ⱽ | COMBINING CYRILLIC TEN MILLIONS SIGN → 0489 ⱽ combining cyrillic millions sign |
| A671 | ⱽ | COMBINING CYRILLIC HUNDRED MILLIONS SIGN |
| A672 | ⱽ | COMBINING CYRILLIC THOUSAND MILLIONS SIGN |

Punctuation mark

| | | |
|------|---|-------------------|
| A673 | ⱽ | SLAVONIC ASTERISK |
|------|---|-------------------|

Combining marks for Old Cyrillic

| | | |
|------|---|---|
| A674 | ⱽ | COMBINING CYRILLIC LETTER UKRAINIAN IE |
| A675 | ⱽ | COMBINING CYRILLIC LETTER I |
| A676 | ⱽ | COMBINING CYRILLIC LETTER YI |
| A677 | ⱽ | COMBINING CYRILLIC LETTER U |
| A678 | ⱽ | COMBINING CYRILLIC LETTER HARD SIGN |
| A679 | ⱽ | COMBINING CYRILLIC LETTER YERU |
| A67A | ⱽ | COMBINING CYRILLIC LETTER SOFT SIGN |
| A67B | ⱽ | COMBINING CYRILLIC LETTER OMEGA |
| A67C | ⱽ | COMBINING CYRILLIC KAVYKA • indicates an alternative reading to part of a word → 0306 ⱽ combining breve |
| A67D | ⱽ | COMBINING CYRILLIC PAYEROK • may indicate an omitted yer → 033E ⱽ combining vertical tilde |

Punctuation mark

| | | |
|------|---|---|
| A67E | ⱽ | CYRILLIC KAVYKA • used to mark off word that has alternative reading |
|------|---|---|

Modifier letter

| | | |
|------|---|--|
| A67F | ⱽ | CYRILLIC PAYEROK • may indicate an omitted yer → 2E2F ⱽ vertical tilde |
|------|---|--|

Letters for Old Abkhasian orthography

| | | |
|------|---|------------------------------|
| A680 | ⱽ | CYRILLIC CAPITAL LETTER DWE |
| A681 | ⱽ | CYRILLIC SMALL LETTER DWE |
| A682 | ⱽ | CYRILLIC CAPITAL LETTER DZWE |
| A683 | ⱽ | CYRILLIC SMALL LETTER DZWE |
| A684 | ⱽ | CYRILLIC CAPITAL LETTER ZHWE |

| | | |
|------|---|---|
| A685 | Ѡ | CYRILLIC SMALL LETTER ZHWE |
| A686 | ѡ | CYRILLIC CAPITAL LETTER CCHE |
| A687 | Ѣ | CYRILLIC SMALL LETTER CCHE |
| A688 | Ѥ | CYRILLIC CAPITAL LETTER DZZE |
| A689 | ѥ | CYRILLIC SMALL LETTER DZZE |
| A68A | Ѧ | CYRILLIC CAPITAL LETTER TE WITH MIDDLE HOOK |
| A68B | ѧ | CYRILLIC SMALL LETTER TE WITH MIDDLE HOOK |
| A68C | Ѩ | CYRILLIC CAPITAL LETTER TWE |
| A68D | ѩ | CYRILLIC SMALL LETTER TWE |
| A68E | Ѫ | CYRILLIC CAPITAL LETTER TSWE |
| A68F | ѫ | CYRILLIC SMALL LETTER TSWE |
| A690 | Ѭ | CYRILLIC CAPITAL LETTER TSSE |
| A691 | ѭ | CYRILLIC SMALL LETTER TSSE |
| A692 | Ѯ | CYRILLIC CAPITAL LETTER TCHE |
| A693 | ѯ | CYRILLIC SMALL LETTER TCHE |
| A694 | Ѱ | CYRILLIC CAPITAL LETTER HWE |
| A695 | ѱ | CYRILLIC SMALL LETTER HWE |
| A696 | Ѳ | CYRILLIC CAPITAL LETTER SHWE |
| A697 | ѳ | CYRILLIC SMALL LETTER SHWE |

Letters for Early Slavonic

| | | |
|------|---|-----------------------------------|
| A698 | Ѵ | CYRILLIC CAPITAL LETTER DOUBLE O |
| A699 | ѵ | CYRILLIC SMALL LETTER DOUBLE O |
| A69A | Ѷ | CYRILLIC CAPITAL LETTER CROSSED O |
| A69B | ѷ | CYRILLIC SMALL LETTER CROSSED O |

Intonation marks for Lithuanian dialectology

| | | |
|------|---|---|
| A69C | Ѹ | MODIFIER LETTER CYRILLIC HARD SIGN ≈ <sup>044A Ѹ |
| A69D | ѹ | MODIFIER LETTER CYRILLIC SOFT SIGN ≈ <sup>044C ѹ |

Combining mark for Old Cyrillic

| | | |
|------|---|--------------------------------------|
| A69F | Ѻ | COMBINING CYRILLIC LETTER IOTIFIED E |
|------|---|--------------------------------------|

| | A72 | A73 | A74 | A75 | A76 | A77 | A78 | A79 | A7A | A7B | A7C | A7D | A7E | A7F |
|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----|-----|-----|-----|-----------|
| 0 | Ƒ A720 | F A730 | Ƒ A740 | Ƒ A750 | Ƒ A760 | Ƒ A770 | Ƒ A780 | Ƒ A790 | Ƒ A7A0 | | | | | |
| 1 | Ƒ A721 | s A731 | Ƒ A741 | Ƒ A751 | Ƒ A761 | Ƒ A771 | Ƒ A781 | Ƒ A791 | Ƒ A7A1 | | | | | |
| 2 | Ƒ A722 | Ƒ A732 | Ƒ A742 | Ƒ A752 | Ƒ A762 | Ƒ A772 | Ƒ A782 | Ƒ A792 | Ƒ A7A2 | | | | | |
| 3 | Ƒ A723 | Ƒ A733 | Ƒ A743 | Ƒ A753 | Ƒ A763 | Ƒ A773 | Ƒ A783 | Ƒ A793 | Ƒ A7A3 | | | | | |
| 4 | Ƒ A724 | Ƒ A734 | Ƒ A744 | Ƒ A754 | Ƒ A764 | Ƒ A774 | Ƒ A784 | Ƒ A794 | Ƒ A7A4 | | | | | |
| 5 | Ƒ A725 | Ƒ A735 | Ƒ A745 | Ƒ A755 | Ƒ A765 | Ƒ A775 | Ƒ A785 | Ƒ A795 | Ƒ A7A5 | | | | | |
| 6 | Ƒ A726 | Ƒ A736 | Ƒ A746 | Ƒ A756 | Ƒ A766 | Ƒ A776 | Ƒ A786 | | Ƒ A7A6 | | | | | |
| 7 | Ƒ A727 | Ƒ A737 | Ƒ A747 | Ƒ A757 | Ƒ A767 | Ƒ A777 | Ƒ A787 | | Ƒ A7A7 | | | | | |
| 8 | Ƒ A728 | Ƒ A738 | Ƒ A748 | Ƒ A758 | Ƒ A768 | Ƒ A778 | Ƒ A788 | Ƒ A798 | Ƒ A7A8 | | | | | Ƒ A7F8 |
| 9 | Ƒ A729 | Ƒ A739 | Ƒ A749 | Ƒ A759 | Ƒ A769 | Ƒ A779 | Ƒ A789 | Ƒ A799 | Ƒ A7A9 | | | | | Ƒ A7F9 |
| A | Ƒ A72A | Ƒ A73A | Ƒ A74A | Ƒ A75A | Ƒ A76A | Ƒ A77A | Ƒ A78A | Ƒ A79A | Ƒ A7AA | | | | | Ƒ A7FA |
| B | Ƒ A72B | Ƒ A73B | Ƒ A74B | Ƒ A75B | Ƒ A76B | Ƒ A77B | Ƒ A78B | Ƒ A79B | | | | | | Ƒ A7FB |
| C | Ƒ A72C | Ƒ A73C | Ƒ A74C | Ƒ A75C | Ƒ A76C | Ƒ A77C | Ƒ A78C | Ƒ A79C | | | | | | Ƒ A7FC |
| D | Ƒ A72D | Ƒ A73D | Ƒ A74D | Ƒ A75D | Ƒ A76D | Ƒ A77D | Ƒ A78D | Ƒ A79D | | | | | | Ƒ A7FD |
| E | Ƒ A72E | Ƒ A73E | Ƒ A74E | Ƒ A75E | Ƒ A76E | Ƒ A77E | Ƒ A78E | Ƒ A79E | | | | | | Ƒ A7FE |
| F | Ƒ A72F | Ƒ A73F | Ƒ A74F | Ƒ A75F | Ƒ A76F | Ƒ A77F | | Ƒ A79F | | | | | | Ƒ A7FF |

Additions for UPA

- A720 𐀀 MODIFIER LETTER STRESS AND HIGH TONE
 A721 𐀁 MODIFIER LETTER STRESS AND LOW TONE

Egyptological additions

- A722 𐀂 LATIN CAPITAL LETTER EGYPTOLOGICAL ALEF
 A723 𐀃 LATIN SMALL LETTER EGYPTOLOGICAL ALEF
 A724 𐀄 LATIN CAPITAL LETTER EGYPTOLOGICAL AIN
 A725 𐀅 LATIN SMALL LETTER EGYPTOLOGICAL AIN
 • this is a case pair
 → 1D25 𐀆 latin letter ain
 → 1D5C 𐀇 modifier letter small ain

Mayanist additions

- A726 𐀈 LATIN CAPITAL LETTER HENG
 A727 𐀉 LATIN SMALL LETTER HENG
 A728 𐀊 LATIN CAPITAL LETTER TZ
 A729 𐀋 LATIN SMALL LETTER TZ
 A72A 𐀌 LATIN CAPITAL LETTER TRESILLO
 A72B 𐀍 LATIN SMALL LETTER TRESILLO
 A72C 𐀎 LATIN CAPITAL LETTER CUATRILLO
 A72D 𐀏 LATIN SMALL LETTER CUATRILLO
 A72E 𐀐 LATIN CAPITAL LETTER CUATRILLO WITH COMMA
 A72F 𐀑 LATIN SMALL LETTER CUATRILLO WITH COMMA

Medievalist additions

- A730 𐀒 LATIN LETTER SMALL CAPITAL F
 A731 𐀓 LATIN LETTER SMALL CAPITAL S
 A732 𐀔 LATIN CAPITAL LETTER AA
 A733 𐀕 LATIN SMALL LETTER AA
 A734 𐀖 LATIN CAPITAL LETTER AO
 A735 𐀗 LATIN SMALL LETTER AO
 A736 𐀘 LATIN CAPITAL LETTER AU
 A737 𐀙 LATIN SMALL LETTER AU
 A738 𐀚 LATIN CAPITAL LETTER AV
 A739 𐀛 LATIN SMALL LETTER AV
 A73A 𐀜 LATIN CAPITAL LETTER AV WITH HORIZONTAL BAR
 A73B 𐀝 LATIN SMALL LETTER AV WITH HORIZONTAL BAR
 A73C 𐀞 LATIN CAPITAL LETTER AY
 A73D 𐀟 LATIN SMALL LETTER AY
 A73E 𐀠 LATIN CAPITAL LETTER REVERSED C WITH DOT
 A73F 𐀡 LATIN SMALL LETTER REVERSED C WITH DOT
 A740 𐀢 LATIN CAPITAL LETTER K WITH STROKE
 A741 𐀣 LATIN SMALL LETTER K WITH STROKE
 A742 𐀤 LATIN CAPITAL LETTER K WITH DIAGONAL STROKE
 A743 𐀥 LATIN SMALL LETTER K WITH DIAGONAL STROKE
 A744 𐀦 LATIN CAPITAL LETTER K WITH STROKE AND DIAGONAL STROKE
 A745 𐀧 LATIN SMALL LETTER K WITH STROKE AND DIAGONAL STROKE
 A746 𐀨 LATIN CAPITAL LETTER BROKEN L
 A747 𐀩 LATIN SMALL LETTER BROKEN L
 A748 𐀪 LATIN CAPITAL LETTER L WITH HIGH STROKE
 A749 𐀫 LATIN SMALL LETTER L WITH HIGH STROKE
 A74A 𐀬 LATIN CAPITAL LETTER O WITH LONG STROKE OVERLAY
 A74B 𐀭 LATIN SMALL LETTER O WITH LONG STROKE OVERLAY

- A74C 𐀮 LATIN CAPITAL LETTER O WITH LOOP
 A74D 𐀯 LATIN SMALL LETTER O WITH LOOP
 A74E 𐀰 LATIN CAPITAL LETTER OO
 A74F 𐀱 LATIN SMALL LETTER OO
 A750 𐀲 LATIN CAPITAL LETTER P WITH STROKE THROUGH DESCENDER
 A751 𐀳 LATIN SMALL LETTER P WITH STROKE THROUGH DESCENDER
 A752 𐀴 LATIN CAPITAL LETTER P WITH FLOURISH
 A753 𐀵 LATIN SMALL LETTER P WITH FLOURISH
 A754 𐀶 LATIN CAPITAL LETTER P WITH SQUIRREL TAIL
 A755 𐀷 LATIN SMALL LETTER P WITH SQUIRREL TAIL
 A756 𐀸 LATIN CAPITAL LETTER Q WITH STROKE THROUGH DESCENDER
 A757 𐀹 LATIN SMALL LETTER Q WITH STROKE THROUGH DESCENDER
 A758 𐀺 LATIN CAPITAL LETTER Q WITH DIAGONAL STROKE
 A759 𐀻 LATIN SMALL LETTER Q WITH DIAGONAL STROKE
 A75A 𐀼 LATIN CAPITAL LETTER R ROTUNDA
 A75B 𐀽 LATIN SMALL LETTER R ROTUNDA
 A75C 𐀾 LATIN CAPITAL LETTER RUM ROTUNDA
 A75D 𐀿 LATIN SMALL LETTER RUM ROTUNDA
 A75E 𐁀 LATIN CAPITAL LETTER V WITH DIAGONAL STROKE
 A75F 𐁁 LATIN SMALL LETTER V WITH DIAGONAL STROKE
 A760 𐁂 LATIN CAPITAL LETTER VY
 A761 𐁃 LATIN SMALL LETTER VY
 A762 𐁄 LATIN CAPITAL LETTER VISIGOTHIC Z
 A763 𐁅 LATIN SMALL LETTER VISIGOTHIC Z
 A764 𐁆 LATIN CAPITAL LETTER THORN WITH STROKE
 A765 𐁇 LATIN SMALL LETTER THORN WITH STROKE
 A766 𐁈 LATIN CAPITAL LETTER THORN WITH STROKE THROUGH DESCENDER
 A767 𐁉 LATIN SMALL LETTER THORN WITH STROKE THROUGH DESCENDER
 A768 𐁊 LATIN CAPITAL LETTER VEND
 A769 𐁋 LATIN SMALL LETTER VEND
 A76A 𐁌 LATIN CAPITAL LETTER ET
 A76B 𐁍 LATIN SMALL LETTER ET
 A76C 𐁎 LATIN CAPITAL LETTER IS
 A76D 𐁏 LATIN SMALL LETTER IS
 A76E 𐁐 LATIN CAPITAL LETTER CON
 A76F 𐁑 LATIN SMALL LETTER CON
 A770 𐁒 MODIFIER LETTER US
 ≈ <super> A76F 9
 A771 𐁓 LATIN SMALL LETTER DUM
 A772 𐁔 LATIN SMALL LETTER LUM
 A773 𐁕 LATIN SMALL LETTER MUM
 A774 𐁖 LATIN SMALL LETTER NUM
 A775 𐁗 LATIN SMALL LETTER RUM
 A776 𐁘 LATIN LETTER SMALL CAPITAL RUM
 A777 𐁙 LATIN SMALL LETTER TUM
 A778 𐁚 LATIN SMALL LETTER UM

Insular and Celticist letters

- A779 𐁛 LATIN CAPITAL LETTER INSULAR D
 A77A 𐁜 LATIN SMALL LETTER INSULAR D
 A77B 𐁝 LATIN CAPITAL LETTER INSULAR F
 A77C 𐁞 LATIN SMALL LETTER INSULAR F
 A77D 𐁟 LATIN CAPITAL LETTER INSULAR G
 • lowercase is 1D79 𐁠

| | | |
|------|----|---------------------------------------|
| A77E | Ǫ | LATIN CAPITAL LETTER TURNED INSULAR G |
| A77F | ǫ | LATIN SMALL LETTER TURNED INSULAR G |
| A780 | ŀ | LATIN CAPITAL LETTER TURNED L |
| A781 | l̩ | LATIN SMALL LETTER TURNED L |
| A782 | ŕ | LATIN CAPITAL LETTER INSULAR R |
| A783 | r̩ | LATIN SMALL LETTER INSULAR R |
| A784 | ſ̣ | LATIN CAPITAL LETTER INSULAR S |
| A785 | ṣ | LATIN SMALL LETTER INSULAR S |
| A786 | Ɔ | LATIN CAPITAL LETTER INSULAR T |
| A787 | Ɵ | LATIN SMALL LETTER INSULAR T |

Modifier letters

| | | |
|------|---|--|
| A788 | ˘ | MODIFIER LETTER LOW CIRCUMFLEX ACCENT → 02C6 ˘ modifier letter circumflex accent → 2038 ˘ caret |
| A789 | : | MODIFIER LETTER COLON • used as a tone letter in some orthographies • Budu (Congo), Sabaot (Kenya), and several Papua New Guinea languages → 003A : colon |
| A78A | = | MODIFIER LETTER SHORT EQUALS SIGN • used as a tone letter in some orthographies • Budu (Congo) → 003D = equals sign |

Orthographic letters for glottals

| | | |
|------|---|--|
| A78B | ʼ | LATIN CAPITAL LETTER SALTILLO • Me'phaa (Mexico) |
| A78C | ʻ | LATIN SMALL LETTER SALTILLO • saltillos are used as a casing pair for glottal stop in some orthographies • the lowercase is widely used in many languages in Mexico and other regions, including Izere in Nigeria → 0027 ʻ apostrophe → 0242 ʻ latin small letter glottal stop → 0294 ʻ latin letter glottal stop → 02BC ʻ modifier letter apostrophe → 02C0 ʻ modifier letter glottal stop |

Additional letter

| | | |
|------|---|--|
| A78D | ꞥ | LATIN CAPITAL LETTER TURNED H • used in the Dan/Gio orthography in Liberia • lowercase is 0265 ꞥ |
|------|---|--|

Phonetic symbol

| | | |
|------|----|---|
| A78E | ɬ̺ | LATIN SMALL LETTER L WITH RETROFLEX HOOK AND BELT • voiceless lateral retroflex fricative • used to transcribe Toda |
|------|----|---|

Additional letters

| | | |
|------|---|--|
| A790 | Ɔ | LATIN CAPITAL LETTER N WITH DESCENDER |
| A791 | ɳ | LATIN SMALL LETTER N WITH DESCENDER • Janalif |
| A792 | Ɔ | LATIN CAPITAL LETTER C WITH BAR = Cambrian symbol |
| A793 | ɸ | LATIN SMALL LETTER C WITH BAR • Nanai |

Additions for Lithuanian dialectology

| | | |
|------|---|--|
| A794 | ç | LATIN SMALL LETTER C WITH PALATAL HOOK |
| A795 | ħ | LATIN SMALL LETTER H WITH PALATAL HOOK → A727 ħ latin small letter heng |

Archaic letters for Ewe

| | | |
|------|---|------------------------------------|
| A798 | ƒ | LATIN CAPITAL LETTER F WITH STROKE |
|------|---|------------------------------------|

| | | |
|------|---|---|
| A799 | ƒ | LATIN SMALL LETTER F WITH STROKE • old Ewe orthography • also used in German dialectology |
|------|---|---|

Archaic letters for Volapük

| | | |
|------|---|---------------------------------|
| A79A | ƒ | LATIN CAPITAL LETTER VOLAPUK AE |
| A79B | ɸ | LATIN SMALL LETTER VOLAPUK AE |
| A79C | Ɔ | LATIN CAPITAL LETTER VOLAPUK OE |
| A79D | ɸ | LATIN SMALL LETTER VOLAPUK OE |
| A79E | ƒ | LATIN CAPITAL LETTER VOLAPUK UE |
| A79F | ɸ | LATIN SMALL LETTER VOLAPUK UE |

Latvian letters for pre-1921 orthography

| | | |
|------|---|--|
| A7A0 | Ģ | LATIN CAPITAL LETTER G WITH OBLIQUE STROKE |
| A7A1 | ģ | LATIN SMALL LETTER G WITH OBLIQUE STROKE |
| A7A2 | Ķ | LATIN CAPITAL LETTER K WITH OBLIQUE STROKE |
| A7A3 | ķ | LATIN SMALL LETTER K WITH OBLIQUE STROKE |
| A7A4 | Ņ | LATIN CAPITAL LETTER N WITH OBLIQUE STROKE |
| A7A5 | ņ | LATIN SMALL LETTER N WITH OBLIQUE STROKE |
| A7A6 | Ŗ | LATIN CAPITAL LETTER R WITH OBLIQUE STROKE |
| A7A7 | ŗ | LATIN SMALL LETTER R WITH OBLIQUE STROKE |
| A7A8 | Š | LATIN CAPITAL LETTER S WITH OBLIQUE STROKE |
| A7A9 | š | LATIN SMALL LETTER S WITH OBLIQUE STROKE • also used in pre-1950 Lower Sorbian orthography → 1E9C ƒ latin small letter long s with diagonal stroke |

Additional letter

| | | |
|------|---|---|
| A7AA | Ɔ | LATIN CAPITAL LETTER H WITH HOOK • lowercase is 0266 Ɔ • used in Chad |
|------|---|---|

Additions for Extended IPA

| | | |
|------|----|--|
| A7F8 | ʰ | MODIFIER LETTER CAPITAL H WITH STROKE • faucalized ≈ <super> 0126 ʰ |
| A7F9 | œ̟ | MODIFIER LETTER SMALL LIGATURE OE • labialized: open-rounded ≈ <super> 0153 œ̟ |

Addition for UPA

| | | |
|------|---|-------------------------------------|
| A7FA | ꞥ | LATIN LETTER SMALL CAPITAL TURNED M |
|------|---|-------------------------------------|

Ancient Roman epigraphic letters

| | | |
|------|---|------------------------------------|
| A7FB | Ɔ | LATIN EPIGRAPHIC LETTER REVERSED F |
| A7FC | Ɔ | LATIN EPIGRAPHIC LETTER REVERSED P |
| A7FD | Ɔ | LATIN EPIGRAPHIC LETTER INVERTED M |
| A7FE | Ɔ | LATIN EPIGRAPHIC LETTER I LONGA |
| A7FF | Ɔ | LATIN EPIGRAPHIC LETTER ARCHAIC M |

| | A9E | A9F |
|---|------------|-----|
| 0 | ၁ A9E0 | |
| 1 | ဃ A9E1 | |
| 2 | ၣ် A9E2 | |
| 3 | ၣ် A9E3 | |
| 4 | ၣ် A9E4 | |
| 5 | ၣ် A9E5 | |
| 6 | ၣ် A9E6 | |
| 7 | | |
| 8 | | |
| 9 | | |
| A | | |
| B | | |
| C | | |
| D | | |
| E | | |
| F | | |

Shan Pali consonants

| | | |
|------|----|-------------------------|
| A9E0 | ၁ | MYANMAR LETTER SHAN GHA |
| A9E1 | ဃ | MYANMAR LETTER SHAN CHA |
| A9E2 | ၣ် | MYANMAR LETTER SHAN JHA |
| A9E3 | ၣ် | MYANMAR LETTER SHAN NNA |
| A9E4 | ၣ် | MYANMAR LETTER SHAN BHA |

Combining mark

| | | |
|------|----|-----------------------|
| A9E5 | ၣ် | MYANMAR SIGN SHAN SAW |
|------|----|-----------------------|

Punctuation

| | | |
|------|----|--|
| A9E6 | ၣ် | MYANMAR MODIFIER LETTER SHAN REDUPLICATION → AA70 [*] myanmar modifier letter khamti reduplication |
|------|----|--|

















| | AB3 | AB4 | AB5 | AB6 | AB7 | AB8 | AB9 | ABA | ABB |
|---|-----------------|------------------|-----------------|-----|-----|-----|-----|-----|-----|
| 0 | Ⓔ AB30 | Ⓕ AB40 | Ⓖ AB50 | | | | | | |
| 1 | Ⓗ AB31 | Ⓖ AB41 | Ⓜ AB51 | | | | | | |
| 2 | Ⓝ AB32 | Ⓕ AB42 | Ⓤ AB52 | | | | | | |
| 3 | ⓔ AB33 | Ⓖ AB43 | ⓧ AB53 | | | | | | |
| 4 | ⓔ̇ AB34 | Ⓖ̇ AB44 | ⓧ̇ AB54 | | | | | | |
| 5 | Ⓣ AB35 | Ⓜ̇ AB45 | ⓧ̇ AB55 | | | | | | |
| 6 | ⓖ AB36 | Ⓡ AB46 | ⓧ̇ AB56 | | | | | | |
| 7 | Ⓣ̇ AB37 | Ⓡ̇ AB47 | ⓧ̇ AB57 | | | | | | |
| 8 | Ⓣ̇̇ AB38 | Ⓡ̇̇ AB48 | ⓧ̇̇ AB58 | | | | | | |
| 9 | Ⓣ̇̇̇ AB39 | Ⓡ̇̇̇ AB49 | ⓧ̇̇̇ AB59 | | | | | | |
| A | Ⓜ̇̇ AB3A | Ⓡ̇̇̇ AB4A | Ⓤ̇ AB5A | | | | | | |
| B | Ⓜ̇̇̇ AB3B | Ⓡ̇̇̇̇ AB4B | Ⓤ̇̇ AB5B | | | | | | |
| C | ⓖ̇ AB3C | Ⓡ̇̇ AB4C | Ⓤ̇̇̇ AB5C | | | | | | |
| D | Ⓜ̇̇̇̇ AB3D | Ⓡ̇̇̇̇̇ AB4D | Ⓤ̇̇̇̇ AB5D | | | | | | |
| E | Ⓜ̇̇̇̇̇ AB3E | Ⓡ̇̇̇̇̇̇ AB4E | Ⓤ̇̇̇̇̇ AB5E | | | | | | |
| F | Ⓜ̇̇̇̇̇̇ AB3F | Ⓡ̇̇̇̇̇̇̇ AB4F | Ⓤ̇̇̇̇̇̇ AB5F | | | | | | |

Letters for German dialectology







| | | |
|------|---|---|
| AB30 | Ɽ | LATIN SMALL LETTER BARRED ALPHA |
| AB31 | ⱥ | LATIN SMALL LETTER A REVERSED-SCHWA |
| AB32 | ⱦ | LATIN SMALL LETTER BLACKLETTER E |
| AB33 | Ⱨ | LATIN SMALL LETTER BARRED E |
| AB34 | ⱨ | LATIN SMALL LETTER E WITH FLOURISH |
| AB35 | ƒ | LATIN SMALL LETTER LENIS F → 0066 ƒ latin small letter f |
| AB36 | Ⱪ | LATIN SMALL LETTER SCRIPT G WITH CROSSED-TAIL |
| AB37 | ⱪ | LATIN SMALL LETTER L WITH INVERTED LAZY S |
| AB38 | ⱬ | LATIN SMALL LETTER L WITH DOUBLE MIDDLE TILDE |
| AB39 | Ɑ | LATIN SMALL LETTER L WITH MIDDLE RING |
| AB3A | Ɱ | LATIN SMALL LETTER M WITH CROSSED-TAIL |
| AB3B | Ɐ | LATIN SMALL LETTER N WITH CROSSED-TAIL |
| AB3C | Ɒ | LATIN SMALL LETTER ENG WITH CROSSED-TAIL |
| AB3D | ⱱ | LATIN SMALL LETTER BLACKLETTER O |
| AB3E | Ⱳ | LATIN SMALL LETTER BLACKLETTER O WITH STROKE |
| AB3F | ⱳ | LATIN SMALL LETTER OPEN O WITH STROKE |
| AB40 | ⱴ | LATIN SMALL LETTER INVERTED OE = latin small letter o reversed-schwa |
| AB41 | Ⱶ | LATIN SMALL LETTER TURNED OE WITH STROKE |
| AB42 | ⱶ | LATIN SMALL LETTER TURNED OE WITH HORIZONTAL STROKE |
| AB43 | ⱷ | LATIN SMALL LETTER TURNED O OPEN-O |
| AB44 | ⱸ | LATIN SMALL LETTER TURNED O OPEN-O WITH STROKE |
| AB45 | ⱹ | LATIN SMALL LETTER STIRRUP R |
| AB46 | ⱺ | LATIN LETTER SMALL CAPITAL R WITH RIGHT LEG |
| AB47 | ⱻ | LATIN SMALL LETTER R WITHOUT HANDLE |
| AB48 | ⱼ | LATIN SMALL LETTER DOUBLE R |
| AB49 | ⱽ | LATIN SMALL LETTER R WITH CROSSED-TAIL |
| AB4A | Ȿ | LATIN SMALL LETTER DOUBLE R WITH CROSSED-TAIL |
| AB4B | Ɀ | LATIN SMALL LETTER SCRIPT R |
| AB4C | Ⲁ | LATIN SMALL LETTER SCRIPT R WITH RING |
| AB4D | ⲁ | LATIN SMALL LETTER BASELINE ESH |
| AB4E | Ⲃ | LATIN SMALL LETTER U WITH SHORT RIGHT LEG |
| AB4F | ⲃ | LATIN SMALL LETTER U BAR WITH SHORT RIGHT LEG |
| AB50 | Ⲅ | LATIN SMALL LETTER UI |
| AB51 | ⲅ | LATIN SMALL LETTER TURNED UI |
| AB52 | Ⲇ | LATIN SMALL LETTER U WITH LEFT HOOK |
| AB53 | ⲇ | LATIN SMALL LETTER STRETCHED X → 03C7 ⲇ greek small letter chi |
| AB54 | Ⲉ | LATIN SMALL LETTER STRETCHED X WITH LOW RIGHT RING |
| AB55 | ⲉ | LATIN SMALL LETTER STRETCHED X WITH LOW LEFT SERIF |
| AB56 | Ⲋ | LATIN SMALL LETTER X WITH LOW RIGHT RING |
| AB57 | ⲋ | LATIN SMALL LETTER X WITH LONG LEFT LEG |
| AB58 | Ⲍ | LATIN SMALL LETTER X WITH LONG LEFT LEG AND LOW RIGHT RING |
| AB59 | ⲍ | LATIN SMALL LETTER X WITH LONG LEFT LEG WITH SERIF |
| AB5A | Ⲏ | LATIN SMALL LETTER Y WITH SHORT RIGHT LEG |

Modifier letters for German dialectology

| | | |
|------|---|---|
| AB5B | Ɀ | MODIFIER BREVE WITH INVERTED BREVE |
| AB5C | ⲏ | MODIFIER LETTER SMALL HENG |
| AB5D | Ⲑ | MODIFIER LETTER SMALL L WITH INVERTED LAZY S |
| AB5E | ⲑ | MODIFIER LETTER SMALL L WITH MIDDLE TILDE |
| AB5F | Ⲓ | MODIFIER LETTER SMALL U WITH LEFT HOOK |






| | FE2 |
|---|--|
| 0 |  FE20 |
| 1 |  FE21 |
| 2 |  FE22 |
| 3 |  FE23 |
| 4 |  FE24 |
| 5 |  FE25 |
| 6 |  FE26 |
| 7 |  FE27 |
| 8 |  FE28 |
| 9 |  FE29 |
| A |  FE2A |
| B |  FE2B |
| C |  FE2C |
| D |  FE2D |
| E |  |
| F |  |

Combining half marks

- FE20  COMBINING LIGATURE LEFT HALF
 FE21  COMBINING LIGATURE RIGHT HALF
 → 0361  combining double inverted breve
 FE22  COMBINING DOUBLE TILDE LEFT HALF
 FE23  COMBINING DOUBLE TILDE RIGHT HALF
 → 0360  combining double tilde









Continuous macrons for Coptic

































These are used in combinations to represent continuous macrons over a sequence of Coptic letters.

- FE24  COMBINING MACRON LEFT HALF
 FE25  COMBINING MACRON RIGHT HALF
 FE26  COMBINING CONJOINING MACRON
 → 0304  combining macron
 → 035E  combining double macron


Combining half marks below

These are used in combinations to represent ligature, tilde, and macron that extend below more than two characters










- FE27  COMBINING LIGATURE LEFT HALF BELOW
 FE28  COMBINING LIGATURE RIGHT HALF BELOW
 → 035C  combining double breve below
 FE29  COMBINING TILDE LEFT HALF BELOW
 FE2A  COMBINING TILDE RIGHT HALF BELOW
 FE2B  COMBINING MACRON LEFT HALF BELOW
 FE2C  COMBINING MACRON RIGHT HALF BELOW
 FE2D  COMBINING CONJOINING MACRON BELOW

| | 102E | 102F |
|---|--|--|
| 0 |  102E0 |  102F0 |
| 1 |  102E1 |  102F1 |
| 2 |  102E2 |  102F2 |
| 3 |  102E3 |  102F3 |
| 4 |  102E4 |  102F4 |
| 5 |  102E5 |  102F5 |
| 6 |  102E6 |  102F6 |
| 7 |  102E7 |  102F7 |
| 8 |  102E8 |  102F8 |
| 9 |  102E9 |  102F9 |
| A |  102EA |  102FA |
| B |  102EB |  102FB |
| C |  102EC |  |
| D |  102ED |  |
| E |  102EE |  |
| F |  102EF |  |



















Sign

102E0  COPTIC EPACT THOUSANDS MARK

Digits

- 102E1  COPTIC EPACT DIGIT ONE
- 102E2  COPTIC EPACT DIGIT TWO
- 102E3  COPTIC EPACT DIGIT THREE
- 102E4  COPTIC EPACT DIGIT FOUR
- 102E5  COPTIC EPACT DIGIT FIVE
- 102E6  COPTIC EPACT DIGIT SIX
- 102E7  COPTIC EPACT DIGIT SEVEN
- 102E8  COPTIC EPACT DIGIT EIGHT
- 102E9  COPTIC EPACT DIGIT NINE

Numbers

- 102EA  COPTIC EPACT NUMBER TEN
- 102EB  COPTIC EPACT NUMBER TWENTY
- 102EC  COPTIC EPACT NUMBER THIRTY
- 102ED  COPTIC EPACT NUMBER FORTY
- 102EE  COPTIC EPACT NUMBER FIFTY
- 102EF  COPTIC EPACT NUMBER SIXTY
- 102F0  COPTIC EPACT NUMBER SEVENTY
- 102F1  COPTIC EPACT NUMBER EIGHTY
- 102F2  COPTIC EPACT NUMBER NINETY
- 102F3  COPTIC EPACT NUMBER ONE HUNDRED
- 102F4  COPTIC EPACT NUMBER TWO HUNDRED
- 102F5  COPTIC EPACT NUMBER THREE HUNDRED
- 102F6  COPTIC EPACT NUMBER FOUR HUNDRED
- 102F7  COPTIC EPACT NUMBER FIVE HUNDRED
- 102F8  COPTIC EPACT NUMBER SIX HUNDRED
- 102F9  COPTIC EPACT NUMBER SEVEN HUNDRED
- 102FA  COPTIC EPACT NUMBER EIGHT HUNDRED
- 102FB  COPTIC EPACT NUMBER NINE HUNDRED

| | 1030 | 1031 | 1032 |
|---|------------|------------|------------|
| 0 | 𐌱 10300 | 𐌲 10310 | 𐌳 10320 |
| 1 | 𐌴 10301 | 𐌵 10311 | 𐌶 10321 |
| 2 | 𐌷 10302 | 𐌸 10312 | 𐌹 10322 |
| 3 | 𐌺 10303 | 𐌻 10313 | 𐌼 10323 |
| 4 | 𐌽 10304 | 𐌾 10314 | |
| 5 | 𐌿 10305 | 𐍀 10315 | |
| 6 | 𐍁 10306 | 𐍂 10316 | |
| 7 | 𐍃 10307 | 𐍄 10317 | |
| 8 | 𐍅 10308 | 𐍆 10318 | |
| 9 | 𐍇 10309 | 𐍈 10319 | |
| A | 𐍉 1030A | 𐍊 1031A | |
| B | 𐍋 1030B | 𐍌 1031B | |
| C | 𐍍 1030C | 𐍎 1031C | |
| D | 𐍏 1030D | 𐍐 1031D | |
| E | 𐍑 1030E | 𐍒 1031E | |
| F | 𐍓 1030F | 𐍔 1031F | |

Letters

| | | |
|-------|---|-----------------------|
| 10300 | 𐌱 | OLD ITALIC LETTER A |
| 10301 | 𐌴 | OLD ITALIC LETTER BE |
| 10302 | 𐌷 | OLD ITALIC LETTER KE |
| 10303 | 𐌺 | OLD ITALIC LETTER DE |
| 10304 | 𐌽 | OLD ITALIC LETTER E |
| 10305 | 𐌿 | OLD ITALIC LETTER VE |
| 10306 | 𐍁 | OLD ITALIC LETTER ZE |
| 10307 | 𐍃 | OLD ITALIC LETTER HE |
| 10308 | 𐍅 | OLD ITALIC LETTER THE |
| 10309 | 𐍇 | OLD ITALIC LETTER I |
| 1030A | 𐍉 | OLD ITALIC LETTER KA |
| 1030B | 𐍋 | OLD ITALIC LETTER EL |
| 1030C | 𐍍 | OLD ITALIC LETTER EM |
| 1030D | 𐍏 | OLD ITALIC LETTER EN |
| 1030E | 𐍑 | OLD ITALIC LETTER ESH |
| 1030F | 𐍓 | OLD ITALIC LETTER O |
| | | • Faliscan |
| 10310 | 𐌲 | OLD ITALIC LETTER PE |
| 10311 | 𐌵 | OLD ITALIC LETTER SHE |
| 10312 | 𐌸 | OLD ITALIC LETTER KU |
| 10313 | 𐌻 | OLD ITALIC LETTER ER |
| 10314 | 𐌾 | OLD ITALIC LETTER ES |
| 10315 | 𐍀 | OLD ITALIC LETTER TE |
| 10316 | 𐍂 | OLD ITALIC LETTER U |
| 10317 | 𐍄 | OLD ITALIC LETTER EKS |
| | | • Faliscan |
| 10318 | 𐍆 | OLD ITALIC LETTER PHE |
| 10319 | 𐍈 | OLD ITALIC LETTER KHE |
| 1031A | 𐍊 | OLD ITALIC LETTER EF |

Umbrian letters

| | | |
|-------|---|-----------------------|
| 1031B | 𐍋 | OLD ITALIC LETTER ERS |
| 1031C | 𐍌 | OLD ITALIC LETTER CHE |

Oscan letters

| | | |
|-------|---|----------------------|
| 1031D | 𐍏 | OLD ITALIC LETTER II |
| 1031E | 𐍒 | OLD ITALIC LETTER UU |

South Picene letter

| | | |
|-------|---|-----------------------|
| 1031F | 𐍔 | OLD ITALIC LETTER ESS |
|-------|---|-----------------------|

Numerals

| | | |
|-------|---|--------------------------|
| 10320 | 𐌳 | OLD ITALIC NUMERAL ONE |
| 10321 | 𐌶 | OLD ITALIC NUMERAL FIVE |
| 10322 | 𐌹 | OLD ITALIC NUMERAL TEN |
| 10323 | 𐌼 | OLD ITALIC NUMERAL FIFTY |

| | 1050 | 1051 | 1052 |
|---|------------|-------------|------------|
| 0 | Ɔ 10500 | ^ 10510 | μ 10520 |
| 1 | ⌘ 10501 | ^. 10511 | h 10521 |
| 2 | ρ 10502 | h 10512 | δ 10522 |
| 3 | ϋ 10503 | N 10513 | Ϛ 10523 |
| 4 | ⌋ 10504 | q 10514 | ϣ 10524 |
| 5 | ⌋ 10505 | ⌋ 10515 | F 10525 |
| 6 | ∇ 10506 | O 10516 | L 10526 |
| 7 | Z 10507 | Π 10517 | X 10527 |
| 8 | Ϛ 10508 | K 10518 | |
| 9 | б 10509 | ⌋ 10519 | |
| A | ѳ 1050A | ⌋ 1051A | |
| B | φ 1050B | C 1051B | |
| C | ξ 1050C | Ϟ 1051C | |
| D | И 1050D | ∇ 1051D | |
| E | I 1050E | θ 1051E | |
| F | Г 1050F | δ 1051F | |

Letters

| | | |
|-------|----|-----------------------|
| 10500 | Ɔ | ELBASAN LETTER A |
| 10501 | ⌘ | ELBASAN LETTER BE |
| 10502 | ρ | ELBASAN LETTER CE |
| 10503 | ϋ | ELBASAN LETTER CHE |
| 10504 | ⌋ | ELBASAN LETTER DE |
| 10505 | ⌋ | ELBASAN LETTER NDE |
| 10506 | ∇ | ELBASAN LETTER DHE |
| 10507 | Z | ELBASAN LETTER EI |
| 10508 | Ϛ | ELBASAN LETTER E |
| 10509 | б | ELBASAN LETTER FE |
| 1050A | ѳ | ELBASAN LETTER GE |
| 1050B | φ | ELBASAN LETTER GJE |
| 1050C | ξ | ELBASAN LETTER HE |
| 1050D | И | ELBASAN LETTER I |
| 1050E | I | ELBASAN LETTER JE |
| 1050F | Г | ELBASAN LETTER KE |
| 10510 | ^ | ELBASAN LETTER LE |
| 10511 | ^. | ELBASAN LETTER LLE |
| 10512 | h | ELBASAN LETTER ME |
| 10513 | N | ELBASAN LETTER NE |
| 10514 | q | ELBASAN LETTER NA |
| 10515 | ⌋ | ELBASAN LETTER NJE |
| 10516 | O | ELBASAN LETTER O |
| 10517 | Π | ELBASAN LETTER PE |
| 10518 | K | ELBASAN LETTER QE |
| 10519 | ⌋ | ELBASAN LETTER RE |
| 1051A | ⌋ | ELBASAN LETTER RRE |
| 1051B | C | ELBASAN LETTER SE |
| 1051C | Ϟ | ELBASAN LETTER SHE |
| 1051D | ∇ | ELBASAN LETTER TE |
| 1051E | θ | ELBASAN LETTER THE |
| 1051F | δ | ELBASAN LETTER U |
| 10520 | μ | ELBASAN LETTER VE |
| 10521 | h | ELBASAN LETTER XE |
| 10522 | δ | ELBASAN LETTER Y |
| 10523 | Ϛ | ELBASAN LETTER ZE |
| 10524 | ϣ | ELBASAN LETTER ZHE |
| 10525 | F | ELBASAN LETTER GHE |
| 10526 | L | ELBASAN LETTER GHAMMA |
| 10527 | X | ELBASAN LETTER KHE |

| | 1060 | 1061 | 1062 | 1063 | 1064 | 1065 | 1066 | 1067 | 1068 | 1069 | 106A | 106B |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 0 | 10600 | 10610 | 10620 | 10630 | 10640 | 10650 | 10660 | 10670 | 10680 | 10690 | 106A0 | 106B0 |
| 1 | 10601 | 10611 | 10621 | 10631 | 10641 | 10651 | 10661 | 10671 | 10681 | 10691 | 106A1 | 106B1 |
| 2 | 10602 | 10612 | 10622 | 10632 | 10642 | 10652 | 10662 | 10672 | 10682 | 10692 | 106A2 | 106B2 |
| 3 | 10603 | 10613 | 10623 | 10633 | 10643 | 10653 | 10663 | 10673 | 10683 | 10693 | 106A3 | 106B3 |
| 4 | 10604 | 10614 | 10624 | 10634 | 10644 | 10654 | 10664 | 10674 | 10684 | 10694 | 106A4 | 106B4 |
| 5 | 10605 | 10615 | 10625 | 10635 | 10645 | 10655 | 10665 | 10675 | 10685 | 10695 | 106A5 | 106B5 |
| 6 | 10606 | 10616 | 10626 | 10636 | 10646 | 10656 | 10666 | 10676 | 10686 | 10696 | 106A6 | 106B6 |
| 7 | 10607 | 10617 | 10627 | 10637 | 10647 | 10657 | 10667 | 10677 | 10687 | 10697 | 106A7 | 106B7 |
| 8 | 10608 | 10618 | 10628 | 10638 | 10648 | 10658 | 10668 | 10678 | 10688 | 10698 | 106A8 | 106B8 |
| 9 | 10609 | 10619 | 10629 | 10639 | 10649 | 10659 | 10669 | 10679 | 10689 | 10699 | 106A9 | 106B9 |
| A | 1060A | 1061A | 1062A | 1063A | 1064A | 1065A | 1066A | 1067A | 1068A | 1069A | 106AA | 106BA |
| B | 1060B | 1061B | 1062B | 1063B | 1064B | 1065B | 1066B | 1067B | 1068B | 1069B | 106AB | 106BB |
| C | 1060C | 1061C | 1062C | 1063C | 1064C | 1065C | 1066C | 1067C | 1068C | 1069C | 106AC | 106BC |
| D | 1060D | 1061D | 1062D | 1063D | 1064D | 1065D | 1066D | 1067D | 1068D | 1069D | 106AD | 106BD |
| E | 1060E | 1061E | 1062E | 1063E | 1064E | 1065E | 1066E | 1067E | 1068E | 1069E | 106AE | 106BE |
| F | 1060F | 1061F | 1062F | 1063F | 1064F | 1065F | 1066F | 1067F | 1068F | 1069F | 106AF | 106BF |

| | 106C | 106D | 106E | 106F | 1070 | 1071 | 1072 | 1073 | 1074 | 1075 | 1076 | 1077 |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| 0 | 106C0 | 106D0 | 106E0 | 106F0 | 10700 | 10710 | 10720 | 10730 | 10740 | 10750 | 10760 | |
| 1 | 106C1 | 106D1 | 106E1 | 106F1 | 10701 | 10711 | 10721 | 10731 | 10741 | 10751 | 10761 | |
| 2 | 106C2 | 106D2 | 106E2 | 106F2 | 10702 | 10712 | 10722 | 10732 | 10742 | 10752 | 10762 | |
| 3 | 106C3 | 106D3 | 106E3 | 106F3 | 10703 | 10713 | 10723 | 10733 | 10743 | 10753 | 10763 | |
| 4 | 106C4 | 106D4 | 106E4 | 106F4 | 10704 | 10714 | 10724 | 10734 | 10744 | 10754 | 10764 | |
| 5 | 106C5 | 106D5 | 106E5 | 106F5 | 10705 | 10715 | 10725 | 10735 | 10745 | 10755 | 10765 | |
| 6 | 106C6 | 106D6 | 106E6 | 106F6 | 10706 | 10716 | 10726 | 10736 | 10746 | | 10766 | |
| 7 | 106C7 | 106D7 | 106E7 | 106F7 | 10707 | 10717 | 10727 | | 10747 | | 10767 | |
| 8 | 106C8 | 106D8 | 106E8 | 106F8 | 10708 | 10718 | 10728 | | 10748 | | | |
| 9 | 106C9 | 106D9 | 106E9 | 106F9 | 10709 | 10719 | 10729 | | 10749 | | | |
| A | 106CA | 106DA | 106EA | 106FA | 1070A | 1071A | 1072A | | 1074A | | | |
| B | 106CB | 106DB | 106EB | 106FB | 1070B | 1071B | 1072B | | 1074B | | | |
| C | 106CC | 106DC | 106EC | 106FC | 1070C | 1071C | 1072C | | 1074C | | | |
| D | 106CD | 106DD | 106ED | 106FD | 1070D | 1071D | 1072D | | 1074D | | | |
| E | 106CE | 106DE | 106EE | 106FE | 1070E | 1071E | 1072E | | 1074E | | | |
| F | 106CF | 106DF | 106EF | 106FF | 1070F | 1071F | 1072F | | 1074F | | | |

Simple signs

| | | |
|-------|---|--|
| 10600 | 𐀀 | LINEAR A SIGN AB001 |
| 10601 | 𐀁 | LINEAR A SIGN AB002 |
| 10602 | 𐀂 | LINEAR A SIGN AB003 |
| 10603 | 𐀃 | LINEAR A SIGN AB004 |
| 10604 | 𐀄 | LINEAR A SIGN AB005 |
| 10605 | 𐀅 | LINEAR A SIGN AB006 |
| 10606 | 𐀆 | LINEAR A SIGN AB007 |
| 10607 | 𐀇 | LINEAR A SIGN AB008 |
| 10608 | 𐀈 | LINEAR A SIGN AB009 |
| 10609 | 𐀉 | LINEAR A SIGN AB010 |
| 1060A | 𐀊 | LINEAR A SIGN AB011 |
| 1060B | 𐀋 | LINEAR A SIGN AB013 |
| 1060C | 𐀌 | LINEAR A SIGN AB016 |
| 1060D | 𐀍 | LINEAR A SIGN AB017 |
| 1060E | 𐀎 | LINEAR A SIGN AB020 |
| 1060F | 𐀏 | LINEAR A SIGN AB021 |
| | | • sheep → 10025 𐀑 linear b syllable b021 qi |
| 10610 | 𐀐 | LINEAR A SIGN AB021F |
| | | • ewe → 10086 𐀒 linear b ideogram b106f ewe |
| 10611 | 𐀑 | LINEAR A SIGN AB021M |
| | | • ram → 10087 𐀒 linear b ideogram b106m ram |
| 10612 | 𐀒 | LINEAR A SIGN AB022 |
| | | • goat → 10052 𐀓 linear b symbol b022 |
| 10613 | 𐀓 | LINEAR A SIGN AB022F |
| | | • she-goat → 10088 𐀕 linear b ideogram b107f she-goat |
| 10614 | 𐀔 | LINEAR A SIGN AB022M |
| | | • he-goat → 10089 𐀕 linear b ideogram b107m he-goat |
| 10615 | 𐀕 | LINEAR A SIGN AB023 |
| | | • bovine → 10018 𐀖 linear b syllable b023 mu |
| 10616 | 𐀖 | LINEAR A SIGN AB023M |
| | | • bull → 1008D 𐀗 linear b ideogram b109m bull |
| 10617 | 𐀗 | LINEAR A SIGN AB024 |
| 10618 | 𐀘 | LINEAR A SIGN AB026 |
| 10619 | 𐀙 | LINEAR A SIGN AB027 |
| 1061A | 𐀚 | LINEAR A SIGN AB028 |
| 1061B | 𐀛 | LINEAR A SIGN A028B |
| 1061C | 𐀜 | LINEAR A SIGN AB029 |
| 1061D | 𐀝 | LINEAR A SIGN AB030 |
| | | • figs → 1001B 𐀞 linear b syllable b030 ni |
| 1061E | 𐀞 | LINEAR A SIGN AB031 |
| 1061F | 𐀟 | LINEAR A SIGN AB034 |
| 10620 | 𐀠 | LINEAR A SIGN AB037 |
| 10621 | 𐀡 | LINEAR A SIGN AB038 |
| 10622 | 𐀢 | LINEAR A SIGN AB039 |
| 10623 | 𐀣 | LINEAR A SIGN AB040 |
| 10624 | 𐀤 | LINEAR A SIGN AB041 |
| 10625 | 𐀥 | LINEAR A SIGN AB044 |
| 10626 | 𐀦 | LINEAR A SIGN AB045 |
| 10627 | 𐀧 | LINEAR A SIGN AB046 |
| 10628 | 𐀨 | LINEAR A SIGN AB047 |
| 10629 | 𐀩 | LINEAR A SIGN AB048 |
| | | → 10045 𐀪 linear b syllable b048 nwa |

| | | |
|-------|---|--|
| 1062A | 𐀫 | LINEAR A SIGN AB049 |
| 1062B | 𐀬 | LINEAR A SIGN AB050 |
| 1062C | 𐀭 | LINEAR A SIGN AB051 |
| 1062D | 𐀮 | LINEAR A SIGN AB053 |
| 1062E | 𐀯 | LINEAR A SIGN AB054 |
| | | • cloth → 100A7 𐀰 linear b ideogram b159 cloth |
| 1062F | 𐀱 | LINEAR A SIGN AB055 |
| 10630 | 𐀲 | LINEAR A SIGN AB056 |
| 10631 | 𐀳 | LINEAR A SIGN AB057 |
| 10632 | 𐀴 | LINEAR A SIGN AB058 |
| 10633 | 𐀵 | LINEAR A SIGN AB059 |
| 10634 | 𐀶 | LINEAR A SIGN AB060 |
| 10635 | 𐀷 | LINEAR A SIGN AB061 |
| 10636 | 𐀸 | LINEAR A SIGN AB065 |
| 10637 | 𐀹 | LINEAR A SIGN AB066 |
| 10638 | 𐀺 | LINEAR A SIGN AB067 |
| 10639 | 𐀻 | LINEAR A SIGN AB069 |
| 1063A | 𐀼 | LINEAR A SIGN AB070 |
| 1063B | 𐀽 | LINEAR A SIGN AB073 |
| 1063C | 𐀾 | LINEAR A SIGN AB074 |
| 1063D | 𐀿 | LINEAR A SIGN AB076 |
| 1063E | 𐁀 | LINEAR A SIGN AB077 |
| 1063F | 𐁁 | LINEAR A SIGN AB078 |
| 10640 | 𐁂 | LINEAR A SIGN AB079 |
| 10641 | 𐁃 | LINEAR A SIGN AB080 |
| 10642 | 𐁄 | LINEAR A SIGN AB081 |
| 10643 | 𐁅 | LINEAR A SIGN AB082 |
| 10644 | 𐁆 | LINEAR A SIGN AB085 |
| | | • pig → 10042 𐁇 linear b syllable b085 au |
| 10645 | 𐁈 | LINEAR A SIGN AB086 |
| 10646 | 𐁉 | LINEAR A SIGN AB087 |
| 10647 | 𐁊 | LINEAR A SIGN A100-102 |
| | | • man or woman → 10080 𐁋 linear b ideogram b100 man → 10081 𐁌 linear b ideogram b102 woman |
| 10648 | 𐁍 | LINEAR A SIGN AB118 |
| 10649 | 𐁎 | LINEAR A SIGN AB120 |
| | | • grain → 1008E 𐁏 linear b ideogram b120 wheat |
| 1064A | 𐁐 | LINEAR A SIGN A120B |
| | | • grain |
| 1064B | 𐁑 | LINEAR A SIGN AB122 |
| | | • olives → 10090 𐁒 linear b ideogram b122 olive |
| 1064C | 𐁓 | LINEAR A SIGN AB123 |
| 1064D | 𐁔 | LINEAR A SIGN AB131A |
| | | • wine → 10096 𐁕 linear b ideogram b131 wine |
| 1064E | 𐁖 | LINEAR A SIGN AB131B |
| | | • wine |
| 1064F | 𐁗 | LINEAR A SIGN A131C |
| | | • wine |
| 10650 | 𐁘 | LINEAR A SIGN AB164 |
| 10651 | 𐁙 | LINEAR A SIGN AB171 |
| 10652 | 𐁚 | LINEAR A SIGN AB180 |
| 10653 | 𐁛 | LINEAR A SIGN AB188 |
| 10654 | 𐁜 | LINEAR A SIGN AB191 |
| 10655 | 𐁝 | LINEAR A SIGN A301 |

| | | |
|-------|--|--|
| 10656 | | LINEAR A SIGN A302 • olive oil → 10095 |
| 10657 | | LINEAR A SIGN A303 • cyperus → 10092 |
| 10658 | | LINEAR A SIGN A304 |
| 10659 | | LINEAR A SIGN A305 |
| 1065A | | LINEAR A SIGN A306 |
| 1065B | | LINEAR A SIGN A307 |
| 1065C | | LINEAR A SIGN A308 |
| 1065D | | LINEAR A SIGN A309A |
| 1065E | | LINEAR A SIGN A309B |
| 1065F | | LINEAR A SIGN A309C |
| 10660 | | LINEAR A SIGN A310 |
| 10661 | | LINEAR A SIGN A311 • used with 10655 |
| 10662 | | LINEAR A SIGN A312 |
| 10663 | | LINEAR A SIGN A313A • used with 10647 |
| 10664 | | LINEAR A SIGN A313B • used with 10647 |
| 10665 | | LINEAR A SIGN A313C • used with 10647 |
| 10666 | | LINEAR A SIGN A314 |
| 10667 | | LINEAR A SIGN A315 |
| 10668 | | LINEAR A SIGN A316 |
| 10669 | | LINEAR A SIGN A317 |
| 1066A | | LINEAR A SIGN A318 |
| 1066B | | LINEAR A SIGN A319 |
| 1066C | | LINEAR A SIGN A320 |
| 1066D | | LINEAR A SIGN A321 |
| 1066E | | LINEAR A SIGN A322 |
| 1066F | | LINEAR A SIGN A323 |
| 10670 | | LINEAR A SIGN A324 |
| 10671 | | LINEAR A SIGN A325 |
| 10672 | | LINEAR A SIGN A326 |
| 10673 | | LINEAR A SIGN A327 |
| 10674 | | LINEAR A SIGN A328 |
| 10675 | | LINEAR A SIGN A329 |
| 10676 | | LINEAR A SIGN A330 • used with 10600 |
| 10677 | | LINEAR A SIGN A331 |
| 10678 | | LINEAR A SIGN A332 |
| 10679 | | LINEAR A SIGN A333 |
| 1067A | | LINEAR A SIGN A334 |
| 1067B | | LINEAR A SIGN A335 |
| 1067C | | LINEAR A SIGN A336 |
| 1067D | | LINEAR A SIGN A337 • used with 10653 |
| 1067E | | LINEAR A SIGN A338 |
| 1067F | | LINEAR A SIGN A339 |
| 10680 | | LINEAR A SIGN A340 |
| 10681 | | LINEAR A SIGN A341 • used with 10622 |
| 10682 | | LINEAR A SIGN A342 |
| 10683 | | LINEAR A SIGN A343 |
| 10684 | | LINEAR A SIGN A344 |
| 10685 | | LINEAR A SIGN A345 |
| 10686 | | LINEAR A SIGN A346 |
| 10687 | | LINEAR A SIGN A347 |

| | | |
|-------|--|---|
| 10688 | | LINEAR A SIGN A348 • used with 10657 |
| 10689 | | LINEAR A SIGN A349 |
| 1068A | | LINEAR A SIGN A350 |
| 1068B | | LINEAR A SIGN A351 • used with 10655 |
| 1068C | | LINEAR A SIGN A352 |
| 1068D | | LINEAR A SIGN A353 |
| 1068E | | LINEAR A SIGN A354 |
| 1068F | | LINEAR A SIGN A355 |
| 10690 | | LINEAR A SIGN A356 |
| 10691 | | LINEAR A SIGN A357 |
| 10692 | | LINEAR A SIGN A358 |
| 10693 | | LINEAR A SIGN A359 |
| 10694 | | LINEAR A SIGN A360 |
| 10695 | | LINEAR A SIGN A361 |
| 10696 | | LINEAR A SIGN A362 |
| 10697 | | LINEAR A SIGN A363 |
| 10698 | | LINEAR A SIGN A364 |
| 10699 | | LINEAR A SIGN A365 |
| 1069A | | LINEAR A SIGN A366 |
| 1069B | | LINEAR A SIGN A367 |
| 1069C | | LINEAR A SIGN A368 |
| 1069D | | LINEAR A SIGN A369 |
| 1069E | | LINEAR A SIGN A370 |
| 1069F | | LINEAR A SIGN A371 |

Vase shapes

| | | |
|-------|--|------------------------|
| 106A0 | | LINEAR A SIGN A400-VAS |
| 106A1 | | LINEAR A SIGN A401-VAS |
| 106A2 | | LINEAR A SIGN A402-VAS |
| 106A3 | | LINEAR A SIGN A403-VAS |
| 106A4 | | LINEAR A SIGN A404-VAS |
| 106A5 | | LINEAR A SIGN A405-VAS |
| 106A6 | | LINEAR A SIGN A406-VAS |
| 106A7 | | LINEAR A SIGN A407-VAS |
| 106A8 | | LINEAR A SIGN A408-VAS |
| 106A9 | | LINEAR A SIGN A409-VAS |
| 106AA | | LINEAR A SIGN A410-VAS |
| 106AB | | LINEAR A SIGN A411-VAS |
| 106AC | | LINEAR A SIGN A412-VAS |
| 106AD | | LINEAR A SIGN A413-VAS |
| 106AE | | LINEAR A SIGN A414-VAS |
| 106AF | | LINEAR A SIGN A415-VAS |
| 106B0 | | LINEAR A SIGN A416-VAS |
| 106B1 | | LINEAR A SIGN A417-VAS |
| 106B2 | | LINEAR A SIGN A418-VAS |

Complex signs

| | | |
|-------|--|---|
| 106B3 | | LINEAR A SIGN A501 • 10600 10601 |
| 106B4 | | LINEAR A SIGN A502 • 10600 10619 10608 |
| 106B5 | | LINEAR A SIGN A503 • 10600 10655 |
| 106B6 | | LINEAR A SIGN A504 • 10601 10601 |
| 106B7 | | LINEAR A SIGN A505 • 10603 10601 |
| 106B8 | | LINEAR A SIGN A506 • 10606 1063F |

| | | | | | |
|-------|---|---|-------|---|---|
| 106B9 | 𐀀 | LINEAR A SIGN A508 • 1060C 𐀀 ab016, 10619 𐀁 ab027 | 106D6 | 𐀁 | LINEAR A SIGN A545 • 10638 𐀁 ab067, 10615 𐀂 ab023 |
| 106BA | 𐀁 | LINEAR A SIGN A509 • 1060C 𐀀 ab016, 10619 𐀁 ab027, 1062B 𐀂 ab050 | 106D7 | 𐀂 | LINEAR A SIGN A547 • 10639 𐀂 ab069, 10601 𐀃 ab002 |
| 106BB | 𐀂 | LINEAR A SIGN A510 • 1060C 𐀀 ab016, 1062B 𐀂 ab050 | 106D8 | 𐀃 | LINEAR A SIGN A548 • 1063B 𐀃 ab073, 10631 𐀄 ab057 |
| 106BC | 𐀃 | LINEAR A SIGN A511 • 1060C 𐀀 ab016, 1062B 𐀂 ab050, 10619 𐀁 ab027 | 106D9 | 𐀄 | LINEAR A SIGN A549 → 106D8 𐀃 linear a sign a548 |
| 106BD | 𐀄 | LINEAR A SIGN A512 • 1060F 𐀄 ab021, 10624 𐀅 ab041 | 106DA | 𐀅 | LINEAR A SIGN A550 • 1063B 𐀃 ab073, 10631 𐀄 ab057, 10618 𐀆 ab026 |
| 106BE | 𐀅 | LINEAR A SIGN A513 • 10614 𐀆 ab022m, 10642 𐀇 ab081 | 106DB | 𐀆 | LINEAR A SIGN A551 • 1063B 𐀃 ab073, 10631 𐀄 ab057, 1061A 𐀇 ab028 |
| 106BF | 𐀆 | LINEAR A SIGN A515 • 10619 𐀁 ab027, 10608 𐀈 ab009 | 106DC | 𐀇 | LINEAR A SIGN A552 • 1063B 𐀃 ab073, 10631 𐀄 ab057, 1063E 𐀈 ab077 |
| 106C0 | 𐀇 | LINEAR A SIGN A516 → 1061A 𐀇 linear a sign ab028 | 106DD | 𐀈 | LINEAR A SIGN A553 • 1063B 𐀃 ab073, 10655 𐀉 a301 |
| 106C1 | 𐀈 | LINEAR A SIGN A520 • 1061A 𐀇 ab028, 10655 𐀉 a301 | 106DE | 𐀉 | LINEAR A SIGN A554 • 1063E 𐀈 ab077, 10607 𐀊 ab008 |
| 106C2 | 𐀉 | LINEAR A SIGN A521 • 1061E 𐀊 ab031, 10615 𐀁 ab023, 10642 𐀇 ab081 | 106DF | 𐀊 | LINEAR A SIGN A555 • 1063F 𐀋 ab078, 10649 𐀌 ab120, 10602 𐀍 ab003 |
| 106C3 | 𐀊 | LINEAR A SIGN A523 • 10620 𐀋 ab037, 10607 𐀊 ab008 | 106E0 | 𐀋 | LINEAR A SIGN A556 → 10641 𐀌 linear a sign ab080 |
| 106C4 | 𐀋 | LINEAR A SIGN A524 • 10620 𐀋 ab037, 106AC 𐀌 a412-vas | 106E1 | 𐀌 | LINEAR A SIGN A557 • 10641 𐀌 ab080, 10607 𐀊 ab008 |
| 106C5 | 𐀌 | LINEAR A SIGN A525 → 10621 𐀍 linear a sign ab038 | 106E2 | 𐀍 | LINEAR A SIGN A559 • 10641 𐀌 ab080, 10618 𐀆 ab026 |
| 106C6 | 𐀍 | LINEAR A SIGN A526 • 10621 𐀍 ab038, 1063E 𐀈 ab077 | 106E3 | 𐀎 | LINEAR A SIGN A563 • 10641 𐀌 ab080, 10641 𐀌 ab080 |
| 106C7 | 𐀎 | LINEAR A SIGN A527 • 10623 𐀎 ab040, 1063C 𐀏 ab074 | 106E4 | 𐀏 | LINEAR A SIGN A564 → 10642 𐀇 linear a sign ab081 |
| 106C8 | 𐀏 | LINEAR A SIGN A528 • 10624 𐀈 ab041, 10606 𐀐 ab007 | 106E5 | 𐀐 | LINEAR A SIGN A565 • 10645 𐀑 ab086, 10653 𐀒 ab188 |
| 106C9 | 𐀐 | LINEAR A SIGN A529 • 10624 𐀈 ab041, 10608 𐀈 ab009 | 106E6 | 𐀑 | LINEAR A SIGN A566 • 10645 𐀑 ab086, 10653 𐀒 ab188 |
| 106CA | 𐀑 | LINEAR A SIGN A530 • 10624 𐀈 ab041, 1060B 𐀓 ab013 | 106E7 | 𐀒 | LINEAR A SIGN A568 • 10647 𐀓 a100-102, 1063E 𐀈 ab077 |
| 106CB | 𐀒 | LINEAR A SIGN A531 • 10624 𐀈 ab041, 1060B 𐀓 ab013, 10638 𐀁 ab067 | 106E8 | 𐀓 | LINEAR A SIGN A569 • 10647 𐀓 a100-102, 1065B 𐀔 a307 |
| 106CC | 𐀓 | LINEAR A SIGN A532 • 10624 𐀈 ab041, 10637 𐀑 ab066 | 106E9 | 𐀔 | LINEAR A SIGN A570 • 10647 𐀓 a100-102, 10663 𐀕 a313a |
| 106CD | 𐀔 | LINEAR A SIGN A534 → 1062C 𐀕 linear a sign ab051 | 106EA | 𐀕 | LINEAR A SIGN A571 • 10647 𐀓 a100-102, 10664 → a313b |
| 106CE | 𐀕 | LINEAR A SIGN A535 • 1062E 𐀖 ab054, 10642 𐀇 ab081 | 106EB | 𐀖 | LINEAR A SIGN A572 • 10647 𐀓 a100-102, 10665 𐀖 a313c |
| 106CF | 𐀖 | LINEAR A SIGN A536 • 1062E 𐀖 ab054, 10662 𐀗 a312 | 106EC | 𐀗 | LINEAR A SIGN A573 • 10649 𐀘 ab120, 10600 𐀙 ab001 |
| 106D0 | 𐀗 | LINEAR A SIGN A537 • 10630 𐀘 ab056, 1063F 𐀋 ab078 | 106ED | 𐀘 | LINEAR A SIGN A574 • 10649 𐀘 ab120, 10602 𐀍 ab003 |
| 106D1 | 𐀘 | LINEAR A SIGN A538 • 10631 𐀄 ab057, 10618 𐀆 ab026 | 106EE | 𐀙 | LINEAR A SIGN A575 • 10649 𐀘 ab120, 10610 𐀚 ab021f |
| 106D2 | 𐀙 | LINEAR A SIGN A539 • 10631 𐀄 ab057, 1063E 𐀈 ab077 | 106EF | 𐀚 | LINEAR A SIGN A576 • 10649 𐀘 ab120, 10614 𐀆 ab022m |
| 106D3 | 𐀚 | LINEAR A SIGN A540 • 10632 𐀅 ab058, 1063B 𐀃 ab073 | 106F0 | 𐀛 | LINEAR A SIGN A577 • 10649 𐀘 ab120, 1062F 𐀛 ab056 |
| 106D4 | 𐀛 | LINEAR A SIGN A541 • 10634 𐀞 ab060, 1063E 𐀈 ab077 | 106F1 | 𐀜 | LINEAR A SIGN A578 • 10649 𐀘 ab120, 1063F 𐀋 ab078 |
| 106D5 | 𐀜 | LINEAR A SIGN A542 • 10636 𐀟 ab065, 10669 𐀠 a317, 1063F 𐀋 ab078 | 106F2 | 𐀝 | LINEAR A SIGN A579 • 10649 𐀘 ab120, 10642 𐀇 ab081 |

| | | |
|-------|---|---|
| 106F3 | 𐀓 | LINEAR A SIGN A580 • 10649 𐀓 ab120, 10741 † a702 b |
| 106F4 | 𐀔 | LINEAR A SIGN A581 • 10649 𐀔 ab120, 10743 𐀔 a704 e |
| 106F5 | 𐀕 | LINEAR A SIGN A582 • 10649 𐀕 ab120, 10744 𐀕 a705 f |
| 106F6 | 𐀖 | LINEAR A SIGN A583 • 10649 𐀖 ab120, 10745 𐀖 a706 h |
| 106F7 | 𐀗 | LINEAR A SIGN A584 • 10649 𐀗 ab120, 10747 𐀗 a708 k, 10749 𐀗 a709-2 l2 |
| 106F8 | 𐀘 | LINEAR A SIGN A585 • 10649 𐀘 ab120, 10749 𐀘 a709-2 l2 |
| 106F9 | 𐀙 | LINEAR A SIGN A586 • 10649 𐀙 ab120, 1074A 𐀙 a709-3 l3, 1074A 𐀙 a709-3 l3 |
| 106FA | 𐀚 | LINEAR A SIGN A587 • 1064B 𐀚 ab122, 10639 𐀚 ab069 |
| 106FB | 𐀛 | LINEAR A SIGN A588 • 1064D 𐀛 ab131a, 10603 𐀛 ab004 |
| 106FC | 𐀜 | LINEAR A SIGN A589 • 1064D 𐀜 ab131a, 1061E 𐀜 ab031 |
| 106FD | 𐀝 | LINEAR A SIGN A591 • 1064D 𐀝 ab131a, 1062E 𐀝 ab054 |
| 106FE | 𐀞 | LINEAR A SIGN A592 • 1064D 𐀞 ab131a, 1062E 𐀞 ab054 |
| 106FF | 𐀟 | LINEAR A SIGN A594 • 1064D 𐀟 ab131a, 10634 𐀟 ab060 |
| 10700 | 𐀠 | LINEAR A SIGN A595 • 1064D 𐀠 ab131a, 10634 𐀠 ab060 |
| 10701 | 𐀡 | LINEAR A SIGN A596 • 1064D 𐀡 ab131a, 1063E 𐀡 ab077 |
| 10702 | 𐀢 | LINEAR A SIGN A598 • 1064D 𐀢 ab131b, 10623 𐀢 ab040 |
| 10703 | 𐀣 | LINEAR A SIGN A600 • 10762 𐀣 a802, 10741 † a702 b |
| 10704 | 𐀤 | LINEAR A SIGN A601 • 10762 𐀤 a802, 10748 𐀤 a709 l |
| 10705 | 𐀥 | LINEAR A SIGN A602 • 10652 𐀥 ab180, 10741 † a702 b |
| 10706 | 𐀦 | LINEAR A SIGN A603 • 10652 𐀦 ab180, 10748 𐀦 a709 l |
| 10707 | 𐀧 | LINEAR A SIGN A604 • 10653 𐀧 ab188, 10642 𐀧 ab081 |
| 10708 | 𐀨 | LINEAR A SIGN A606 • 10655 𐀨 a301, 10661 𐀨 a311 |
| 10709 | 𐀩 | LINEAR A SIGN A608 • 10656 𐀩 a302, 10606 𐀩 ab007 |
| 1070A | 𐀪 | LINEAR A SIGN A609 • 10656 𐀪 a302, 10607 𐀪 ab008 |
| 1070B | 𐀫 | LINEAR A SIGN A610 • 10656 𐀫 a302, 10609 𐀫 ab010 |
| 1070C | 𐀬 | LINEAR A SIGN A611 • 10656 𐀬 a302, 10610 𐀬 ab021f |
| 1070D | 𐀭 | LINEAR A SIGN A612 • 10656 𐀭 a302, 10617 𐀭 ab024 |
| 1070E | 𐀮 | LINEAR A SIGN A613 • 10656 𐀮 a302, 10621 𐀮 ab038 |
| 1070F | 𐀯 | LINEAR A SIGN A614 • 10656 𐀯 a302, 1062D 𐀯 ab053 |
| 10710 | 𐀰 | LINEAR A SIGN A615 • 10656 𐀰 a302, 10633 𐀰 ab059 |

| | | |
|-------|---|--|
| 10711 | 𐀱 | LINEAR A SIGN A616 • 10656 𐀱 a302, 10634 𐀱 ab060 |
| 10712 | 𐀲 | LINEAR A SIGN A617 • 10656 𐀲 a302, 10638 𐀲 ab067 |
| 10713 | 𐀳 | LINEAR A SIGN A618 • 10656 𐀳 a302, 10638 𐀳 ab067 |
| 10714 | 𐀴 | LINEAR A SIGN A619 • 10656 𐀴 a302, 10638 𐀴 ab067, 10609 𐀴 ab010 |
| 10715 | 𐀵 | LINEAR A SIGN A620 • 10656 𐀵 a302, 10638 𐀵 ab067, 1060B 𐀵 ab013 |
| 10716 | 𐀶 | LINEAR A SIGN A621 • 10656 𐀶 a302, 10639 𐀶 ab069 |
| 10717 | 𐀷 | LINEAR A SIGN A622 • 10656 𐀷 a302, 1063B 𐀷 ab073 |
| 10718 | 𐀸 | LINEAR A SIGN A623 • 10656 𐀸 a302, 1063F 𐀸 ab078, 10606 𐀸 ab007 |
| 10719 | 𐀹 | LINEAR A SIGN A624 • 10657 𐀹 a303, 10742 𐀹 a703 d |
| 1071A | 𐀺 | LINEAR A SIGN A626 • 10657 𐀺 a303, 10743 𐀺 a704 e |
| 1071B | 𐀻 | LINEAR A SIGN A627 • 10657 𐀻 a303, 10747 𐀻 a708 k |
| 1071C | 𐀼 | LINEAR A SIGN A628 → 10658 𐀼 linear a sign a304 |
| 1071D | 𐀽 | LINEAR A SIGN A629 • 10658 𐀽 a304, 10602 𐀽 ab003 |
| 1071E | 𐀾 | LINEAR A SIGN A634 • 1065A 𐀾 a306, 1063B 𐀾 ab073 |
| 1071F | 𐀿 | LINEAR A SIGN A637 • 1065B 𐀿 a307, 10655 𐀿 a301 |
| 10720 | 𐁀 | LINEAR A SIGN A638 • 1065B 𐁀 a307, 1065B 𐁀 a307 |
| 10721 | 𐁁 | LINEAR A SIGN A640 • 10668 𐁁 a316, 10638 𐁁 ab067 |
| 10722 | 𐁂 | LINEAR A SIGN A642 → 1066A 𐁂 linear a sign a318 |
| 10723 | 𐁃 | LINEAR A SIGN A643 • 10676 𐁃 a330, 10600 𐁃 ab001 |
| 10724 | 𐁄 | LINEAR A SIGN A644 • 10676 𐁄 a330, 1061E 𐁄 ab031 |
| 10725 | 𐁅 | LINEAR A SIGN A645 • 1067D 𐁅 a337, 10653 𐁅 ab188 |
| 10726 | 𐁆 | LINEAR A SIGN A646 • 10681 𐁆 a341, 10622 𐁆 ab039 |

Complex signs with vase shapes

| | | |
|-------|---|--|
| 10727 | 𐁇 | LINEAR A SIGN A648 • 106A0 𐁇 a400-vas, 1062D 𐁇 ab053 |
| 10728 | 𐁈 | LINEAR A SIGN A649 → 106A1 𐁈 linear a sign a401-vas |
| 10729 | 𐁉 | LINEAR A SIGN A651 • 106A1 𐁉 a401-vas, 10618 𐁉 ab026 |
| 1072A | 𐁊 | LINEAR A SIGN A652 • 106A1 𐁊 a401-vas, 10634 𐁊 ab060 |
| 1072B | 𐁋 | LINEAR A SIGN A653 • 106A1 𐁋 a401-vas, 10658 𐁋 a304 |
| 1072C | 𐁌 | LINEAR A SIGN A654 • 106A4 𐁌 a404-vas, 10607 𐁌 ab008 |
| 1072D | 𐁍 | LINEAR A SIGN A655 • 106A5 𐁍 a405-vas, 10750 𐁍 a713 omega |

































| | | | | | |
|-------|--|---|-------|--|--|
| 1072E | | LINEAR A SIGN A656 • 106A6 a406-vas, 10625 ab044 | 10762 | | LINEAR A SIGN A802 → 10634 linear a sign ab060 |
| 1072F | | LINEAR A SIGN A657 • 106A7 a407-vas, 10607 ab008 | 10763 | | LINEAR A SIGN A803 • 1064D ab131a, 10762 a802 |
| 10730 | | LINEAR A SIGN A658 • 106AC a412-vas, 10743 a704 e | 10764 | | LINEAR A SIGN A804 • 10652 ab180, 1061E ab031 |
| 10731 | | LINEAR A SIGN A659 • 106AC a412-vas, 10744 a705 f | 10765 | | LINEAR A SIGN A805 → 10655 linear a sign a301 |
| 10732 | | LINEAR A SIGN A660 • 106AD a413-vas, 10632 ab058 | 10766 | | LINEAR A SIGN A806 • 10668 a316, 10601 ab002 |
| 10733 | | LINEAR A SIGN A661 → 106AE linear a sign a414-vas | 10767 | | LINEAR A SIGN A807 • 10668 a316, 10742 a703 d |
| 10734 | | LINEAR A SIGN A662 • 106AE a414-vas, 10744 a705 f | | | |
| 10735 | | LINEAR A SIGN A663 • 106B1 a417-vas, 10749 a709-2 l2 | | | |
| 10736 | | LINEAR A SIGN A664 • 106B2 a418-vas, 10749 a709-2 l2 | | | |



















Fractions and compound fractions

| | | |
|-------|--|---|
| 10740 | | LINEAR A SIGN A701 A = possibly one sixth (value uncertain) → 29E7 thermodynamic |
| 10741 | | LINEAR A SIGN A702 B = one third |
| 10742 | | LINEAR A SIGN A703 D = one fifth |
| 10743 | | LINEAR A SIGN A704 E = one quarter |
| 10744 | | LINEAR A SIGN A705 F = one eighth |
| 10745 | | LINEAR A SIGN A706 H = possibly one sixth (value uncertain) |
| 10746 | | LINEAR A SIGN A707 J = one half |
| 10747 | | LINEAR A SIGN A708 K = one sixteenth → 1013C aegean dry measure first subunit |
| 10748 | | LINEAR A SIGN A709 L |
| 10749 | | LINEAR A SIGN A709-2 L2 |
| 1074A | | LINEAR A SIGN A709-3 L3 |
| 1074B | | LINEAR A SIGN A709-4 L4 |
| 1074C | | LINEAR A SIGN A709-6 L6 • used with 10655 linear a sign a301 |
| 1074D | | LINEAR A SIGN A710 W |
| 1074E | | LINEAR A SIGN A711 X → 10139 aegean weight second subunit |
| 1074F | | LINEAR A SIGN A712 Y → 16B9 runic letter wunjjo wynn w |
| 10750 | | LINEAR A SIGN A713 OMEGA • used with 106A5 linear a sign a405-vas |
| 10751 | | LINEAR A SIGN A714 ABB |
| 10752 | | LINEAR A SIGN A715 BB |
| 10753 | | LINEAR A SIGN A717 DD |
| 10754 | | LINEAR A SIGN A726 EYYY |
| 10755 | | LINEAR A SIGN A732 JE = three quarters |


Additional signs







































| | | |
|-------|--|--|
| 10760 | | LINEAR A SIGN A800 • 10603 ab004, 10607 ab008 |
| 10761 | | LINEAR A SIGN A801 • 1062E ab054, 10608 ab009 |

| | 1086 | 1087 |
|---|--|--|
| 0 |  10860 |  10870 |
| 1 |  10861 |  10871 |
| 2 |  10862 |  10872 |
| 3 |  10863 |  10873 |
| 4 |  10864 |  10874 |
| 5 |  10865 |  10875 |
| 6 |  10866 |  10876 |
| 7 |  10867 |  10877 |
| 8 |  10868 |  10878 |
| 9 |  10869 |  10879 |
| A |  1086A |  1087A |
| B |  1086B |  1087B |
| C |  1086C |  1087C |
| D |  1086D |  1087D |
| E |  1086E |  1087E |
| F |  1086F |  1087F |










































Letters10860  PALMYRENE LETTER ALEPH10861  PALMYRENE LETTER BETH10862  PALMYRENE LETTER GIMEL10863  PALMYRENE LETTER DALETH10864  PALMYRENE LETTER HE10865  PALMYRENE LETTER WAW10866  PALMYRENE LETTER ZAYIN10867  PALMYRENE LETTER HETH10868  PALMYRENE LETTER TETH10869  PALMYRENE LETTER YODH1086A  PALMYRENE LETTER KAPH1086B  PALMYRENE LETTER LAMEDH1086C  PALMYRENE LETTER MEM1086D  PALMYRENE LETTER FINAL NUN1086E  PALMYRENE LETTER NUN1086F  PALMYRENE LETTER SAMEKH10870  PALMYRENE LETTER AYIN10871  PALMYRENE LETTER PE10872  PALMYRENE LETTER SADHE10873  PALMYRENE LETTER QOPH10874  PALMYRENE LETTER RESH10875  PALMYRENE LETTER SHIN10876  PALMYRENE LETTER TAW**Symbols**10877  PALMYRENE LEFT-POINTING FLEURON10878  PALMYRENE RIGHT-POINTING FLEURON**Numbers**10879  PALMYRENE NUMBER ONE1087A  PALMYRENE NUMBER TWO1087B  PALMYRENE NUMBER THREE1087C  PALMYRENE NUMBER FOUR1087D  PALMYRENE NUMBER FIVE1087E  PALMYRENE NUMBER TEN

• also used for hundreds

































1087F  PALMYRENE NUMBER TWENTY

| | 1088 | 1089 | 108A |
|---|--|--|--|
| 0 |  10880 |  10890 | |
| 1 |  10881 |  10891 | |
| 2 |  10882 |  10892 | |
| 3 |  10883 |  10893 | |
| 4 |  10884 |  10894 | |
| 5 |  10885 |  10895 | |
| 6 |  10886 |  10896 | |
| 7 |  10887 |  10897 |  108A7 |
| 8 |  10888 |  10898 |  108A8 |
| 9 |  10889 |  10899 |  108A9 |
| A |  1088A |  1089A |  108AA |
| B |  1088B |  1089B |  108AB |
| C |  1088C |  1089C |  108AC |
| D |  1088D |  1089D |  108AD |
| E |  1088E |  1089E |  108AE |
| F | 1088F | | 108AF |

Letters

| | | |
|-------|---|---------------------------------|
| 10880 |  | NABATAEAN LETTER FINAL ALEPH |
| 10881 |  | NABATAEAN LETTER ALEPH |
| 10882 |  | NABATAEAN LETTER FINAL BETH |
| 10883 |  | NABATAEAN LETTER BETH |
| 10884 |  | NABATAEAN LETTER FINAL GIMEL |
| 10885 |  | NABATAEAN LETTER GIMEL |
| 10886 |  | NABATAEAN LETTER FINAL DALETH |
| 10887 |  | NABATAEAN LETTER DALETH |
| 10888 |  | NABATAEAN LETTER FINAL HE |
| 10889 |  | NABATAEAN LETTER HE |
| 1088A |  | NABATAEAN LETTER FINAL HETH |
| 1088B |  | NABATAEAN LETTER HETH |
| 1088C |  | NABATAEAN LETTER FINAL TETH |
| 1088D |  | NABATAEAN LETTER TETH |
| 1088E |  | NABATAEAN LETTER FINAL YODH |
| 1088F |  | NABATAEAN LETTER YODH |
| 10890 |  | NABATAEAN LETTER FINAL KAPH |
| 10891 |  | NABATAEAN LETTER KAPH |
| 10892 |  | NABATAEAN LETTER FINAL LAMEDH |
| 10893 |  | NABATAEAN LETTER LAMEDH |
| 10894 |  | NABATAEAN LETTER FINAL MEM |
| 10895 |  | NABATAEAN LETTER MEM |
| 10896 |  | NABATAEAN LETTER FINAL NUN |
| 10897 |  | NABATAEAN LETTER NUN |
| 10898 |  | NABATAEAN LETTER FINAL SAMEKH |
| 10899 |  | NABATAEAN LETTER SAMEKH |
| 1089A |  | NABATAEAN LETTER FINAL AYIN |
| 1089B |  | NABATAEAN LETTER AYIN |
| 1089C |  | NABATAEAN LETTER FINAL PE |
| 1089D |  | NABATAEAN LETTER PE |
| 1089E |  | NABATAEAN LETTER FINAL SADHE |
| 1089F |  | NABATAEAN LETTER SADHE |
| 108A7 |  | NABATAEAN NUMBER ONE |
| 108A8 |  | NABATAEAN NUMBER TWO |
| 108A9 |  | NABATAEAN NUMBER THREE |
| 108AA |  | NABATAEAN NUMBER FOUR |
| 108AB |  | NABATAEAN CRUCIFORM NUMBER FOUR |
| 108AC |  | NABATAEAN NUMBER FIVE |
| 108AD |  | NABATAEAN NUMBER TEN |
| 108AE |  | NABATAEAN NUMBER TWENTY |
| 108AF |  | NABATAEAN NUMBER ONE HUNDRED |

Numbers

| | 10A8 | 10A9 |
|---|--|--|
| 0 |  10A80 |  10A90 |
| 1 |  10A81 |  10A91 |
| 2 |  10A82 |  10A92 |
| 3 |  10A83 |  10A93 |
| 4 |  10A84 |  10A94 |
| 5 |  10A85 |  10A95 |
| 6 |  10A86 |  10A96 |
| 7 |  10A87 |  10A97 |
| 8 |  10A88 |  10A98 |
| 9 |  10A89 |  10A99 |
| A |  10A8A |  10A9A |
| B |  10A8B |  10A9B |
| C |  10A8C |  10A9C |
| D |  10A8D |  10A9D |
| E |  10A8E |  10A9E |
| F |  10A8F |  10A9F |

Letters

| | | | |
|-------|---|-------------------------------|---|
| 10A80 | 𐩧 | OLD NORTH ARABIAN LETTER HEH | <ul style="list-style-type: none"> transliterated as h → 1200 ሀ ethiopic syllable ha → 10A60 𐩧 old south arabian letter he |
| 10A81 | 𐩨 | OLD NORTH ARABIAN LETTER LAM | <ul style="list-style-type: none"> transliterated as l → 1208 ለ ethiopic syllable la → 10A61 𐩨 old south arabian letter lamedh |
| 10A82 | 𐩩 | OLD NORTH ARABIAN LETTER HAH | <ul style="list-style-type: none"> transliterated as 1E25 ሐ → 1210 ሐ ethiopic syllable hha → 10A62 𐩩 old south arabian letter heth |
| 10A83 | 𐩪 | OLD NORTH ARABIAN LETTER MEEM | <ul style="list-style-type: none"> transliterated as m → 1218 መ ethiopic syllable ma → 10A63 𐩪 old south arabian letter mem |
| 10A84 | 𐩫 | OLD NORTH ARABIAN LETTER QAF | <ul style="list-style-type: none"> transliterated as q → 1240 ቀ ethiopic syllable qa → 10A64 𐩫 old south arabian letter qoph |
| 10A85 | 𐩬 | OLD NORTH ARABIAN LETTER WAW | <ul style="list-style-type: none"> transliterated as w → 12C8 ወ ethiopic syllable wa → 10A65 𐩬 old south arabian letter waw |
| 10A86 | 𐩭 | OLD NORTH ARABIAN LETTER ES-2 | <ul style="list-style-type: none"> transliterated as s2 → 1220 ሠ ethiopic syllable sza → 10A66 𐩭 old south arabian letter shin |
| 10A87 | 𐩮 | OLD NORTH ARABIAN LETTER REH | <ul style="list-style-type: none"> transliterated as r → 1228 ረ ethiopic syllable ra → 10A67 𐩮 old south arabian letter resh |
| 10A88 | 𐩯 | OLD NORTH ARABIAN LETTER BEH | <ul style="list-style-type: none"> transliterated as b → 1260 በ ethiopic syllable ba → 10A68 𐩯 old south arabian letter beth |
| 10A89 | 𐩰 | OLD NORTH ARABIAN LETTER TEH | <ul style="list-style-type: none"> transliterated as t → 1270 ተ ethiopic syllable ta → 10A69 𐩰 old south arabian letter taw |
| 10A8A | 𐩱 | OLD NORTH ARABIAN LETTER ES-1 | <ul style="list-style-type: none"> transliterated as s1 → 1230 ሰ ethiopic syllable sa → 10A6A 𐩱 old south arabian letter sat |
| 10A8B | 𐩲 | OLD NORTH ARABIAN LETTER KAF | <ul style="list-style-type: none"> transliterated as k → 12A8 ከ ethiopic syllable ka → 10A6B 𐩲 old south arabian letter kaph |
| 10A8C | 𐩳 | OLD NORTH ARABIAN LETTER NOON | <ul style="list-style-type: none"> transliterated as n → 1290 ነ ethiopic syllable na → 10A6C 𐩳 old south arabian letter nun |
| 10A8D | 𐩴 | OLD NORTH ARABIAN LETTER KHAH | <ul style="list-style-type: none"> transliterated as 1E2B ከ → 1280 ከ ethiopic syllable xa → 10A6D 𐩴 old south arabian letter kheth |
| 10A8E | 𐩵 | OLD NORTH ARABIAN LETTER SAD | <ul style="list-style-type: none"> transliterated as 1E63 ሠ → 1338 ሠ ethiopic syllable tsa → 10A6E 𐩵 old south arabian letter sadhe |

| | | | |
|-------|---|--------------------------------|--|
| 10A8F | 𐩶 | OLD NORTH ARABIAN LETTER ES-3 | <ul style="list-style-type: none"> transliterated as s3 → 10A6F 𐩶 old south arabian letter samekh |
| 10A90 | 𐩷 | OLD NORTH ARABIAN LETTER FEH | <ul style="list-style-type: none"> transliterated as f → 1348 ፈ ethiopic syllable fa → 10A70 𐩷 old south arabian letter fe |
| 10A91 | 𐩸 | OLD NORTH ARABIAN LETTER ALEF | <ul style="list-style-type: none"> transliterated as 02BC ʾ → 12A0 አ ethiopic syllable glottal a → 10A71 𐩸 old south arabian letter alef |
| 10A92 | 𐩹 | OLD NORTH ARABIAN LETTER AIN | <ul style="list-style-type: none"> transliterated as 02BD ʾ → 12D0 ዐ ethiopic syllable pharyngeal a → 10A72 𐩹 old south arabian letter ayn |
| 10A93 | 𐩺 | OLD NORTH ARABIAN LETTER DAD | <ul style="list-style-type: none"> transliterated as 1E0D ደ → 1340 ዐ ethiopic syllable tza → 10A73 𐩺 old south arabian letter dhadhe |
| 10A94 | 𐩻 | OLD NORTH ARABIAN LETTER GEEM | <ul style="list-style-type: none"> transliterated as g → 1308 ገ ethiopic syllable ga → 10A74 𐩻 old south arabian letter gimel |
| 10A95 | 𐩼 | OLD NORTH ARABIAN LETTER DAL | <ul style="list-style-type: none"> transliterated as d → 12F0 ደ ethiopic syllable da → 10A75 𐩼 old south arabian letter daleth |
| 10A96 | 𐩽 | OLD NORTH ARABIAN LETTER GHAIN | <ul style="list-style-type: none"> transliterated as 0121 ḡ → 10A76 𐩽 old south arabian letter ghayn |
| 10A97 | 𐩾 | OLD NORTH ARABIAN LETTER TAH | <ul style="list-style-type: none"> transliterated as 1E6D ተ → 1320 ጠ ethiopic syllable tha → 10A77 𐩾 old south arabian letter teth |
| 10A98 | 𐩿 | OLD NORTH ARABIAN LETTER ZAIN | <ul style="list-style-type: none"> transliterated as z → 12D8 ረ ethiopic syllable za → 10A78 𐩿 old south arabian letter zayn |
| 10A99 | 𐊀 | OLD NORTH ARABIAN LETTER THAL | <ul style="list-style-type: none"> transliterated as 1E0F ደ → 10A79 ሐ old south arabian letter dhaaleth |
| 10A9A | 𐊁 | OLD NORTH ARABIAN LETTER YEY | <ul style="list-style-type: none"> transliterated as y → 12E8 የ ethiopic syllable ya → 10A7A 𐊁 old south arabian letter yodh |
| 10A9B | 𐊂 | OLD NORTH ARABIAN LETTER THEH | <ul style="list-style-type: none"> transliterated as 1E6F ተ → 10A7B ፄ old south arabian letter thaw |
| 10A9C | 𐊃 | OLD NORTH ARABIAN LETTER ZAH | <ul style="list-style-type: none"> transliterated as 1E93 ረ → 10A7C ረ old south arabian letter theth |

Numbers

| | | |
|-------|---|---------------------------------|
| 10A9D | 𐊄 | OLD NORTH ARABIAN NUMBER ONE |
| 10A9E | 𐊅 | OLD NORTH ARABIAN NUMBER TEN |
| 10A9F | 𐊆 | OLD NORTH ARABIAN NUMBER TWENTY |

| | 10AC | 10AD | 10AE | 10AF |
|---|-------|-------|-------|-------|
| 0 | 10AC0 | 10AD0 | 10AE0 | 10AF0 |
| 1 | 10AC1 | 10AD1 | 10AE1 | 10AF1 |
| 2 | 10AC2 | 10AD2 | 10AE2 | 10AF2 |
| 3 | 10AC3 | 10AD3 | 10AE3 | 10AF3 |
| 4 | 10AC4 | 10AD4 | 10AE4 | 10AF4 |
| 5 | 10AC5 | 10AD5 | 10AE5 | 10AF5 |
| 6 | 10AC6 | 10AD6 | 10AE6 | 10AF6 |
| 7 | 10AC7 | 10AD7 | | |
| 8 | 10AC8 | 10AD8 | | |
| 9 | 10AC9 | 10AD9 | | |
| A | 10ACA | 10ADA | | |
| B | 10ACB | 10ADB | 10AEB | |
| C | 10ACC | 10ADC | 10AEC | |
| D | 10ACD | 10ADD | 10AED | |
| E | 10ACE | 10ADE | 10AEE | |
| F | 10ACF | 10ADF | 10AEF | |

Letters

| | | |
|-------|--|---------------------------|
| 10AC0 | | MANICHAEAN LETTER ALEPH |
| 10AC1 | | MANICHAEAN LETTER BETH |
| 10AC2 | | MANICHAEAN LETTER BHETH |
| 10AC3 | | MANICHAEAN LETTER GIMEL |
| 10AC4 | | MANICHAEAN LETTER GHIMEL |
| 10AC5 | | MANICHAEAN LETTER DALETH |
| 10AC6 | | MANICHAEAN LETTER HE |
| 10AC7 | | MANICHAEAN LETTER WAW |
| 10AC8 | | MANICHAEAN SIGN UD |
| 10AC9 | | MANICHAEAN LETTER ZAYIN |
| 10ACA | | MANICHAEAN LETTER ZHAYIN |
| 10ACB | | MANICHAEAN LETTER JAYIN |
| 10ACC | | MANICHAEAN LETTER JHAYIN |
| 10ACD | | MANICHAEAN LETTER HETH |
| 10ACE | | MANICHAEAN LETTER TETH |
| 10ACF | | MANICHAEAN LETTER YODH |
| 10AD0 | | MANICHAEAN LETTER KAPH |
| 10AD1 | | MANICHAEAN LETTER XAPH |
| 10AD2 | | MANICHAEAN LETTER KHAPH |
| 10AD3 | | MANICHAEAN LETTER LAMEDH |
| 10AD4 | | MANICHAEAN LETTER DHAMEDH |
| 10AD5 | | MANICHAEAN LETTER THAMEDH |
| 10AD6 | | MANICHAEAN LETTER MEM |
| 10AD7 | | MANICHAEAN LETTER NUN |
| 10AD8 | | MANICHAEAN LETTER SAMEKH |
| 10AD9 | | MANICHAEAN LETTER AYIN |
| 10ADA | | MANICHAEAN LETTER AAYIN |
| 10ADB | | MANICHAEAN LETTER PE |
| 10ADC | | MANICHAEAN LETTER FE |
| 10ADD | | MANICHAEAN LETTER SADHE |
| 10ADE | | MANICHAEAN LETTER QOPH |
| 10ADF | | MANICHAEAN LETTER XOPH |
| 10AE0 | | MANICHAEAN LETTER QHOPH |
| 10AE1 | | MANICHAEAN LETTER RESH |
| 10AE2 | | MANICHAEAN LETTER SHIN |
| 10AE3 | | MANICHAEAN LETTER SSHIN |
| 10AE4 | | MANICHAEAN LETTER TAW |

Combining marks

| | | |
|-------|--|------------------------------------|
| 10AE5 | | MANICHAEAN ABBREVIATION MARK ABOVE |
| 10AE6 | | MANICHAEAN ABBREVIATION MARK BELOW |

Numbers

| | | |
|-------|--|-------------------------------|
| 10AEB | | MANICHAEAN NUMBER ONE |
| 10AEC | | MANICHAEAN NUMBER FIVE |
| 10AED | | MANICHAEAN NUMBER TEN |
| 10AEE | | MANICHAEAN NUMBER TWENTY |
| 10AEF | | MANICHAEAN NUMBER ONE HUNDRED |

Punctuation

| | | |
|-------|--|--|
| 10AF0 | | MANICHAEAN PUNCTUATION STAR |
| 10AF1 | | MANICHAEAN PUNCTUATION FLEURON |
| 10AF2 | | MANICHAEAN PUNCTUATION DOUBLE DOT WITHIN DOT |
| 10AF3 | | MANICHAEAN PUNCTUATION DOT WITHIN DOT |
| 10AF4 | | MANICHAEAN PUNCTUATION DOT |
| 10AF5 | | MANICHAEAN PUNCTUATION TWO DOTS |
| 10AF6 | | MANICHAEAN PUNCTUATION LINE FILLER |

| | 111E | 111F |
|---|-------------|--------------|
| 0 | | ෧෦෧ 111F0 |
| 1 | ෧ 111E1 | ෧෦ 111F1 |
| 2 | ෨ 111E2 | ෧෧ 111F2 |
| 3 | ෩ 111E3 | ෧෨ 111F3 |
| 4 | ෪ 111E4 | ෧෩ 111F4 |
| 5 | ෫ 111E5 | |
| 6 | ෬ 111E6 | |
| 7 | ෭ 111E7 | |
| 8 | ෮ 111E8 | |
| 9 | ෯ 111E9 | |
| A | ෧෦ 111EA | |
| B | ෧෧ 111EB | |
| C | ෧෨ 111EC | |
| D | ෧෩ 111ED | |
| E | ෧෪ 111EE | |
| F | ෧෫ 111EF | |

This number system is also known as Sinhala Illakkam. This number system does not have a zero place holder concept unlike the Sinhala astrological numbers, Sinhala Lith Illakkam, encoded in the 0D80-0DFF range.

Historical digits

These digits are not used with a zero

- 111E1 ෧ SINHALA ARCHAIC DIGIT ONE
- 111E2 ෨ SINHALA ARCHAIC DIGIT TWO
- 111E3 ෩ SINHALA ARCHAIC DIGIT THREE
- 111E4 ෪ SINHALA ARCHAIC DIGIT FOUR
- 111E5 ෫ SINHALA ARCHAIC DIGIT FIVE
- 111E6 ෬ SINHALA ARCHAIC DIGIT SIX
- 111E7 ෭ SINHALA ARCHAIC DIGIT SEVEN
- 111E8 ෮ SINHALA ARCHAIC DIGIT EIGHT
- 111E9 ෯ SINHALA ARCHAIC DIGIT NINE

Historical numbers

- 111EA ෧෦ SINHALA ARCHAIC NUMBER TEN
- 111EB ෧෧ SINHALA ARCHAIC NUMBER TWENTY
- 111EC ෧෨ SINHALA ARCHAIC NUMBER THIRTY
- 111ED ෧෩ SINHALA ARCHAIC NUMBER FORTY
- 111EE ෧෪ SINHALA ARCHAIC NUMBER FIFTY
- 111EF ෧෫ SINHALA ARCHAIC NUMBER SIXTY
- 111F0 ෧෦෦ SINHALA ARCHAIC NUMBER SEVENTY
- 111F1 ෧෦෧ SINHALA ARCHAIC NUMBER EIGHTY
- 111F2 ෧෦෨ SINHALA ARCHAIC NUMBER NINETY
- 111F3 ෧෦෩ SINHALA ARCHAIC NUMBER ONE HUNDRED
- 111F4 ෧෦෪ SINHALA ARCHAIC NUMBER ONE THOUSAND

| | 1120 | 1121 | 1122 | 1123 | 1124 |
|---|------------|------------|-------------------------|-----------------------|------|
| 0 | 𑌗 11200 | 𑌘 11210 | 𑌙 11220 | ◌̇ 11230 | |
| 1 | 𑌚 11201 | 𑌛 11211 | 𑌜 11221 | ◌̇̇ 11231 | |
| 2 | 𑌞 11202 | | 𑌟 11222 | ◌̇̇̇ 11232 | |
| 3 | 𑌠 11203 | 𑌡 11213 | 𑌢 11223 | ◌̇̇̇̇ 11233 | |
| 4 | 𑌤 11204 | 𑌥 11214 | 𑌦 11224 | ◌̇̇̇̇̇ 11234 | |
| 5 | 𑌨 11205 | 𑌩 11215 | 𑌪 11225 | ◌̇̇̇̇̇̇ 11235 | |
| 6 | 𑌬 11206 | 𑌭 11216 | 𑌮 11226 | ◌̇̇̇̇̇̇̇ 11236 | |
| 7 | 𑌰 11207 | 𑌱 11217 | 𑌲 11227 | ◌̇̇̇̇̇̇̇̇ 11237 | |
| 8 | 𑌴 11208 | 𑌵 11218 | 𑌶 11228 | 𑌷 11238 | |
| 9 | 𑌹 11209 | 𑌺 11219 | 𑌻 11229 | 𑌼 11239 | |
| A | 𑌽 1120A | 𑌾 1121A | 𑌿 1122A | 𑍀 1123A | |
| B | 𑍁 1120B | 𑍂 1121B | 𑍃 1122B | 𑍄 1123B | |
| C | 𑍇 1120C | 𑍈 1121C | ◌̇̇̇̇̇̇̇̇̇ 1122C | 𑍉 1123C | |
| D | 𑍋 1120D | 𑍌 1121D | ◌̇̇̇̇̇̇̇̇̇̇ 1122D | ◌̇̇̇̇̇̇̇̇̇̇̇ 1123D | |
| E | 𑍏 1120E | 𑍐 1121E | ◌̇̇̇̇̇̇̇̇̇̇̇̇ 1122E | | |
| F | 𑍒 1120F | 𑍓 1121F | ◌̇̇̇̇̇̇̇̇̇̇̇̇̇ 1122F | | |

Independent vowels

| | | |
|-------|---|------------------|
| 11200 | 𑀀 | KHOJKI LETTER A |
| 11201 | 𑀁 | KHOJKI LETTER AA |
| 11202 | 𑀂 | KHOJKI LETTER I |
| 11203 | 𑀃 | KHOJKI LETTER U |
| 11204 | 𑀄 | KHOJKI LETTER E |
| 11205 | 𑀅 | KHOJKI LETTER AI |
| 11206 | 𑀆 | KHOJKI LETTER O |
| 11207 | 𑀇 | KHOJKI LETTER AU |

Consonants

| | | |
|-------|---|--------------------|
| 11208 | 𑀈 | KHOJKI LETTER KA |
| 11209 | 𑀉 | KHOJKI LETTER KHA |
| 1120A | 𑀊 | KHOJKI LETTER GA |
| 1120B | 𑀋 | KHOJKI LETTER GGA |
| 1120C | 𑀌 | KHOJKI LETTER GHA |
| 1120D | 𑀍 | KHOJKI LETTER NGA |
| 1120E | 𑀎 | KHOJKI LETTER CA |
| 1120F | 𑀏 | KHOJKI LETTER CHA |
| 11210 | 𑀐 | KHOJKI LETTER JA |
| 11211 | 𑀑 | KHOJKI LETTER JJA |
| 11212 | 𑀒 | <reserved> |
| 11213 | 𑀓 | KHOJKI LETTER NYA |
| 11214 | 𑀔 | KHOJKI LETTER TTA |
| 11215 | 𑀕 | KHOJKI LETTER TTHA |
| 11216 | 𑀖 | KHOJKI LETTER DDA |
| 11217 | 𑀗 | KHOJKI LETTER DDHA |
| 11218 | 𑀘 | KHOJKI LETTER NNA |
| 11219 | 𑀙 | KHOJKI LETTER TA |
| 1121A | 𑀚 | KHOJKI LETTER THA |
| 1121B | 𑀛 | KHOJKI LETTER DA |
| 1121C | 𑀜 | KHOJKI LETTER DDDA |
| 1121D | 𑀝 | KHOJKI LETTER DHA |
| 1121E | 𑀞 | KHOJKI LETTER NA |
| 1121F | 𑀟 | KHOJKI LETTER PA |
| 11220 | 𑀠 | KHOJKI LETTER PHA |
| 11221 | 𑀡 | KHOJKI LETTER BA |
| 11222 | 𑀢 | KHOJKI LETTER BBA |
| 11223 | 𑀣 | KHOJKI LETTER BHA |
| 11224 | 𑀤 | KHOJKI LETTER MA |
| 11225 | 𑀥 | KHOJKI LETTER YA |
| 11226 | 𑀦 | KHOJKI LETTER RA |
| 11227 | 𑀧 | KHOJKI LETTER LA |
| 11228 | 𑀨 | KHOJKI LETTER VA |
| 11229 | 𑀩 | KHOJKI LETTER SA |
| 1122A | 𑀪 | KHOJKI LETTER HA |
| 1122B | 𑀫 | KHOJKI LETTER LLA |

Dependent vowel signs

| | | |
|-------|---|----------------------|
| 1122C | 𑀬 | KHOJKI VOWEL SIGN AA |
| 1122D | 𑀭 | KHOJKI VOWEL SIGN I |
| 1122E | 𑀮 | KHOJKI VOWEL SIGN II |
| 1122F | 𑀯 | KHOJKI VOWEL SIGN U |
| 11230 | 𑀰 | KHOJKI VOWEL SIGN E |
| 11231 | 𑀱 | KHOJKI VOWEL SIGN AI |
| 11232 | 𑀲 | KHOJKI VOWEL SIGN O |
| 11233 | 𑀳 | KHOJKI VOWEL SIGN AU |

Various signs

| | | |
|-------|---|----------------------|
| 11234 | 𑀴 | KHOJKI SIGN ANUSVARA |
| 11235 | 𑀵 | KHOJKI SIGN VIRAMA |
| 11236 | 𑀶 | KHOJKI SIGN NUKTA |
| 11237 | 𑀷 | KHOJKI SIGN SHADDA |

Punctuation

| | | |
|-------|---|----------------------------|
| 11238 | 𑀸 | KHOJKI DANDA |
| 11239 | 𑀹 | KHOJKI DOUBLE DANDA |
| 1123A | 𑀺 | KHOJKI WORD SEPARATOR |
| 1123B | 𑀻 | KHOJKI SECTION MARK |
| 1123C | 𑀼 | KHOJKI DOUBLE SECTION MARK |
| 1123D | 𑀽 | KHOJKI ABBREVIATION SIGN |

| | 112B | 112C | 112D | 112E | 112F |
|---|-------------|-------------|-------------|-------------|-------------|
| 0 | ྟ 112B0 | མ 112C0 | ཡ 112D0 | ོ 112E0 | ོ 112F0 |
| 1 | ྟཎ 112B1 | མཎ 112C1 | ཡཎ 112D1 | ོཎ 112E1 | ོཎ 112F1 |
| 2 | ྟཏ 112B2 | མཏ 112C2 | ཡཏ 112D2 | ོཏ 112E2 | ོཏ 112F2 |
| 3 | ྟཐ 112B3 | མཐ 112C3 | ཡཐ 112D3 | ོཐ 112E3 | ོཐ 112F3 |
| 4 | ྟད 112B4 | མད 112C4 | ཡད 112D4 | ོད 112E4 | ོད 112F4 |
| 5 | ྟདྷ 112B5 | མདྷ 112C5 | ཡདྷ 112D5 | ོདྷ 112E5 | ོདྷ 112F5 |
| 6 | ྟན 112B6 | མན 112C6 | ཡན 112D6 | ོན 112E6 | ོན 112F6 |
| 7 | ྟཔ 112B7 | མཔ 112C7 | ཡཔ 112D7 | ོཔ 112E7 | ོཔ 112F7 |
| 8 | ྟཕ 112B8 | མཕ 112C8 | ཡཕ 112D8 | ོཕ 112E8 | ོཕ 112F8 |
| 9 | ྟབ 112B9 | མབ 112C9 | ཡབ 112D9 | ོབ 112E9 | ོབ 112F9 |
| A | ྟབྷ 112BA | མབྷ 112CA | ཡབྷ 112DA | ོབྷ 112EA | |
| B | ྟམ 112BB | མམ 112CB | ཡམ 112DB | | |
| C | ྟཙ 112BC | མཙ 112CC | ཡཙ 112DC | | |
| D | ྟཛ 112BD | མཛ 112CD | ཡཛ 112DD | | |
| E | ྟཛྷ 112BE | མཛྷ 112CE | ཡཛྷ 112DE | | |
| F | ྟཝ 112BF | མཝ 112CF | ཡཝ 112DF | | |

Independent vowels

| | | |
|-------|---|---------------------|
| 112B0 | 𑍀 | KHUDAWADI LETTER A |
| 112B1 | 𑍁 | KHUDAWADI LETTER AA |
| 112B2 | 𑍂 | KHUDAWADI LETTER I |
| 112B3 | 𑍃 | KHUDAWADI LETTER II |
| 112B4 | 𑍄 | KHUDAWADI LETTER U |
| 112B5 | 𑍅 | KHUDAWADI LETTER UU |
| 112B6 | 𑍆 | KHUDAWADI LETTER E |
| 112B7 | 𑍇 | KHUDAWADI LETTER AI |
| 112B8 | 𑍈 | KHUDAWADI LETTER O |
| 112B9 | 𑍉 | KHUDAWADI LETTER AU |

Consonants

| | | |
|-------|---|-----------------------|
| 112BA | 𑍊 | KHUDAWADI LETTER KA |
| 112BB | 𑍋 | KHUDAWADI LETTER KHA |
| 112BC | 𑍌 | KHUDAWADI LETTER GA |
| 112BD | 𑍍 | KHUDAWADI LETTER GGA |
| 112BE | 𑍎 | KHUDAWADI LETTER GHA |
| 112BF | 𑍏 | KHUDAWADI LETTER NGA |
| 112C0 | 𑍐 | KHUDAWADI LETTER CA |
| 112C1 | 𑍑 | KHUDAWADI LETTER CHA |
| 112C2 | 𑍒 | KHUDAWADI LETTER JA |
| 112C3 | 𑍓 | KHUDAWADI LETTER JJA |
| 112C4 | 𑍔 | KHUDAWADI LETTER JHA |
| 112C5 | 𑍕 | KHUDAWADI LETTER NYA |
| 112C6 | 𑍖 | KHUDAWADI LETTER TTA |
| 112C7 | 𑍗 | KHUDAWADI LETTER TTHA |
| 112C8 | 𑍘 | KHUDAWADI LETTER DDA |
| 112C9 | 𑍙 | KHUDAWADI LETTER DDDA |
| 112CA | 𑍚 | KHUDAWADI LETTER RRA |
| 112CB | 𑍛 | KHUDAWADI LETTER DDHA |
| 112CC | 𑍜 | KHUDAWADI LETTER NNA |
| 112CD | 𑍝 | KHUDAWADI LETTER TA |
| 112CE | 𑍞 | KHUDAWADI LETTER THA |
| 112CF | 𑍟 | KHUDAWADI LETTER DA |
| 112D0 | 𑍠 | KHUDAWADI LETTER DHA |
| 112D1 | 𑍡 | KHUDAWADI LETTER NA |
| 112D2 | 𑍢 | KHUDAWADI LETTER PA |
| 112D3 | 𑍣 | KHUDAWADI LETTER PHA |
| 112D4 | 𑍤 | KHUDAWADI LETTER BA |
| 112D5 | 𑍥 | KHUDAWADI LETTER BBA |
| 112D6 | 𑍦 | KHUDAWADI LETTER BHA |
| 112D7 | 𑍧 | KHUDAWADI LETTER MA |
| 112D8 | 𑍨 | KHUDAWADI LETTER YA |
| 112D9 | 𑍩 | KHUDAWADI LETTER RA |
| 112DA | 𑍪 | KHUDAWADI LETTER LA |
| 112DB | 𑍫 | KHUDAWADI LETTER VA |
| 112DC | 𑍬 | KHUDAWADI LETTER SHA |
| 112DD | 𑍭 | KHUDAWADI LETTER SA |
| 112DE | 𑍮 | KHUDAWADI LETTER HA |

Sign

| | | |
|-------|---|-------------------------|
| 112DF | 𑍯 | KHUDAWADI SIGN ANUSVARA |
|-------|---|-------------------------|

Dependent vowel signs

| | | |
|-------|---|-------------------------|
| 112E0 | 𑍰 | KHUDAWADI VOWEL SIGN AA |
| 112E1 | 𑍱 | KHUDAWADI VOWEL SIGN I |
| 112E2 | 𑍲 | KHUDAWADI VOWEL SIGN II |
| 112E3 | 𑍳 | KHUDAWADI VOWEL SIGN U |
| 112E4 | 𑍴 | KHUDAWADI VOWEL SIGN UU |
| 112E5 | 𑍵 | KHUDAWADI VOWEL SIGN E |
| 112E6 | 𑍶 | KHUDAWADI VOWEL SIGN AI |
| 112E7 | 𑍷 | KHUDAWADI VOWEL SIGN O |

| | | |
|-------|---|-------------------------|
| 112E8 | 𑍸 | KHUDAWADI VOWEL SIGN AU |
|-------|---|-------------------------|

Various signs

| | | |
|-------|---|-----------------------|
| 112E9 | 𑍹 | KHUDAWADI SIGN NUKTA |
| 112EA | 𑍺 | KHUDAWADI SIGN VIRAMA |


Digits

| | | |
|-------|---|-----------------------|
| 112F0 | 𑍻 | KHUDAWADI DIGIT ZERO |
| 112F1 | 𑍼 | KHUDAWADI DIGIT ONE |
| 112F2 | 𑍽 | KHUDAWADI DIGIT TWO |
| 112F3 | 𑍾 | KHUDAWADI DIGIT THREE |
| 112F4 | 𑍿 | KHUDAWADI DIGIT FOUR |
| 112F5 | 𑎀 | KHUDAWADI DIGIT FIVE |
| 112F6 | 𑎁 | KHUDAWADI DIGIT SIX |
| 112F7 | 𑎂 | KHUDAWADI DIGIT SEVEN |
| 112F8 | 𑎃 | KHUDAWADI DIGIT EIGHT |
| 112F9 | 𑎄 | KHUDAWADI DIGIT NINE |















| | 1148 | 1149 | 114A | 114B | 114C | 114D |
|---|------------|------------|------------|------------|------------|------------|
| 0 | 𑒃 11480 | 𑒄 11490 | 𑒅 114A0 | 𑒆 114B0 | 𑒇 114C0 | 𑒈 114D0 |
| 1 | 𑒉 11481 | 𑒊 11491 | 𑒋 114A1 | 𑒌 114B1 | 𑒍 114C1 | 𑒎 114D1 |
| 2 | 𑒏 11482 | 𑒐 11492 | 𑒑 114A2 | 𑒒 114B2 | 𑒓 114C2 | 𑒔 114D2 |
| 3 | 𑒕 11483 | 𑒖 11493 | 𑒗 114A3 | 𑒘 114B3 | 𑒙 114C3 | 𑒚 114D3 |
| 4 | 𑒛 11484 | 𑒜 11494 | 𑒝 114A4 | 𑒞 114B4 | 𑒟 114C4 | 𑒠 114D4 |
| 5 | 𑒡 11485 | 𑒢 11495 | 𑒣 114A5 | 𑒤 114B5 | 𑒥 114C5 | 𑒦 114D5 |
| 6 | 𑒧 11486 | 𑒨 11496 | 𑒩 114A6 | 𑒪 114B6 | 𑒫 114C6 | 𑒬 114D6 |
| 7 | 𑒭 11487 | 𑒮 11497 | 𑒯 114A7 | 𑒰 114B7 | 𑒱 114C7 | 𑒲 114D7 |
| 8 | 𑒳 11488 | 𑒴 11498 | 𑒵 114A8 | 𑒶 114B8 | | 𑒷 114D8 |
| 9 | 𑒸 11489 | 𑒹 11499 | 𑒺 114A9 | 𑒻 114B9 | | 𑒼 114D9 |
| A | 𑒽 1148A | 𑒾 1149A | 𑒿 114AA | 𑓀 114BA | | |
| B | 𑓁 1148B | 𑓂 1149B | 𑓃 114AB | 𑓄 114BB | | |
| C | 𑓅 1148C | 𑓆 1149C | 𑓇 114AC | 𑓈 114BC | | |
| D | 𑓉 1148D | 𑓊 1149D | 𑓋 114AD | 𑓌 114BD | | |
| E | 𑓍 1148E | 𑓎 1149E | 𑓏 114AE | 𑓐 114BE | | |
| F | 𑓑 1148F | 𑓒 1149F | 𑓓 114AF | 𑓔 114BF | | |

The Tirhuta script is also known by the names 'Mithilakshara' and 'Maithili'.


































Sign

11480  TIRHUTA ANJI






Independent vowels











11481  TIRHUTA LETTER A
 11482  TIRHUTA LETTER AA
 11483  TIRHUTA LETTER I
 11484  TIRHUTA LETTER II
 11485  TIRHUTA LETTER U
 11486  TIRHUTA LETTER UU
 11487  TIRHUTA LETTER VOCALIC R
 11488  TIRHUTA LETTER VOCALIC RR
 11489  TIRHUTA LETTER VOCALIC L
 1148A  TIRHUTA LETTER VOCALIC LL
 1148B  TIRHUTA LETTER E
 1148C  TIRHUTA LETTER AI
 1148D  TIRHUTA LETTER O
 1148E  TIRHUTA LETTER AU

Consonants

1148F  TIRHUTA LETTER KA
 11490  TIRHUTA LETTER KHA
 11491  TIRHUTA LETTER GA
 11492  TIRHUTA LETTER GHA
 11493  TIRHUTA LETTER NGA
 11494  TIRHUTA LETTER CA
 11495  TIRHUTA LETTER CHA
 11496  TIRHUTA LETTER JA
 11497  TIRHUTA LETTER JHA
 11498  TIRHUTA LETTER NYA
 11499  TIRHUTA LETTER TTA
 1149A  TIRHUTA LETTER TTHA
 1149B  TIRHUTA LETTER DDA
 1149C  TIRHUTA LETTER DDHA
 1149D  TIRHUTA LETTER NNA
 1149E  TIRHUTA LETTER TA
 1149F  TIRHUTA LETTER THA
 114A0  TIRHUTA LETTER DA
 114A1  TIRHUTA LETTER DHA
 114A2  TIRHUTA LETTER NA
 114A3  TIRHUTA LETTER PA
 114A4  TIRHUTA LETTER PHA
 114A5  TIRHUTA LETTER BA
 114A6  TIRHUTA LETTER BHA
 114A7  TIRHUTA LETTER MA
 114A8  TIRHUTA LETTER YA
 114A9  TIRHUTA LETTER RA
 114AA  TIRHUTA LETTER LA
 114AB  TIRHUTA LETTER VA
 114AC  TIRHUTA LETTER SHA
 114AD  TIRHUTA LETTER SSA
 114AE  TIRHUTA LETTER SA
 114AF  TIRHUTA LETTER HA

Dependent vowel signs











114B0  TIRHUTA VOWEL SIGN AA
 114B1  TIRHUTA VOWEL SIGN I
 114B2  TIRHUTA VOWEL SIGN II
 114B3  TIRHUTA VOWEL SIGN U
 114B4  TIRHUTA VOWEL SIGN UU

114B5  TIRHUTA VOWEL SIGN VOCALIC R
 114B6  TIRHUTA VOWEL SIGN VOCALIC RR
 114B7  TIRHUTA VOWEL SIGN VOCALIC L
 114B8  TIRHUTA VOWEL SIGN VOCALIC LL
 114B9  TIRHUTA VOWEL SIGN E
 114BA  TIRHUTA VOWEL SIGN SHORT E
 114BB  TIRHUTA VOWEL SIGN AI
 ≡ 114B9  114BA 
 114BC  TIRHUTA VOWEL SIGN O
 ≡ 114B9  114BD 
 114BD  TIRHUTA VOWEL SIGN SHORT O
 114BE  TIRHUTA VOWEL SIGN AU
 ≡ 114B9  114BD 

Various signs

114BF  TIRHUTA SIGN CANDRABINDU
 114C0  TIRHUTA SIGN ANUSVARA
 114C1  TIRHUTA SIGN VISARGA
 114C2  TIRHUTA SIGN VIRAMA
 = halant
 114C3  TIRHUTA SIGN NUKTA
 114C4  TIRHUTA SIGN AVAGRAHA
 114C5  TIRHUTA GVANG
 = vedic anusvara
 114C6  TIRHUTA ABBREVIATION SIGN
 114C7  TIRHUTA OM

Digits

114D0  TIRHUTA DIGIT ZERO
 114D1  TIRHUTA DIGIT ONE
 114D2  TIRHUTA DIGIT TWO
 114D3  TIRHUTA DIGIT THREE
 114D4  TIRHUTA DIGIT FOUR
 114D5  TIRHUTA DIGIT FIVE
 114D6  TIRHUTA DIGIT SIX
 114D7  TIRHUTA DIGIT SEVEN
 114D8  TIRHUTA DIGIT EIGHT
 114D9  TIRHUTA DIGIT NINE

| | 11AC | 11AD | 11AE | 11AF |
|---|------------|------------|------------|------------|
| 0 | Ⓔ 11AC0 | Ⓒ 11AD0 | Ⓔ 11AE0 | ⋮ 11AF0 |
| 1 | ⓪ 11AC1 | Ⓩ 11AD1 | Ⓝ 11AE1 | ↷ 11AF1 |
| 2 | Ⓒ 11AC2 | Ⓡ 11AD2 | Ⓟ 11AE2 | ↷ 11AF2 |
| 3 | ⓪ 11AC3 | ⓗ 11AD3 | Ⓡ 11AE3 | Ⓛ 11AF3 |
| 4 | Ⓑ 11AC4 | ⓗ 11AD4 | ⓪ 11AE4 | Ⓛ 11AF4 |
| 5 | ⓤ 11AC5 | Ⓞ 11AD5 | Ⓛ 11AE5 | Ⓛ 11AF5 |
| 6 | Ⓝ 11AC6 | Ⓢ 11AD6 | Ⓛ 11AE6 | Ⓛ 11AF6 |
| 7 | Ⓢ 11AC7 | ⓗ 11AD7 | Ⓛ 11AE7 | Ⓛ 11AF7 |
| 8 | Ⓢ 11AC8 | Ⓐ 11AD8 | Ⓛ 11AE8 | Ⓛ 11AF8 |
| 9 | Ⓡ 11AC9 | Ⓢ 11AD9 | Ⓛ 11AE9 | |
| A | Ⓞ 11ACA | Ⓡ 11ADA | Ⓛ 11AEA | |
| B | Ⓡ 11ACB | ⓗ 11ADB | Ⓡ 11AEB | |
| C | Ⓡ 11ACC | Ⓢ 11ADC | Ⓡ 11AEC | |
| D | ⓗ 11ACD | Ⓢ 11ADD | Ⓡ 11AED | |
| E | Ⓛ 11ACE | ⓗ 11ADE | Ⓡ 11AEE | |
| F | Ⓔ 11ACF | Ⓢ 11ADF | ⋅ 11AEF | |

Consonants

| | | |
|-------|---|------------------------|
| 11AC0 | ᄁ | PAU CIN HAU LETTER PA |
| 11AC1 | ᄂ | PAU CIN HAU LETTER KA |
| 11AC2 | ᄃ | PAU CIN HAU LETTER LA |
| 11AC3 | ᄄ | PAU CIN HAU LETTER MA |
| 11AC4 | ᄅ | PAU CIN HAU LETTER DA |
| 11AC5 | ᄆ | PAU CIN HAU LETTER ZA |
| 11AC6 | ᄇ | PAU CIN HAU LETTER VA |
| 11AC7 | ᄈ | PAU CIN HAU LETTER NGA |
| 11AC8 | ᄉ | PAU CIN HAU LETTER HA |
| 11AC9 | ᄊ | PAU CIN HAU LETTER GA |
| 11ACA | ᄋ | PAU CIN HAU LETTER KHA |
| 11ACB | ᄌ | PAU CIN HAU LETTER SA |
| 11ACC | ᄍ | PAU CIN HAU LETTER BA |
| 11ACD | ᄎ | PAU CIN HAU LETTER CA |
| 11ACE | ᄏ | PAU CIN HAU LETTER TA |
| 11ACF | ᄐ | PAU CIN HAU LETTER THA |
| 11AD0 | ᄑ | PAU CIN HAU LETTER NA |
| 11AD1 | ᄒ | PAU CIN HAU LETTER PHA |
| 11AD2 | ᄓ | PAU CIN HAU LETTER RA |
| 11AD3 | ᄔ | PAU CIN HAU LETTER FA |
| 11AD4 | ᄕ | PAU CIN HAU LETTER CHA |

Vowels

| | | |
|-------|---|-----------------------|
| 11AD5 | ᄖ | PAU CIN HAU LETTER A |
| 11AD6 | ᄗ | PAU CIN HAU LETTER E |
| 11AD7 | ᄘ | PAU CIN HAU LETTER I |
| 11AD8 | ᄙ | PAU CIN HAU LETTER O |
| 11AD9 | ᄚ | PAU CIN HAU LETTER U |
| 11ADA | ᄛ | PAU CIN HAU LETTER UA |
| 11ADB | ᄜ | PAU CIN HAU LETTER IA |

Final consonants

| | | |
|-------|---|-----------------------------|
| 11ADC | ᄝ | PAU CIN HAU LETTER FINAL P |
| 11ADD | ᄞ | PAU CIN HAU LETTER FINAL K |
| 11ADE | ᄟ | PAU CIN HAU LETTER FINAL T |
| 11ADF | ᄠ | PAU CIN HAU LETTER FINAL M |
| 11AE0 | ᄡ | PAU CIN HAU LETTER FINAL N |
| 11AE1 | ᄢ | PAU CIN HAU LETTER FINAL L |
| 11AE2 | ᄣ | PAU CIN HAU LETTER FINAL W |
| 11AE3 | ᄤ | PAU CIN HAU LETTER FINAL NG |
| 11AE4 | ᄥ | PAU CIN HAU LETTER FINAL Y |

Tone marks

| | | |
|-------|---|---|
| 11AE5 | ᄦ | PAU CIN HAU RISING TONE LONG |
| 11AE6 | ᄧ | PAU CIN HAU RISING TONE |
| 11AE7 | ᄨ | PAU CIN HAU SANDHI GLOTTAL STOP |
| 11AE8 | ᄩ | PAU CIN HAU RISING TONE LONG FINAL |
| 11AE9 | ᄪ | PAU CIN HAU RISING TONE FINAL |
| 11AEA | ᄫ | PAU CIN HAU SANDHI GLOTTAL STOP FINAL |
| 11AEB | ᄬ | PAU CIN HAU SANDHI TONE LONG |
| 11AEC | ᄭ | PAU CIN HAU SANDHI TONE |
| 11AED | ᄮ | PAU CIN HAU SANDHI TONE LONG FINAL |
| 11AEE | ᄮ | PAU CIN HAU SANDHI TONE FINAL |
| 11AEF | ᄯ | PAU CIN HAU MID-LEVEL TONE |
| 11AF0 | ᄰ | PAU CIN HAU GLOTTAL STOP VARIANT |
| 11AF1 | ᄱ | PAU CIN HAU MID-LEVEL TONE LONG FINAL |
| 11AF2 | ᄱ | PAU CIN HAU MID-LEVEL TONE FINAL |
| 11AF3 | ᄲ | PAU CIN HAU LOW-FALLING TONE LONG |
| 11AF4 | ᄲ | PAU CIN HAU LOW-FALLING TONE |
| 11AF5 | ᄳ | PAU CIN HAU GLOTTAL STOP |
| 11AF6 | ᄴ | PAU CIN HAU LOW-FALLING TONE LONG FINAL |

11AF7 ᄵ PAU CIN HAU LOW-FALLING TONE FINAL

11AF8 ᄶ PAU CIN HAU GLOTTAL STOP FINAL

| | 16A4 | 16A5 | 16A6 |
|---|-------------|-------------|-------------|
| 0 | ၣ် 16A40 | ၣ် 16A50 | ၣ် 16A60 |
| 1 | ၣ် 16A41 | ၣ် 16A51 | ၣ် 16A61 |
| 2 | ၣ် 16A42 | ၣ် 16A52 | ၣ် 16A62 |
| 3 | ၣ် 16A43 | ၣ် 16A53 | ၣ် 16A63 |
| 4 | ၣ် 16A44 | ၣ် 16A54 | ၣ် 16A64 |
| 5 | ၣ် 16A45 | ၣ် 16A55 | ၣ် 16A65 |
| 6 | ၣ် 16A46 | ၣ် 16A56 | ၣ် 16A66 |
| 7 | ၣ် 16A47 | ၣ် 16A57 | ၣ် 16A67 |
| 8 | ၣ် 16A48 | ၣ် 16A58 | ၣ် 16A68 |
| 9 | ၣ် 16A49 | ၣ် 16A59 | ၣ် 16A69 |
| A | ၣ် 16A4A | ၣ် 16A5A | |
| B | ၣ် 16A4B | ၣ် 16A5B | |
| C | ၣ် 16A4C | ၣ် 16A5C | |
| D | ၣ် 16A4D | ၣ် 16A5D | |
| E | ၣ် 16A4E | ၣ် 16A5E | ၣ် 16A6E |
| F | ၣ် 16A4F | | ၣ် 16A6F |

Letters





































| | | |
|-------|----|---------------------------------------|
| 16A40 | ၣ် | MRO LETTER TA |
| 16A41 | ၣ် | MRO LETTER NGI |
| 16A42 | ၣ် | MRO LETTER YO |
| 16A43 | ၣ် | MRO LETTER MIM |
| 16A44 | ၣ် | MRO LETTER BA |
| 16A45 | ၣ် | MRO LETTER DA |
| 16A46 | ၣ် | MRO LETTER A |
| 16A47 | ၣ် | MRO LETTER PHI |
| 16A48 | ၣ် | MRO LETTER KHAI |
| 16A49 | ၣ် | MRO LETTER HAO |
| 16A4A | ၣ် | MRO LETTER DAI = i |
| 16A4B | ၣ် | MRO LETTER CHU |
| 16A4C | ၣ် | MRO LETTER KEAAE |
| 16A4D | ၣ် | MRO LETTER OL |
| 16A4E | ၣ် | MRO LETTER MAEM |
| 16A4F | ၣ် | MRO LETTER NIN |
| 16A50 | ၣ် | MRO LETTER PA |
| 16A51 | ၣ် | MRO LETTER OO |
| 16A52 | ၣ် | MRO LETTER O |
| 16A53 | ၣ် | MRO LETTER RO |
| 16A54 | ၣ် | MRO LETTER SHI |
| 16A55 | ၣ် | MRO LETTER THEA |
| 16A56 | ၣ် | MRO LETTER EA |
| 16A57 | ၣ် | MRO LETTER WA |
| 16A58 | ၣ် | MRO LETTER E |
| 16A59 | ၣ် | MRO LETTER KO |
| 16A5A | ၣ် | MRO LETTER LAN |
| 16A5B | ၣ် | MRO LETTER LA = symbol for 'month' |
| 16A5C | ၣ် | MRO LETTER HAI |
| 16A5D | ၣ် | MRO LETTER RI = o |
| 16A5E | ၣ် | MRO LETTER TEK |

Digits





















| | | |
|-------|----|-----------------|
| 16A60 | ၣ် | MRO DIGIT ZERO |
| 16A61 | ၣ် | MRO DIGIT ONE |
| 16A62 | ၣ် | MRO DIGIT TWO |
| 16A63 | ၣ် | MRO DIGIT THREE |
| 16A64 | ၣ် | MRO DIGIT FOUR |
| 16A65 | ၣ် | MRO DIGIT FIVE |
| 16A66 | ၣ် | MRO DIGIT SIX |
| 16A67 | ၣ် | MRO DIGIT SEVEN |
| 16A68 | ၣ် | MRO DIGIT EIGHT |
| 16A69 | ၣ် | MRO DIGIT NINE |

Punctuation








| | | |
|-------|----|------------------|
| 16A6E | ၣ် | MRO DANDA |
| 16A6F | ၣ် | MRO DOUBLE DANDA |

| | 16AD | 16AE | 16AF |
|---|--|--|--|
| 0 |  16AD0 |  16AE0 |  16AF0 |
| 1 |  16AD1 |  16AE1 |  16AF1 |
| 2 |  16AD2 |  16AE2 |  16AF2 |
| 3 |  16AD3 |  16AE3 |  16AF3 |
| 4 |  16AD4 |  16AE4 |  16AF4 |
| 5 |  16AD5 |  16AE5 |  16AF5 |
| 6 |  16AD6 |  16AE6 | |
| 7 |  16AD7 |  16AE7 | |
| 8 |  16AD8 |  16AE8 | |
| 9 |  16AD9 |  16AE9 | |
| A |  16ADA |  16AEA | |
| B |  16ADB |  16AEB | |
| C |  16ADC |  16AEC | |
| D |  16ADD |  16AED | |
| E |  16ADE | | |
| F |  16ADF | | |






Consonant letters

| | | |
|-------|---|------------------------|
| 16AD0 |  | BASSA VAH LETTER ENNI |
| 16AD1 |  | BASSA VAH LETTER KA |
| 16AD2 |  | BASSA VAH LETTER SE |
| 16AD3 |  | BASSA VAH LETTER FA |
| 16AD4 |  | BASSA VAH LETTER MBE |
| 16AD5 |  | BASSA VAH LETTER YIE |
| 16AD6 |  | BASSA VAH LETTER GAH |
| 16AD7 |  | BASSA VAH LETTER DHII |
| 16AD8 |  | BASSA VAH LETTER KPAH |
| 16AD9 |  | BASSA VAH LETTER JO |
| 16ADA |  | BASSA VAH LETTER HWAH |
| 16ADB |  | BASSA VAH LETTER WA |
| 16ADC |  | BASSA VAH LETTER ZO |
| 16ADD |  | BASSA VAH LETTER GBU |
| 16ADE |  | BASSA VAH LETTER DO |
| 16ADF |  | BASSA VAH LETTER CE |
| 16AE0 |  | BASSA VAH LETTER UWU |
| 16AE1 |  | BASSA VAH LETTER BA |
| 16AE2 |  | BASSA VAH LETTER VU |
| 16AE3 |  | BASSA VAH LETTER YEIN |
| 16AE4 |  | BASSA VAH LETTER PA |
| 16AE5 |  | BASSA VAH LETTER WADDA |


Vowel letters

| | | |
|-------|---|---------------------|
| 16AE7 |  | BASSA VAH LETTER A |
| 16AE8 |  | BASSA VAH LETTER O |
| 16AE9 |  | BASSA VAH LETTER OO |
| 16AEA |  | BASSA VAH LETTER U |
| 16AEB |  | BASSA VAH LETTER EE |
| 16AEC |  | BASSA VAH LETTER E |
| 16AED |  | BASSA VAH LETTER I |

Combining tone marks

| | | |
|-------|---|-----------------------------------|
| 16AF0 |  | BASSA VAH COMBINING HIGH TONE |
| 16AF1 |  | BASSA VAH COMBINING LOW TONE |
| 16AF2 |  | BASSA VAH COMBINING MID TONE |
| 16AF3 |  | BASSA VAH COMBINING LOW-MID TONE |
| 16AF4 |  | BASSA VAH COMBINING HIGH-LOW TONE |

Punctuation

| | | |
|-------|---|---------------------|
| 16AF5 |  | BASSA VAH FULL STOP |
|-------|---|---------------------|

| | 1BC0 | 1BC1 | 1BC2 | 1BC3 | 1BC4 | 1BC5 | 1BC6 | 1BC7 | 1BC8 | 1BC9 |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 0 | 1BC00 | 1BC10 | 1BC20 | 1BC30 | 1BC40 | 1BC50 | 1BC60 | 1BC70 | 1BC80 | 1BC90 |
| 1 | 1BC01 | 1BC11 | 1BC21 | 1BC31 | 1BC41 | 1BC51 | 1BC61 | 1BC71 | 1BC81 | 1BC91 |
| 2 | 1BC02 | 1BC12 | 1BC22 | 1BC32 | 1BC42 | 1BC52 | 1BC62 | 1BC72 | 1BC82 | 1BC92 |
| 3 | 1BC03 | 1BC13 | 1BC23 | 1BC33 | 1BC43 | 1BC53 | 1BC63 | 1BC73 | 1BC83 | 1BC93 |
| 4 | 1BC04 | 1BC14 | 1BC24 | 1BC34 | 1BC44 | 1BC54 | 1BC64 | 1BC74 | 1BC84 | 1BC94 |
| 5 | 1BC05 | 1BC15 | 1BC25 | 1BC35 | 1BC45 | 1BC55 | 1BC65 | 1BC75 | 1BC85 | 1BC95 |
| 6 | 1BC06 | 1BC16 | 1BC26 | 1BC36 | 1BC46 | 1BC56 | 1BC66 | 1BC76 | 1BC86 | 1BC96 |
| 7 | 1BC07 | 1BC17 | 1BC27 | 1BC37 | 1BC47 | 1BC57 | 1BC67 | 1BC77 | 1BC87 | 1BC97 |
| 8 | 1BC08 | 1BC18 | 1BC28 | 1BC38 | 1BC48 | 1BC58 | 1BC68 | 1BC78 | 1BC88 | 1BC98 |
| 9 | 1BC09 | 1BC19 | 1BC29 | 1BC39 | 1BC49 | 1BC59 | 1BC69 | 1BC79 | 1BC89 | 1BC99 |
| A | 1BC0A | 1BC1A | 1BC2A | 1BC3A | 1BC4A | 1BC5A | 1BC6A | 1BC7A | 1BC8A | 1BC9A |
| B | 1BC0B | 1BC1B | 1BC2B | 1BC3B | 1BC4B | 1BC5B | 1BC6B | 1BC7B | 1BC8B | 1BC9B |
| C | 1BC0C | 1BC1C | 1BC2C | 1BC3C | 1BC4C | 1BC5C | 1BC6C | 1BC7C | 1BC8C | 1BC9C |
| D | 1BC0D | 1BC1D | 1BC2D | 1BC3D | 1BC4D | 1BC5D | 1BC6D | 1BC7D | 1BC8D | 1BC9D |
| E | 1BC0E | 1BC1E | 1BC2E | 1BC3E | 1BC4E | 1BC5E | 1BC6E | 1BC7E | 1BC8E | 1BC9E |
| F | 1BC0F | 1BC1F | 1BC2F | 1BC3F | 1BC4F | 1BC5F | 1BC6F | 1BC7F | 1BC8F | 1BC9F |

Non-joining consonants

| | | | |
|-------|---|-------------------|------------------------------------|
| 1BC00 | · | DUPLOYAN LETTER H | • Chinook, Pernin, Sloan, Perrault |
| 1BC01 | · | DUPLOYAN LETTER X | • Salishan |

Line consonants

| | | | |
|-------|---|--------------------------|---|
| 1BC02 | | DUPLOYAN LETTER P | • Chinook number 1 |
| 1BC03 | - | DUPLOYAN LETTER T | • Chinook number 2 |
| 1BC04 | \ | DUPLOYAN LETTER F | • Chinook number 3 |
| 1BC05 | / | DUPLOYAN LETTER K | • Chinook number 4 • written down and to the left |
| 1BC06 | / | DUPLOYAN LETTER L | • written up and to the right = Pernin letter R |
| 1BC07 | | DUPLOYAN LETTER B | → 1BC73 † duployan affix low vertical secant → 1BC74 † duployan affix mid vertical secant → 1BC75 † duployan affix high vertical secant |
| 1BC08 | - | DUPLOYAN LETTER D | → 1BC70 † duployan affix left horizontal secant → 1BC71 † duployan affix mid horizontal secant → 1BC72 † duployan affix right horizontal secant |
| 1BC09 | \ | DUPLOYAN LETTER V | |
| 1BC0A | / | DUPLOYAN LETTER G | • written down and to the left |
| 1BC0B | / | DUPLOYAN LETTER R | • Chinook number 5 • French number milliards • written up and to the right = Pernin letter L = Pernin Reporters' word repeat sign |
| 1BC0C | | DUPLOYAN LETTER P N | = Sloan B B → 1BC02 duployan letter p → 1BC1A) duployan letter n |
| 1BC0D | - | DUPLOYAN LETTER D S | = Sloan D D → 1BC08 - duployan letter d → 1BC1C ∪ duployan letter s |
| 1BC0E | \ | DUPLOYAN LETTER F N | = Sloan V V → 1BC04 \ duployan letter f → 1BC1A) duployan letter n |
| 1BC0F | / | DUPLOYAN LETTER K M | • written down and to the left = Sloan G G → 1BC05 / duployan letter k → 1BC19 (duployan letter m |
| 1BC10 | / | DUPLOYAN LETTER R S | • written up and to the right = Sloan R R → 1BC0B / duployan letter r → 1BC1C ∪ duployan letter s |
| 1BC11 | - | DUPLOYAN LETTER TH | • Chinook, Sloan, Pernin, Perrault |
| 1BC12 | - | DUPLOYAN LETTER SLOAN DH | |

| | | | |
|-------|---|-------------------------|---|
| 1BC13 | - | DUPLOYAN LETTER DH | • Chinook → 1BC08 - duployan letter d |
| 1BC14 | / | DUPLOYAN LETTER KK | • Chinook • written down and to the left |
| 1BC15 | / | DUPLOYAN LETTER SLOAN J | • written down and to the left |
| 1BC16 | / | DUPLOYAN LETTER HL | • Chinook • written up and to the right |
| 1BC17 | / | DUPLOYAN LETTER LH | • Chinook • written up and to the right |
| 1BC18 | / | DUPLOYAN LETTER RH | • Chinook • written up and to the right |

Arc consonants

| | | | |
|-------|---|--|---|
| 1BC19 | (| DUPLOYAN LETTER M | • Chinook number 6 |
| 1BC1A |) | DUPLOYAN LETTER N | • Chinook number 7 |
| 1BC1B | ∩ | DUPLOYAN LETTER J | • Chinook number 8 = Chinook letter sh = Pernin letter sh |
| 1BC1C | ∪ | DUPLOYAN LETTER S | • Chinook number 9 • French hundreds |
| 1BC1D | (| DUPLOYAN LETTER M N | • Romanian mai mult, not Romanian mult mai shorthand sign → 1BC19 (duployan letter m → 1BC1A) duployan letter n |
| 1BC1E |) | DUPLOYAN LETTER N M | • not Romanian nu nu shorthand sign → 1BC19 (duployan letter m → 1BC1A) duployan letter n |
| 1BC1F | ∩ | DUPLOYAN LETTER J M | • not Romanian ceea ce shorthand sign → 1BC1B ∩ duployan letter j → 1BC19 (duployan letter m |
| 1BC20 | ∪ | DUPLOYAN LETTER S J | • not Romanian sa se shorthand sign → 1BC1B ∩ duployan letter j → 1BC1C ∪ duployan letter s |
| 1BC21 | (| DUPLOYAN LETTER M WITH DOT | = Romanian sign mijloc |
| 1BC22 |) | DUPLOYAN LETTER N WITH DOT | = Chinook ng = Romanian sign nici |
| 1BC23 | ∩ | DUPLOYAN LETTER J WITH DOT | = Chinook, Romanian ch = Sloan zh = Chinook, Perrault j |
| 1BC24 | ∩ | DUPLOYAN LETTER J WITH DOTS INSIDE AND ABOVE | = Romanian sign ici si colo • used in isolation |
| 1BC25 | ∪ | DUPLOYAN LETTER S WITH DOT | = Chinook ts = Chinook, Romanian, Sloan z |

| | | |
|-------|---|---|
| 1BC26 | ∩ | DUPLOYAN LETTER S WITH DOT BELOW = Romanian sh |
| 1BC27 | (| DUPLOYAN LETTER M S = Sloan shorthand letter m m → 1BC19 (duployan letter m → 1BC1C ∩ duployan letter s |
| 1BC28 |) | DUPLOYAN LETTER N S = Pernin, Sloan, Perrault letter ng → 1BC1A) duployan letter n → 1BC1C ∩ duployan letter s |
| 1BC29 | ∩ | DUPLOYAN LETTER J S = Romanian stenographic letter ge = Pernin, Perrault letter zh = Sloan letter ch → 1BC1B ∩ duployan letter j → 1BC1C ∩ duployan letter s |
| 1BC2A | ∩ | DUPLOYAN LETTER S S • French, Sloan = Romanian stenographic letter ts = Pernin, Perrault letter z → 1BC1C ∩ duployan letter s |
| 1BC2B | { | DUPLOYAN LETTER M N S → 1BC19 (duployan letter m → 1BC1A) duployan letter n → 1BC1C ∩ duployan letter s |
| 1BC2C | } | DUPLOYAN LETTER N M S → 1BC19 (duployan letter m → 1BC1A) duployan letter n → 1BC1C ∩ duployan letter s |
| 1BC2D | ∩ | DUPLOYAN LETTER J M S → 1BC1B ∩ duployan letter j → 1BC19 (duployan letter m → 1BC1C ∩ duployan letter s |
| 1BC2E | ∩ | DUPLOYAN LETTER S J S → 1BC1C ∩ duployan letter s → 1BC1B ∩ duployan letter j |
| 1BC2F | ∩ | DUPLOYAN LETTER J S WITH DOT = Sloan letter hard ch = Pernin, Perrault letter ch |
| 1BC30 | ∩ | DUPLOYAN LETTER J N → 1BC1B ∩ duployan letter j → 1BC1A) duployan letter n |
| 1BC31 | ∩ | DUPLOYAN LETTER J N S → 1BC1B ∩ duployan letter j → 1BC1A) duployan letter n → 1BC1C ∩ duployan letter s |

Quarter-arc consonants

| | | |
|-------|---|---|
| 1BC32 | ∩ | DUPLOYAN LETTER S T • Pernin, Perrault • written downwards = Sloan sm |
| 1BC33 | ∩ | DUPLOYAN LETTER S T R • Pernin, Perrault • written downwards = Sloan sn |
| 1BC34 | ∩ | DUPLOYAN LETTER S P • Pernin, Perrault • written downwards = Sloan kw |
| 1BC35 | ∩ | DUPLOYAN LETTER S P R • Pernin, Perrault • written downwards = Sloan skw |

| | | |
|-------|---|---|
| 1BC36 | ∩ | DUPLOYAN LETTER T S • written downwards • Perrault = Sloan std |
| 1BC37 | ∩ | DUPLOYAN LETTER T R S • written downwards • Perrault = Sloan sst |
| 1BC38 | ∩ | DUPLOYAN LETTER W • Sloan, Perrault, Pernin • written downwards • takes form of a hook or wave after k and g |
| 1BC39 | ∩ | DUPLOYAN LETTER WH • written downwards |
| 1BC3A | ∩ | DUPLOYAN LETTER W R • written downwards • Perrault = Sloan sw |
| 1BC3B | ∩ | DUPLOYAN LETTER S N • written upwards • Perrault = Pernin krs = Sloan SP |
| 1BC3C | ∩ | DUPLOYAN LETTER S M • written upwards • Perrault = Pernin grs = Sloan sl |
| 1BC3D | ∩ | DUPLOYAN LETTER K R S • written upwards • Perrault |
| 1BC3E | ∩ | DUPLOYAN LETTER G R S • written upwards • Perrault |
| 1BC3F | ∩ | DUPLOYAN LETTER S K • written upwards • Perrault, Pernin = Sloan ts |
| 1BC40 | ∩ | DUPLOYAN LETTER S K R • written upwards • Perrault, Pernin = Sloan ds |

Circle vowels

| | | |
|-------|---|--|
| 1BC41 | ◦ | DUPLOYAN LETTER A • Chinook number tens |
| 1BC42 | ◦ | DUPLOYAN LETTER SLOAN OW • reverse circle vowel |
| 1BC43 | ◦ | DUPLOYAN LETTER OA = Pernin letter aw = Perrault letter aw |
| 1BC44 | ◦ | DUPLOYAN LETTER O • Chinook number 0 |
| 1BC45 | ◦ | DUPLOYAN LETTER AOU |

Semi-circle vowels

| | | | |
|-------|---|-----------------------------------|---|
| 1BC46 | ◁ | DUPLOYAN LETTER I | <ul style="list-style-type: none"> • character rotates to match entry angle of preceding consonant • character has primary orientation (right and up) = Perrault letter long a, short e (with accents) → 1BC48 ◁ duployan letter ie → 1BC49 ▷ duployan letter short i → 1BC4B ∨ duployan letter ee → 1BC4A ∩ duployan letter ui → 1BC7B ∩ duployan affix attached i hook → 1BC7A ∩ duployan affix attached e hook |
| 1BC47 | ∨ | DUPLOYAN LETTER E | <ul style="list-style-type: none"> • character rotates to match entry angle of preceding consonant • character has secondary orientation (left and down) = Sloan letter long a = Perrault letter short i, long e (with dot accent) → 1BC7A ∩ duployan affix attached e hook |
| 1BC48 | ◁ | DUPLOYAN LETTER IE | <ul style="list-style-type: none"> • Duployan shorthand • used as an invariant vowel and for orienting word abbreviations consisting of only vowels → 1BC46 ◁ duployan letter i = Pernin letter a |
| 1BC49 | ▷ | DUPLOYAN LETTER SHORT I | <ul style="list-style-type: none"> • Pernin, Duployan shorthand • used as an invariant vowel and for orienting word abbreviations consisting of only vowels → 1BC46 ◁ duployan letter i = Consolidated Duployan letter r t r |
| 1BC4A | ∩ | DUPLOYAN LETTER UI | <ul style="list-style-type: none"> • Duployan shorthand • used as an invariant vowel and for orienting word abbreviations consisting of only vowels → 1BC46 ◁ duployan letter i = Pernin letter e |
| 1BC4B | ∨ | DUPLOYAN LETTER EE | <ul style="list-style-type: none"> • Pernin, Duployan shorthand • used as an invariant vowel and for orienting word abbreviations consisting of only vowels → 1BC46 ◁ duployan letter i |
| 1BC4C | ◊ | DUPLOYAN LETTER SLOAN EH | |
| 1BC4D | ∩ | DUPLOYAN LETTER ROMANIAN I | <ul style="list-style-type: none"> • character rotates to match entry angle of preceding consonant, with dot maintaining relative position • secondary orienting (left and down) |
| 1BC4E | ∩ | DUPLOYAN LETTER SLOAN EE | |

Diagonal-line vowels

| | | | |
|-------|---|-------------------------------|---|
| 1BC4F | / | DUPLOYAN LETTER LONG I | <ul style="list-style-type: none"> • Pernin • angles like an "l" when adjacent a k-type consonant |
| 1BC50 | ∩ | DUPLOYAN LETTER YE | |

Quarter-circle vowels

| | | | |
|-------|---|----------------------------|--|
| 1BC51 | ◁ | DUPLOYAN LETTER U | <ul style="list-style-type: none"> • character rotates to match entry angle of preceding consonant • character has primary orientation (right and up) = Romanian stenographic letter en → 1BC38 ↙ duployan letter w → 1BC56 ◊ duployan letter romanian u → 1BC55 ∩ duployan letter long u |
| 1BC52 | ∨ | DUPLOYAN LETTER EU | <ul style="list-style-type: none"> • character rotates to match entry angle of preceding consonant • character has secondary orientation (left and down) • in French usage, may be rendered with a dot contextually = Romanian stenographic letter an |
| 1BC53 | ◁ | DUPLOYAN LETTER XW | = Perrault uh <ul style="list-style-type: none"> • not French eu |
| 1BC54 | ∩ | DUPLOYAN LETTER U N | → 1BC1A ∩ duployan letter n |

Other vowels

| | | | |
|-------|---|-----------------------------------|--|
| 1BC55 | ◊ | DUPLOYAN LETTER LONG U | <ul style="list-style-type: none"> • Pernin, Perrault • this vowel does not rotate to match entry angle of preceding consonant → 1BC51 ◁ duployan letter u |
| 1BC56 | ◊ | DUPLOYAN LETTER ROMANIAN U | |
| 1BC57 | ∅ | DUPLOYAN LETTER UH | <ul style="list-style-type: none"> • Sloan → 1BC5B ◊ duployan letter ou |
| 1BC58 | ∅ | DUPLOYAN LETTER SLOAN U | → 1BC5B ◊ duployan letter ou |
| 1BC59 | ∅ | DUPLOYAN LETTER OOH | <ul style="list-style-type: none"> • Sloan → 1BC5B ◊ duployan letter ou |

Dotted-circle vowels

| | | | |
|-------|---|---------------------------|--|
| 1BC5A | ◊ | DUPLOYAN LETTER OW | <ul style="list-style-type: none"> • should not be used for Romanian u ≈ <medial> 1BC56 ◊ |
| 1BC5B | ◊ | DUPLOYAN LETTER OU | <ul style="list-style-type: none"> • should not be used for Perrault ow ≈ <initial, final> 1BC5A ◊ = Chinook letter oo → 1BC57 ∅ duployan letter uh → 1BC58 ∅ duployan letter sloan u → 1BC59 ∅ duployan letter ooh |

Compound vowels

| | | | |
|-------|---|----------------------------|---|
| 1BC5C | ◊ | DUPLOYAN LETTER WA | <ul style="list-style-type: none"> • Chinook • Not Romanian o+a = Perrault letter oy • Chinook number hundreds |
| 1BC5D | ◊ | DUPLOYAN LETTER WO | <ul style="list-style-type: none"> • Chinook |
| 1BC5E | ◊ | DUPLOYAN LETTER WI | <ul style="list-style-type: none"> • Chinook |
| 1BC5F | ◊ | DUPLOYAN LETTER WEI | <ul style="list-style-type: none"> • Salishan |
| 1BC60 | ◊ | DUPLOYAN LETTER WOW | <ul style="list-style-type: none"> • Salishan |

Basic nasal vowels

| | | |
|-------|---|--|
| 1BC61 | ↖ | DUPLOYAN LETTER NASAL U <ul style="list-style-type: none"> • character positions diacritically, as an orienting vowel, or as an invariant vowel • secondary orientation • invariant direction downwards • French number 1 = Pernin letter in = Consolidated Duployan affix int-r- |
| 1BC62 | ↘ | DUPLOYAN LETTER NASAL O <ul style="list-style-type: none"> • character positions diacritically, as an orienting vowel, or as an invariant vowel • neutral nasal vowel for transcription of an ambiguous secondary orienting nasal vowel • secondary orientation • invariant direction upwards = Pernin letter om = Perrault letters an, en, in, un (with accents) = Pernin letter im = Consolidated Duployan affix int-r- |
| 1BC63 | ↙ | DUPLOYAN LETTER NASAL I <ul style="list-style-type: none"> • character positions diacritically, as an orienting vowel, or as an invariant vowel • primary orientation • invariant direction downwards • Romanian multiplicative number prefix = Pernin letter im = Consolidated Duployan affix int-r- |
| 1BC64 | ↗ | DUPLOYAN LETTER NASAL A <ul style="list-style-type: none"> • Perrault vocalic n - an, en, in, un (with accents) • character positions diacritically, as an orienting vowel, or as an invariant vowel • neutral nasal vowel for transcription of an ambiguous primary orienting nasal vowel • primary orientation • invariant direction upwards = Pernin letter on = Romanian stenographic letter yn |

Additional nasal vowels

| | | |
|-------|---|--|
| 1BC65 | ↘ | DUPLOYAN LETTER PERNIN AN <ul style="list-style-type: none"> • written downwards |
| 1BC66 | ↗ | DUPLOYAN LETTER PERNIN AM <ul style="list-style-type: none"> • written downwards |
| 1BC67 | ↖ | DUPLOYAN LETTER SLOAN EN |
| 1BC68 | ↘ | DUPLOYAN LETTER SLOAN AN |
| 1BC69 | ↗ | DUPLOYAN LETTER SLOAN ON |
| 1BC6A | ↘ | DUPLOYAN LETTER VOCALIC M <ul style="list-style-type: none"> • primary orienting vowel = Perrault letters am, em, im, um (with accents) |

Attached affixes

| | | |
|-------|---|---|
| 1BC70 | ↔ | DUPLOYAN AFFIX LEFT HORIZONTAL SECANT <ul style="list-style-type: none"> = Pernin Reporters' extra- • dots show position on base glyph and are not rendered → 1BC08 — duployan letter d |
| 1BC71 | ↔ | DUPLOYAN AFFIX MID HORIZONTAL SECANT <ul style="list-style-type: none"> = Pernin Reporters' inter- • dots show position on base glyph and are not rendered → 1BC08 — duployan letter d |

| | | |
|-------|---|--|
| 1BC72 | ↔ | DUPLOYAN AFFIX RIGHT HORIZONTAL SECANT <ul style="list-style-type: none"> = Pernin Reporters' contra- • dots show position on base glyph and are not rendered → 1BC08 — duployan letter d |
| 1BC73 | ↑ | DUPLOYAN AFFIX LOW VERTICAL SECANT <ul style="list-style-type: none"> = Pernin Reporters' sub- • dots show position on base glyph and are not rendered → 1BC07 duployan letter b |
| 1BC74 | ↑ | DUPLOYAN AFFIX MID VERTICAL SECANT <ul style="list-style-type: none"> = Pernin Reporters' trans- • dots show position on base glyph and are not rendered → 1BC07 duployan letter b |
| 1BC75 | ↑ | DUPLOYAN AFFIX HIGH VERTICAL SECANT <ul style="list-style-type: none"> = Pernin Reporters' super- • dots show position on base glyph and are not rendered → 1BC07 duployan letter b |
| 1BC76 | ↗ | DUPLOYAN AFFIX ATTACHED SECANT <ul style="list-style-type: none"> • dots show position on and relative orientation to base glyph and are not rendered • as a prefix, takes opposite relative position to following glyph • generally crosses adjacent character at perpendicular, but has a bias towards SW/NE angle to contrast 1BC77 ↗ • default neutral secant affix = French suffix -anse = Pernin prefix pre- = Sloan affix ax-/ext |
| 1BC77 | ↗ | DUPLOYAN AFFIX ATTACHED LEFT-TO-RIGHT SECANT <ul style="list-style-type: none"> • dots show position on and relative orientation to base glyph and are not rendered • generally crosses adjacent character at perpendicular, but has a bias towards NW/SE angle to contrast 1BC76 ↗ • as a suffix, takes opposite relative position to following glyph = Pernin prefix per- |
| 1BC78 | ↗ | DUPLOYAN AFFIX ATTACHED TANGENT <ul style="list-style-type: none"> • dots show position on and relative orientation to base glyph and are not rendered • as a prefix, takes opposite relative position to following glyph = French suffix -tan = Romanian shorthand letter str-/str |
| 1BC79 | ↘ | DUPLOYAN AFFIX ATTACHED TAIL <ul style="list-style-type: none"> • orienting character = French suffix -sionaire |
| 1BC7A | ↘ | DUPLOYAN AFFIX ATTACHED E HOOK <ul style="list-style-type: none"> • glyph is retrograde and opens up or down, dependent on preceding letter • dots show position of preceding glyph and are not rendered → 1BC47 ↘ duployan letter e = French suffix -te |

| | |
|-------|---|
| 1BC7B | <p>DUPLOYAN AFFIX ATTACHED I HOOK</p> <ul style="list-style-type: none"> glyph is retrograde and opens left or right, dependent on preceding letter dots show position of preceding glyph and are not rendered → 1BC46 ◀ duployan letter i = French suffix -tou = Sloan affix irre-/ary |
| 1BC7C | <p>DUPLOYAN AFFIX ATTACHED TANGENT HOOK</p> <ul style="list-style-type: none"> attached affix dots show position on and relative orientation to base glyph and are not rendered = Romanian affix ist-/ism = Consolidated Duployan prefix t-r- |

High affixes

| | |
|-------|---|
| 1BC80 | <p>DUPLOYAN AFFIX HIGH ACUTE</p> <ul style="list-style-type: none"> = French suffix -ment = Romanian suffix -mant = Pernin sub- = Pernin Reporters' suffix pro- → 02CA ^ modifier letter acute accent |
| 1BC81 | <p>DUPLOYAN AFFIX HIGH TIGHT ACUTE</p> <ul style="list-style-type: none"> = Pernin Pro- • as a suffix, placed above and to the right of the following letter |
| 1BC82 | <p>DUPLOYAN AFFIX HIGH GRAVE</p> <ul style="list-style-type: none"> = French suffix -ien = Pernin suffix con- → 02CB ` modifier letter grave accent |
| 1BC83 | <p>DUPLOYAN AFFIX HIGH LONG GRAVE</p> <ul style="list-style-type: none"> = Pernin contra- |
| 1BC84 | <p>DUPLOYAN AFFIX HIGH DOT</p> <ul style="list-style-type: none"> • not Romanian hundreds - use U+0307 ◌̇ combining dot above and U+0308 ◌̈ combining diaeresis • French number thousands = French suffix -eur = Romanian shorthand affix trans-/lui → 02D9 ` dot above |
| 1BC85 | <p>DUPLOYAN AFFIX HIGH CIRCLE</p> <ul style="list-style-type: none"> • not Romanian number grade or percent suffix • French ordinal number = French suffix -euse → 00B0 ° degree sign → 02DA ° ring above |
| 1BC86 | <p>DUPLOYAN AFFIX HIGH LINE</p> <ul style="list-style-type: none"> = French suffix -iste = Romanian shorthand affix -tor = Pernin affix dis- → 02C9 ¯ modifier letter macron |
| 1BC87 | <p>DUPLOYAN AFFIX HIGH WAVE</p> <ul style="list-style-type: none"> = French suffix -ificatif → 02DC ~ small tilde |
| 1BC88 | <p>DUPLOYAN AFFIX HIGH VERTICAL</p> <ul style="list-style-type: none"> • also functions as attached affix vertical up with ZWJ • this affix is about half as long as Duployan letter p • as a prefix, has falling stroke direction = Pernin ZWJ + -ime = Sloan tele- → 1BC02 † duployan letter p |

Low affixes

| | |
|-------|---|
| 1BC90 | <p>DUPLOYAN AFFIX LOW ACUTE</p> <ul style="list-style-type: none"> = French suffix -cion = Pernin prefix ex- → 02CF , modifier letter low acute accent |
| 1BC91 | <p>DUPLOYAN AFFIX LOW TIGHT ACUTE</p> <ul style="list-style-type: none"> = Pernin suf-, sug- • as a suffix, placed under and to the right of the following letter |
| 1BC92 | <p>DUPLOYAN AFFIX LOW GRAVE</p> <ul style="list-style-type: none"> = French suffix -ion • French number millions → 02CE \ modifier letter low grave accent |
| 1BC93 | <p>DUPLOYAN AFFIX LOW LONG GRAVE</p> <ul style="list-style-type: none"> = Pernin extra- |
| 1BC94 | <p>DUPLOYAN AFFIX LOW DOT</p> <ul style="list-style-type: none"> = French suffix -ie • French iterative number = Romanian shorthand affix inter- • not Romanian millions - see U+0323 ◌◌ combining dot below and U+0324 ◌◌ combining diaeresis below |
| 1BC95 | <p>DUPLOYAN AFFIX LOW CIRCLE</p> <ul style="list-style-type: none"> = French suffix -iere • French percent → 02F3 ◌ modifier letter low ring |
| 1BC96 | <p>DUPLOYAN AFFIX LOW LINE</p> <ul style="list-style-type: none"> = French suffix -isme = Pernin affix mis- → 02D7 - modifier letter minus sign |
| 1BC97 | <p>DUPLOYAN AFFIX LOW WAVE</p> <ul style="list-style-type: none"> = French suffix -ification → 02F7 ~ modifier letter low tilde |
| 1BC98 | <p>DUPLOYAN AFFIX LOW VERTICAL</p> <ul style="list-style-type: none"> • functions as attached affix vertical down with ZWJ • this affix is about half as long as Duployan the letter p • as a prefix, has rising stroke direction = Pernin ZWJ + -ine → 1BC02 † duployan letter p |
| 1BC99 | <p>DUPLOYAN AFFIX LOW ARROW</p> <ul style="list-style-type: none"> = Romanian prefix sub- • low affix |

Chinook sign

| | |
|-------|--|
| 1BC9C | <p>DUPLOYAN SIGN O WITH CROSS</p> <ul style="list-style-type: none"> • Chinook Likalisti |
|-------|--|

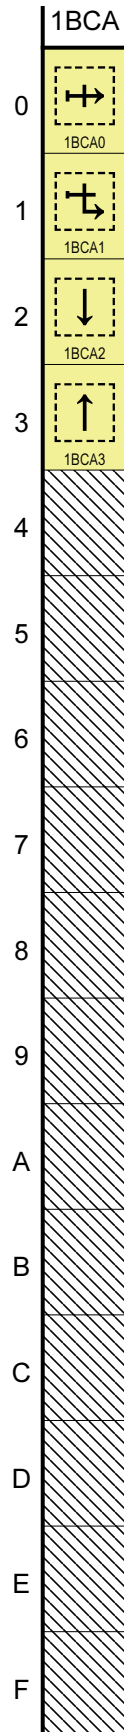
Sloan R-form selector

| | |
|-------|--|
| 1BC9D | <p>DUPLOYAN THICK LETTER SELECTOR</p> <ul style="list-style-type: none"> • commonly abbreviated DTLS • Sloan r-flavored letters • Shape shown is arbitrary and is not visibly rendered • Causes previous Duployan character to be rendered bold |
|-------|--|





Shorthand double mark**1BC9E ≠ DUPLOYAN DOUBLE MARK**

- Dots show position on and relative orientation to base glyph and are not rendered
- Romanian, Sloan shorthands
- Should be used with m, n, j, and s for the Romanian word signs mai mult, nu nu, ceea ce, and sa se
- Can be doubled and tripled

Chinook punctuation**1BC9F = DUPLOYAN PUNCTUATION CHINOOK FULL STOP**



Shorthand format controls

- 1BCA0  **SHORTHAND FORMAT LETTER OVERLAP**
 - shape shown is arbitrary and is not visibly rendered
- 1BCA1  **SHORTHAND FORMAT CONTINUING OVERLAP**
 - shape shown is arbitrary and is not visibly rendered
- 1BCA2  **SHORTHAND FORMAT DOWN STEP**
 - = Romanian shorthand affix -tsion-
 - = Sloan contracted ending oo/o + ZWSP
 - shape shown is arbitrary and is not visibly rendered
- 1BCA3  **SHORTHAND FORMAT UP STEP**
 - = Sloan contracted ending uh/au/ai + ZWSP
 - shape shown is arbitrary and is not visibly rendered

| | 1F10 | 1F11 | 1F12 | 1F13 | 1F14 | 1F15 | 1F16 | 1F17 | 1F18 | 1F19 | 1F1A | 1F1B | 1F1C | 1F1D | 1F1E | 1F1F |
|---|--------------------|---------------------|----------------------|-------------------|---------------------|-------------------|-------------------|-------------------|--------------------|----------------------|------|------|------|------|-------------------|-------------------|
| 0 | 0. 1F100 | (A) 1F110 | (Q) 1F120 | A 1F130 | Q 1F140 | A 1F150 | Q 1F160 | A 1F170 | Q 1F180 | DJ 1F190 | | | | | | K 1F1F0 |
| 1 | 0, 1F101 | (B) 1F111 | (R) 1F121 | B 1F131 | R 1F141 | B 1F151 | R 1F161 | B 1F171 | R 1F181 | CL 1F191 | | | | | | L 1F1F1 |
| 2 | 1, 1F102 | (C) 1F112 | (S) 1F122 | C 1F132 | S 1F142 | C 1F152 | S 1F162 | C 1F172 | S 1F182 | COOL 1F192 | | | | | | M 1F1F2 |
| 3 | 2, 1F103 | (D) 1F113 | (T) 1F123 | D 1F133 | T 1F143 | D 1F153 | T 1F163 | D 1F173 | T 1F183 | FREE 1F193 | | | | | | N 1F1F3 |
| 4 | 3, 1F104 | (E) 1F114 | (U) 1F124 | E 1F134 | U 1F144 | E 1F154 | U 1F164 | E 1F174 | U 1F184 | ID 1F194 | | | | | | O 1F1F4 |
| 5 | 4, 1F105 | (F) 1F115 | (V) 1F125 | F 1F135 | V 1F145 | F 1F155 | V 1F165 | F 1F175 | V 1F185 | NEW 1F195 | | | | | | P 1F1F5 |
| 6 | 5, 1F106 | (G) 1F116 | (W) 1F126 | G 1F136 | W 1F146 | G 1F156 | W 1F166 | G 1F176 | W 1F186 | NG 1F196 | | | | | A 1F1E6 | Q 1F1F6 |
| 7 | 6, 1F107 | (H) 1F117 | (X) 1F127 | H 1F137 | X 1F147 | H 1F157 | X 1F167 | H 1F177 | X 1F187 | OK 1F197 | | | | | B 1F1E7 | R 1F1F7 |
| 8 | 7, 1F108 | (I) 1F118 | (Y) 1F128 | I 1F138 | Y 1F148 | I 1F158 | Y 1F168 | I 1F178 | Y 1F188 | SOS 1F198 | | | | | C 1F1E8 | S 1F1F8 |
| 9 | 8, 1F109 | (J) 1F119 | (Z) 1F129 | J 1F139 | Z 1F149 | J 1F159 | Z 1F169 | J 1F179 | Z 1F189 | UPI! 1F199 | | | | | D 1F1E9 | T 1F1F9 |
| A | 9, 1F10A | (K) 1F11A | (S) 1F12A | K 1F13A | HV 1F14A | K 1F15A | MC 1F16A | K 1F17A | R 1F18A | VS 1F19A | | | | | E 1F1EA | U 1F1FA |
| B | ⓪ 1F10B | (L) 1F11B | (C) 1F12B | L 1F13B | MV 1F14B | L 1F15B | MD 1F16B | L 1F17B | IC 1F18B | | | | | | F 1F1EB | V 1F1FB |
| C | ⓪ 1F10C | (M) 1F11C | (R) 1F12C | M 1F13C | SD 1F14C | M 1F15C | | M 1F17C | PA 1F18C | | | | | | G 1F1EC | W 1F1FC |
| D | | (N) 1F11D | (CD) 1F12D | N 1F13D | SS 1F14D | N 1F15D | | N 1F17D | SA 1F18D | | | | | | H 1F1ED | X 1F1FD |
| E | | (O) 1F11E | (Wz) 1F12E | O 1F13E | PPV 1F14E | O 1F15E | | O 1F17E | AB 1F18E | | | | | | I 1F1EE | Y 1F1FE |
| F | | (P) 1F11F | | P 1F13F | WC 1F14F | P 1F15F | | P 1F17F | WC 1F18F | | | | | | J 1F1EF | Z 1F1FF |

Number with full stop

This symbol completes the set of numbers with full stop starting at U+2488.

1F100 **0**. DIGIT ZERO FULL STOP
≈ 0030 **0** 002E .

Numbers with comma

1F101 **0**, DIGIT ZERO COMMA
≈ 0030 **0** 002C ,
1F102 **1**, DIGIT ONE COMMA
≈ 0031 **1** 002C ,
1F103 **2**, DIGIT TWO COMMA
≈ 0032 **2** 002C ,
1F104 **3**, DIGIT THREE COMMA
≈ 0033 **3** 002C ,
1F105 **4**, DIGIT FOUR COMMA
≈ 0034 **4** 002C ,
1F106 **5**, DIGIT FIVE COMMA
≈ 0035 **5** 002C ,
1F107 **6**, DIGIT SIX COMMA
≈ 0036 **6** 002C ,
1F108 **7**, DIGIT SEVEN COMMA
≈ 0037 **7** 002C ,
1F109 **8**, DIGIT EIGHT COMMA
≈ 0038 **8** 002C ,
1F10A **9**, DIGIT NINE COMMA
≈ 0039 **9** 002C ,

Circled sans-serif digits

These digits complement the sans-serif digit sets in the Dingbat block 2780-2789 and 278A-2793.

1F10B **⓪** DINGBAT CIRCLED SANS-SERIF DIGIT ZERO
1F10C **Ⓛ** DINGBAT NEGATIVE CIRCLED SANS-SERIF DIGIT ZERO

Parenthesized Latin letters

This set provides uppercase versions of the set starting at U+249C.

1F110 **(A)** PARENTHESIZED LATIN CAPITAL LETTER A
≈ 0028 (0041 **A** 0029)
1F111 **(B)** PARENTHESIZED LATIN CAPITAL LETTER B
≈ 0028 (0042 **B** 0029)
1F112 **(C)** PARENTHESIZED LATIN CAPITAL LETTER C
≈ 0028 (0043 **C** 0029)
1F113 **(D)** PARENTHESIZED LATIN CAPITAL LETTER D
≈ 0028 (0044 **D** 0029)
1F114 **(E)** PARENTHESIZED LATIN CAPITAL LETTER E
≈ 0028 (0045 **E** 0029)
1F115 **(F)** PARENTHESIZED LATIN CAPITAL LETTER F
≈ 0028 (0046 **F** 0029)
1F116 **(G)** PARENTHESIZED LATIN CAPITAL LETTER G
≈ 0028 (0047 **G** 0029)
1F117 **(H)** PARENTHESIZED LATIN CAPITAL LETTER H
≈ 0028 (0048 **H** 0029)
1F118 **(I)** PARENTHESIZED LATIN CAPITAL LETTER I
≈ 0028 (0049 **I** 0029)
1F119 **(J)** PARENTHESIZED LATIN CAPITAL LETTER J
≈ 0028 (004A **J** 0029)
1F11A **(K)** PARENTHESIZED LATIN CAPITAL LETTER K
≈ 0028 (004B **K** 0029)
1F11B **(L)** PARENTHESIZED LATIN CAPITAL LETTER L
≈ 0028 (004C **L** 0029)

1F11C **(M)** PARENTHESIZED LATIN CAPITAL LETTER M
≈ 0028 (004D **M** 0029)
1F11D **(N)** PARENTHESIZED LATIN CAPITAL LETTER N
≈ 0028 (004E **N** 0029)
1F11E **(O)** PARENTHESIZED LATIN CAPITAL LETTER O
≈ 0028 (004F **O** 0029)
1F11F **(P)** PARENTHESIZED LATIN CAPITAL LETTER P
≈ 0028 (0050 **P** 0029)
1F120 **(Q)** PARENTHESIZED LATIN CAPITAL LETTER Q
≈ 0028 (0051 **Q** 0029)
1F121 **(R)** PARENTHESIZED LATIN CAPITAL LETTER R
≈ 0028 (0052 **R** 0029)
1F122 **(S)** PARENTHESIZED LATIN CAPITAL LETTER S
≈ 0028 (0053 **S** 0029)
1F123 **(T)** PARENTHESIZED LATIN CAPITAL LETTER T
≈ 0028 (0054 **T** 0029)
1F124 **(U)** PARENTHESIZED LATIN CAPITAL LETTER U
≈ 0028 (0055 **U** 0029)
1F125 **(V)** PARENTHESIZED LATIN CAPITAL LETTER V
≈ 0028 (0056 **V** 0029)
1F126 **(W)** PARENTHESIZED LATIN CAPITAL LETTER W
≈ 0028 (0057 **W** 0029)
1F127 **(X)** PARENTHESIZED LATIN CAPITAL LETTER X
≈ 0028 (0058 **X** 0029)
1F128 **(Y)** PARENTHESIZED LATIN CAPITAL LETTER Y
≈ 0028 (0059 **Y** 0029)
1F129 **(Z)** PARENTHESIZED LATIN CAPITAL LETTER Z
≈ 0028 (005A **Z** 0029)

Latin letter with tortoise shell brackets

1F12A **[S]** TORTOISE SHELL BRACKETED LATIN CAPITAL LETTER S
• used in baseball scoring
≈ 3014 (0053 **S** 3015)

Circled italic Latin letters

1F12B **©** CIRCLED ITALIC LATIN CAPITAL LETTER C
= compact disc, single disc record
≈ <circle> 0043 **C**
1F12C **®** CIRCLED ITALIC LATIN CAPITAL LETTER R
= disc record
≈ <circle> 0052 **R**

Circled Latin letter sequences

1F12D **Ⓒ** CIRCLED CD
→ 33C5 **cd** square **cd**
≈ <circle> 0043 **C** 0044 **D**
1F12E **Ⓜ** CIRCLED WZ
• from the German term “Warenzeichen”
• indicate a trademarked term without making a legal claim of trademark status
→ 2122 **™** trade mark sign
≈ <circle> 0057 **W** 005A **Z**






Squared Latin letters

1F130 **Ⓐ** SQUARED LATIN CAPITAL LETTER A
= Anreisetag (day of arrival)
≈ <square> 0041 **A**
1F131 **Ⓑ** SQUARED LATIN CAPITAL LETTER B
= bank
= b-mode stereo compression broadcasting service (ARIB STD B24)
≈ <square> 0042 **B**
1F132 **Ⓒ** SQUARED LATIN CAPITAL LETTER C
≈ <square> 0043 **C**

- 1F133 **D** SQUARED LATIN CAPITAL LETTER D
≈ <square> 0044 **D**
- 1F134 **E** SQUARED LATIN CAPITAL LETTER E
≈ <square> 0045 **E**
- 1F135 **F** SQUARED LATIN CAPITAL LETTER F
≈ <square> 0046 **F**
- 1F136 **G** SQUARED LATIN CAPITAL LETTER G
≈ <square> 0047 **G**
- 1F137 **H** SQUARED LATIN CAPITAL LETTER H
≈ <square> 0048 **H**
- 1F138 **I** SQUARED LATIN CAPITAL LETTER I
≈ <square> 0049 **I**
- 1F139 **J** SQUARED LATIN CAPITAL LETTER J
≈ <square> 004A **J**
- 1F13A **K** SQUARED LATIN CAPITAL LETTER K
≈ <square> 004B **K**
- 1F13B **L** SQUARED LATIN CAPITAL LETTER L
≈ <square> 004C **L**
- 1F13C **M** SQUARED LATIN CAPITAL LETTER M
≈ <square> 004D **M**
- 1F13D **N** SQUARED LATIN CAPITAL LETTER N
= news (ARIB STD B24)
≈ <square> 004E **N**
- 1F13E **O** SQUARED LATIN CAPITAL LETTER O
≈ <square> 004F **O**
- 1F13F **P** SQUARED LATIN CAPITAL LETTER P
= progressive broadcasting (ARIB STD B24)
≈ <square> 0050 **P**
- 1F140 **Q** SQUARED LATIN CAPITAL LETTER Q
≈ <square> 0051 **Q**
- 1F141 **R** SQUARED LATIN CAPITAL LETTER R
≈ <square> 0052 **R**
- 1F142 **S** SQUARED LATIN CAPITAL LETTER S
= stereo broadcasting service (ARIB STD B24)
≈ <square> 0053 **S**
- 1F143 **T** SQUARED LATIN CAPITAL LETTER T
= tobacconist
≈ <square> 0054 **T**
- 1F144 **U** SQUARED LATIN CAPITAL LETTER U
≈ <square> 0055 **U**
- 1F145 **V** SQUARED LATIN CAPITAL LETTER V
≈ <square> 0056 **V**
- 1F146 **W** SQUARED LATIN CAPITAL LETTER W
= wide-format 16:9 broadcasting service (ARIB
STD B24)
≈ <square> 0057 **W**
- 1F147 **X** SQUARED LATIN CAPITAL LETTER X
≈ <square> 0058 **X**
- 1F148 **Y** SQUARED LATIN CAPITAL LETTER Y
≈ <square> 0059 **Y**
- 1F149 **Z** SQUARED LATIN CAPITAL LETTER Z
≈ <square> 005A **Z**
- 1F14A **HV** SQUARED HV
= hdtv
≈ <square> 0048 **H** 0056 **V**
- 1F14B **MV** SQUARED MV
= multi-view television
≈ <square> 004D **M** 0056 **V**
- 1F14C **SD** SQUARED SD
= sdtv
≈ <square> 0053 **S** 0044 **D**

- 1F14D **SS** SQUARED SS
= surround stereo broadcasting service
≈ <square> 0053 **S** 0053 **S**
- 1F14E **PPV** SQUARED PPV
= pay-per-view
≈ <square> 0050 **P** 0050 **P** 0056 **V**
- 1F14F **WC** SQUARED WC
= water closet, public toilet
≈ <square> 0057 **W** 0043 **C**

White on black circled Latin letters

- 1F150 **A** NEGATIVE CIRCLED LATIN CAPITAL LETTER A
= airport
- 1F151 **B** NEGATIVE CIRCLED LATIN CAPITAL LETTER B
- 1F152 **C** NEGATIVE CIRCLED LATIN CAPITAL LETTER C
- 1F153 **D** NEGATIVE CIRCLED LATIN CAPITAL LETTER D
- 1F154 **E** NEGATIVE CIRCLED LATIN CAPITAL LETTER E
- 1F155 **F** NEGATIVE CIRCLED LATIN CAPITAL LETTER F
= ferry
- 1F156 **G** NEGATIVE CIRCLED LATIN CAPITAL LETTER G
- 1F157 **H** NEGATIVE CIRCLED LATIN CAPITAL LETTER H
= hotel (ARIB STD B24)
- 1F158 **I** NEGATIVE CIRCLED LATIN CAPITAL LETTER I
- 1F159 **J** NEGATIVE CIRCLED LATIN CAPITAL LETTER J
- 1F15A **K** NEGATIVE CIRCLED LATIN CAPITAL LETTER K
= Kurort (spa)
→ 2668  hot springs
- 1F15B **L** NEGATIVE CIRCLED LATIN CAPITAL LETTER L
= light rail
→ 1F688  light rail
- 1F15C **M** NEGATIVE CIRCLED LATIN CAPITAL LETTER M
= metro
→ 1F687  metro
- 1F15D **N** NEGATIVE CIRCLED LATIN CAPITAL LETTER N
- 1F15E **O** NEGATIVE CIRCLED LATIN CAPITAL LETTER O
- 1F15F **P** NEGATIVE CIRCLED LATIN CAPITAL LETTER P
= parking space (ARIB STD B24)
- 1F160 **Q** NEGATIVE CIRCLED LATIN CAPITAL LETTER Q
- 1F161 **R** NEGATIVE CIRCLED LATIN CAPITAL LETTER R
= Raststätte (rest stop)
- 1F162 **S** NEGATIVE CIRCLED LATIN CAPITAL LETTER S
= Stadtbahn (metropolitan railway)
- 1F163 **T** NEGATIVE CIRCLED LATIN CAPITAL LETTER T
= Tankstelle (petrol station)
→ 26FD  fuel pump
- 1F164 **U** NEGATIVE CIRCLED LATIN CAPITAL LETTER U
= underground rail
→ 1F687  metro
- 1F165 **V** NEGATIVE CIRCLED LATIN CAPITAL LETTER V
- 1F166 **W** NEGATIVE CIRCLED LATIN CAPITAL LETTER W
- 1F167 **X** NEGATIVE CIRCLED LATIN CAPITAL LETTER X
- 1F168 **Y** NEGATIVE CIRCLED LATIN CAPITAL LETTER Y
- 1F169 **Z** NEGATIVE CIRCLED LATIN CAPITAL LETTER Z

Raised squared Latin sequences

- 1F16A ^{MC} RAISED MC SIGN
= marque de commerce
• used in Canada
→ 2122 TM trade mark sign
≈ <super> 004D **M** 0043 **C**
- 1F16B ^{MD} RAISED MD SIGN
= marque déposée
• used in Canada
→ 00AE [®] registered sign
≈ <super> 004D **M** 0044 **D**

White on black squared Latin letters

The square edges may be slightly rounded.

- 1F170 **A** NEGATIVE SQUARED LATIN CAPITAL LETTER A
= blood type A
- 1F171 **B** NEGATIVE SQUARED LATIN CAPITAL LETTER B
= blood type B
- 1F172 **C** NEGATIVE SQUARED LATIN CAPITAL LETTER C
= centre, city centre
- 1F173 **D** NEGATIVE SQUARED LATIN CAPITAL LETTER D
- 1F174 **E** NEGATIVE SQUARED LATIN CAPITAL LETTER E
- 1F175 **F** NEGATIVE SQUARED LATIN CAPITAL LETTER F
= Feuerwache (fire department)
- 1F176 **G** NEGATIVE SQUARED LATIN CAPITAL LETTER G
- 1F177 **H** NEGATIVE SQUARED LATIN CAPITAL LETTER H
= Haltestelle (bus stop)
→ 1F68F 🚏 bus stop
- 1F178 **I** NEGATIVE SQUARED LATIN CAPITAL LETTER I
- 1F179 **J** NEGATIVE SQUARED LATIN CAPITAL LETTER J
= junction (ARIB STD B24)
- 1F17A **K** NEGATIVE SQUARED LATIN CAPITAL LETTER K
- 1F17B **L** NEGATIVE SQUARED LATIN CAPITAL LETTER L
= leisure center (ARIB STD B24)
- 1F17C **M** NEGATIVE SQUARED LATIN CAPITAL LETTER M
= museum, cultural center (ARIB STD B24)
- 1F17D **N** NEGATIVE SQUARED LATIN CAPITAL LETTER N
- 1F17E **O** NEGATIVE SQUARED LATIN CAPITAL LETTER O
= blood type O
- 1F17F **P** NEGATIVE SQUARED LATIN CAPITAL LETTER P
= parking space empty-full (ARIB STD B24)
- 1F180 **Q** NEGATIVE SQUARED LATIN CAPITAL LETTER Q
- 1F181 **R** NEGATIVE SQUARED LATIN CAPITAL LETTER R
- 1F182 **S** NEGATIVE SQUARED LATIN CAPITAL LETTER S
- 1F183 **T** NEGATIVE SQUARED LATIN CAPITAL LETTER T
- 1F184 **U** NEGATIVE SQUARED LATIN CAPITAL LETTER U
- 1F185 **V** NEGATIVE SQUARED LATIN CAPITAL LETTER V
- 1F186 **W** NEGATIVE SQUARED LATIN CAPITAL LETTER W
- 1F187 **X** NEGATIVE SQUARED LATIN CAPITAL LETTER X
- 1F188 **Y** NEGATIVE SQUARED LATIN CAPITAL LETTER Y
- 1F189 **Z** NEGATIVE SQUARED LATIN CAPITAL LETTER Z
- 1F18A **Ⓜ** CROSSED NEGATIVE SQUARED LATIN CAPITAL LETTER P
= parking space closed
- 1F18B **ℳ** NEGATIVE SQUARED IC
= interchange, ramp
- 1F18C **Ⓟ** NEGATIVE SQUARED PA
= parking area
- 1F18D **Ⓠ** NEGATIVE SQUARED SA
= service area
- 1F18E **Ⓡ** NEGATIVE SQUARED AB
= blood type AB
- 1F18F **Ⓢ** NEGATIVE SQUARED WC
= water closet, public toilet

Squared Latin letter sequences

- 1F190 **DJ** SQUARE DJ
= disc jockey
≈ <square> 0044 **D** 004A **J**
- 1F191 **CL** SQUARED CL
= clear
- 1F192 **COOL** SQUARED COOL
- 1F193 **FREE** SQUARED FREE
= free postage
- 1F194 **ID** SQUARED ID
= identification, ID

- 1F195 **NEW** SQUARED NEW
- 1F196 **NG** SQUARED NG
= no good
- 1F197 **OK** SQUARED OK
- 1F198 **SOS** SQUARED SOS
= search, hunt for missing person
- 1F199 **UPI** SQUARED UP WITH EXCLAMATION MARK
= new information, update
- 1F19A **VS** SQUARED VS
= versus



Regional indicator symbols

































































































































































































































































These characters can be used in pairs to represent regional codes. In some emoji implementations, certain pairs may be recognized and displayed by alternate means; for instance, an implementation might recognize F + R and display this combination with a symbol representing the flag of France.

- 1F1E6 **A** REGIONAL INDICATOR SYMBOL LETTER A
- 1F1E7 **B** REGIONAL INDICATOR SYMBOL LETTER B
- 1F1E8 **C** REGIONAL INDICATOR SYMBOL LETTER C
- 1F1E9 **D** REGIONAL INDICATOR SYMBOL LETTER D
- 1F1EA **E** REGIONAL INDICATOR SYMBOL LETTER E
- 1F1EB **F** REGIONAL INDICATOR SYMBOL LETTER F
- 1F1EC **G** REGIONAL INDICATOR SYMBOL LETTER G
- 1F1ED **H** REGIONAL INDICATOR SYMBOL LETTER H
- 1F1EE **I** REGIONAL INDICATOR SYMBOL LETTER I
- 1F1EF **J** REGIONAL INDICATOR SYMBOL LETTER J
- 1F1F0 **K** REGIONAL INDICATOR SYMBOL LETTER K
- 1F1F1 **L** REGIONAL INDICATOR SYMBOL LETTER L
- 1F1F2 **M** REGIONAL INDICATOR SYMBOL LETTER M
- 1F1F3 **N** REGIONAL INDICATOR SYMBOL LETTER N
- 1F1F4 **O** REGIONAL INDICATOR SYMBOL LETTER O
- 1F1F5 **P** REGIONAL INDICATOR SYMBOL LETTER P
- 1F1F6 **Q** REGIONAL INDICATOR SYMBOL LETTER Q
- 1F1F7 **R** REGIONAL INDICATOR SYMBOL LETTER R
- 1F1F8 **S** REGIONAL INDICATOR SYMBOL LETTER S
- 1F1F9 **T** REGIONAL INDICATOR SYMBOL LETTER T
- 1F1FA **U** REGIONAL INDICATOR SYMBOL LETTER U
- 1F1FB **V** REGIONAL INDICATOR SYMBOL LETTER V
- 1F1FC **W** REGIONAL INDICATOR SYMBOL LETTER W
- 1F1FD **X** REGIONAL INDICATOR SYMBOL LETTER X
- 1F1FE **Y** REGIONAL INDICATOR SYMBOL LETTER Y
- 1F1FF **Z** REGIONAL INDICATOR SYMBOL LETTER Z














| | 1F30 | 1F31 | 1F32 | 1F33 | 1F34 | 1F35 | 1F36 | 1F37 | 1F38 | 1F39 | 1F3A | 1F3B | 1F3C | 1F3D | 1F3E | 1F3F |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|-------|-------|
| 0 | 1F300 | 1F310 | 1F320 | 1F330 | 1F340 | 1F350 | 1F360 | 1F370 | 1F380 | 1F390 | 1F3A0 | 1F3B0 | 1F3C0 | | 1F3E0 | 1F3F0 |
| 1 | 1F301 | 1F311 | 1F321 | 1F331 | 1F341 | 1F351 | 1F361 | 1F371 | 1F381 | 1F391 | 1F3A1 | 1F3B1 | 1F3C1 | | 1F3E1 | 1F3F1 |
| 2 | 1F302 | 1F312 | 1F322 | 1F332 | 1F342 | 1F352 | 1F362 | 1F372 | 1F382 | 1F392 | 1F3A2 | 1F3B2 | 1F3C2 | | 1F3E2 | 1F3F2 |
| 3 | 1F303 | 1F313 | 1F323 | 1F333 | 1F343 | 1F353 | 1F363 | 1F373 | 1F383 | 1F393 | 1F3A3 | 1F3B3 | 1F3C3 | | 1F3E3 | 1F3F3 |
| 4 | 1F304 | 1F314 | 1F324 | 1F334 | 1F344 | 1F354 | 1F364 | 1F374 | 1F384 | 1F394 | 1F3A4 | 1F3B4 | 1F3C4 | | 1F3E4 | 1F3F4 |
| 5 | 1F305 | 1F315 | 1F325 | 1F335 | 1F345 | 1F355 | 1F365 | 1F375 | 1F385 | 1F395 | 1F3A5 | 1F3B5 | | | 1F3E5 | 1F3F5 |
| 6 | 1F306 | 1F316 | 1F326 | 1F336 | 1F346 | 1F356 | 1F366 | 1F376 | 1F386 | | 1F3A6 | 1F3B6 | 1F3C6 | | 1F3E6 | 1F3F6 |
| 7 | 1F307 | 1F317 | 1F327 | 1F337 | 1F347 | 1F357 | 1F367 | 1F377 | 1F387 | 1F397 | 1F3A7 | 1F3B7 | 1F3C7 | | 1F3E7 | |
| 8 | 1F308 | 1F318 | 1F328 | 1F338 | 1F348 | 1F358 | 1F368 | 1F378 | 1F388 | | 1F3A8 | 1F3B8 | 1F3C8 | | 1F3E8 | |
| 9 | 1F309 | 1F319 | 1F329 | 1F339 | 1F349 | 1F359 | 1F369 | 1F379 | 1F389 | | 1F3A9 | 1F3B9 | 1F3C9 | | 1F3E9 | |
| A | 1F30A | 1F31A | 1F32A | 1F33A | 1F34A | 1F35A | 1F36A | 1F37A | 1F38A | | 1F3AA | 1F3BA | 1F3CA | | 1F3EA | |
| B | 1F30B | 1F31B | 1F32B | 1F33B | 1F34B | 1F35B | 1F36B | 1F37B | 1F38B | | 1F3AB | 1F3BB | | | 1F3EB | |
| C | 1F30C | 1F31C | 1F32C | 1F33C | 1F34C | 1F35C | 1F36C | 1F37C | 1F38C | 1F39C | 1F3AC | 1F3BC | | | 1F3EC | |
| D | 1F30D | 1F31D | | 1F33D | 1F34D | 1F35D | 1F36D | | 1F38D | 1F39D | 1F3AD | 1F3BD | | | 1F3ED | |
| E | 1F30E | 1F31E | | 1F33E | 1F34E | 1F35E | 1F36E | | 1F38E | | 1F3AE | 1F3BE | | | 1F3EE | |
| F | 1F30F | 1F31F | | 1F33F | 1F34F | 1F35F | 1F36F | | 1F38F | | 1F3AF | 1F3BF | | | 1F3EF | |

1F40 1F41 1F42 1F43 1F44 1F45 1F46 1F47 1F48 1F49 1F4A 1F4B 1F4C 1F4D 1F4E 1F4F

| | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|
| 0 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 1 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 2 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 3 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 4 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 5 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 6 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 7 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 8 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 9 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| A |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| B |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| C |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| E |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| F |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

| | 1F50 | 1F51 | 1F52 | 1F53 | 1F54 | 1F55 | 1F56 | 1F57 | 1F58 | 1F59 | 1F5A | 1F5B | 1F5C | 1F5D | 1F5E | 1F5F |
|---|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|
| 0 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 1 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 2 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 3 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 4 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 5 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 6 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 7 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 8 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 9 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| A |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| B |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| C |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| E |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| F |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

















Weather, landscape, and sky symbols

| | | |
|-------|---|---------------------------------|
| 1F300 |  | CYCLONE = typhoon, hurricane |
| 1F301 |  | FOGGY |
| 1F302 |  | CLOSED UMBRELLA |
| 1F303 |  | NIGHT WITH STARS |
| 1F304 |  | SUNRISE OVER MOUNTAINS |
| 1F305 |  | SUNRISE |
| 1F306 |  | CITYSCAPE AT DUSK |
| 1F307 |  | SUNSET OVER BUILDINGS |
| 1F308 |  | RAINBOW |
| 1F309 |  | BRIDGE AT NIGHT |
| 1F30A |  | WATER WAVE |
| 1F30B |  | VOLCANO |
| 1F30C |  | MILKY WAY |





Globe symbols









| | | |
|-------|---|---|
| 1F30D |  | EARTH GLOBE EUROPE-AFRICA |
| 1F30E |  | EARTH GLOBE AMERICAS |
| 1F30F |  | EARTH GLOBE ASIA-AUSTRALIA |
| 1F310 |  | GLOBE WITH MERIDIANS • used to indicate international input source, world clocks with time zones, etc. |

Moon, sun, and star symbols






















| | | |
|-------|---|--|
| 1F311 |  | NEW MOON SYMBOL → 25CF ● black circle |
| 1F312 |  | WAXING CRESCENT MOON SYMBOL |
| 1F313 |  | FIRST QUARTER MOON SYMBOL = half moon → 25D0 ◐ circle with left half black |
| 1F314 |  | WAXING GIBBOUS MOON SYMBOL = waxing moon |
| 1F315 |  | FULL MOON SYMBOL → 25CB ○ white circle |
| 1F316 |  | WANING GIBBOUS MOON SYMBOL |
| 1F317 |  | LAST QUARTER MOON SYMBOL → 25D1 ◑ circle with right half black |
| 1F318 |  | WANING CRESCENT MOON SYMBOL |
| 1F319 |  | CRESCENT MOON • may indicate either the first or last quarter moon → 263D ☾ first quarter moon → 263E ☾ last quarter moon |
| 1F31A |  | NEW MOON WITH FACE |
| 1F31B |  | FIRST QUARTER MOON WITH FACE |
| 1F31C |  | LAST QUARTER MOON WITH FACE |
| 1F31D |  | FULL MOON WITH FACE |
| 1F31E |  | SUN WITH FACE |
| 1F31F |  | GLOWING STAR |
| 1F320 |  | SHOOTING STAR |

Weather symbols













| | | |
|-------|---|---|
| 1F321 |  | THERMOMETER = temperature, warm |
| 1F322 |  | BLACK DROPLET = droplet → 1F4A7 ⚫ droplet |
| 1F323 |  | WHITE SUN = sunny → 263C ☀ white sun with rays |
| 1F324 |  | WHITE SUN WITH SMALL CLOUD = mostly sunny → 26C5 ☁ sun behind cloud |

| | | |
|-------|---|--|
| 1F325 |  | WHITE SUN BEHIND CLOUD = mostly cloudy |
| 1F326 |  | WHITE SUN BEHIND CLOUD WITH RAIN = showers |
| 1F327 |  | CLOUD WITH RAIN = rain |
| 1F328 |  | CLOUD WITH SNOW = snow, snow showers |
| 1F329 |  | CLOUD WITH LIGHTNING = lightning, thunderstorm → 26C8 ⚡ thunder cloud and rain |
| 1F32A |  | CLOUD WITH TORNADO = tornado, twister |
| 1F32B |  | FOG → 1F301 ☁ foggy |
| 1F32C |  | WIND BLOWING FACE |

Plant symbols

| | | |
|-------|---|---------------------------------------|
| 1F330 |  | CHESTNUT |
| 1F331 |  | SEEDLING |
| 1F332 |  | EVERGREEN TREE |
| 1F333 |  | DECIDUOUS TREE |
| 1F334 |  | PALM TREE |
| 1F335 |  | CACTUS |
| 1F336 |  | HOT PEPPER = hot |
| 1F337 |  | TULIP → 2698 🌷 flower |
| 1F338 |  | CHERRY BLOSSOM |
| 1F339 |  | ROSE |
| 1F33A |  | HIBISCUS |
| 1F33B |  | SUNFLOWER |
| 1F33C |  | BLOSSOM = daisy |
| 1F33D |  | EAR OF MAIZE |
| 1F33E |  | EAR OF RICE |
| 1F33F |  | HERB |
| 1F340 |  | FOUR LEAF CLOVER → 2618 🍀 shamrock |
| 1F341 |  | MAPLE LEAF |
| 1F342 |  | FALLEN LEAF |
| 1F343 |  | LEAF FLUTTERING IN WIND |
| 1F344 |  | MUSHROOM |

Fruit and vegetable symbols

| | | |
|-------|---|-------------------------|
| 1F345 |  | TOMATO |
| 1F346 |  | AUBERGINE = eggplant |
| 1F347 |  | GRAPES |
| 1F348 |  | MELON |
| 1F349 |  | WATERMELON |
| 1F34A |  | TANGERINE |
| 1F34B |  | LEMON |
| 1F34C |  | BANANA |
| 1F34D |  | PINEAPPLE |
| 1F34E |  | RED APPLE |
| 1F34F |  | GREEN APPLE |
| 1F350 |  | PEAR |
| 1F351 |  | PEACH |
| 1F352 |  | CHERRIES |
| 1F353 |  | STRAWBERRY |

Food symbols

- 1F354 🍔 HAMBURGER
= fast food place
- 1F355 🍕 SLICE OF PIZZA
- 1F356 🍖 MEAT ON BONE
- 1F357 🍗 POULTRY LEG
- 1F358 🍞 RICE CRACKER
- 1F359 🍡 RICE BALL
- 1F35A 🍛 COOKED RICE
= bowl of rice
- 1F35B 🍛 CURRY AND RICE
= Japanese style curry
- 1F35C 🍜 STEAMING BOWL
= ramen noodles
- 1F35D 🍝 SPAGHETTI
- 1F35E 🍞 BREAD
- 1F35F 🍟 FRENCH FRIES
- 1F360 🍠 ROASTED SWEET POTATO
- 1F361 🍡 DANGO
= mochi balls on skewer
- 1F362 🍡 ODEN
= seafood on skewer
- 1F363 🍣 SUSHI
- 1F364 🍤 FRIED SHRIMP
- 1F365 🍣 FISH CAKE WITH SWIRL DESIGN
- 1F366 🍦 SOFT ICE CREAM
- 1F367 🍧 SHAVED ICE
- 1F368 🍦 ICE CREAM
- 1F369 🍪 DOUGHNUT
- 1F36A 🍪 COOKIE
= biscuit
- 1F36B 🍫 CHOCOLATE BAR
- 1F36C 🍬 CANDY
- 1F36D 🍭 LOLLIPOP
- 1F36E 🍮 CUSTARD
- 1F36F 🍯 HONEY POT
- 1F370 🍰 SHORTCAKE
- 1F371 🍱 BENTO BOX
- 1F372 🍲 POT OF FOOD
- 1F373 🍳 COOKING
= frying pan, cooking utensil
- 1F374 🍴 FORK AND KNIFE
= restaurant, meal
- glyph may show a fork and spoon
 - glyph may show a crossed fork and knife
 - glyph may show a fork and knife with a plate

Beverage symbols

- 1F375 🍵 TEACUP WITHOUT HANDLE
→ 2615 ☕ hot beverage
→ 26FE 🍵 cup on black square
- 1F376 🍶 SAKE BOTTLE AND CUP
- 1F377 🍷 WINE GLASS
- 1F378 🍸 COCKTAIL GLASS
- 1F379 🍹 TROPICAL DRINK
- 1F37A 🍺 BEER MUG
- 1F37B 🍻 CLINKING BEER MUGS
= cheers
- 1F37C 🍼 BABY BOTTLE

Celebration symbols

- 1F380 🎀 RIBBON
- 1F381 📦 WRAPPED PRESENT
→ 1F4E6 📦 package

- 1F382 🎂 BIRTHDAY CAKE
- 1F383 🎃 JACK-O-LANTERN
= Hallowe'en
- 1F384 🎄 CHRISTMAS TREE
- 1F385 🎅 FATHER CHRISTMAS
= Santa Claus
- 1F386 🎆 FIREWORKS
- 1F387 🎇 FIREWORK SPARKLER
• long, stick-like firework that looks like a burning incense stick
- 1F388 🎈 BALLOON
- 1F389 🎉 PARTY POPPER
- 1F38A 🎊 CONFETTI BALL
= congratulations
- 1F38B 🎋 TANABATA TREE
= tanabata tree with wishing papers
- 1F38C 🎌 CROSSED FLAGS
• Japanese national holiday
- 1F38D 🎍 PINE DECORATION
• Japanese new year's door decoration
- 1F38E 🎎 JAPANESE DOLLS
• Japanese Hinamatsuri or girls' doll festival
- 1F38F 🎏 CARP STREAMER
- 1F390 🎐 WIND CHIME
- 1F391 🌕 MOON VIEWING CEREMONY
• Japanese Otsukimi harvest celebration
- 1F392 🎒 SCHOOL SACHEL
• Japanese school entrance ceremony
- 1F393 🎓 GRADUATION CAP
• graduation ceremony
- 1F394 ❤️ HEART WITH TIP ON THE LEFT
= favorite
→ 2665 🖤 black heart suit
- 1F395 🌸 BOUQUET OF FLOWERS
= occasion
→ 1F490 🌸 bouquet
- 1F396 🚫 <reserved>
- 1F397 🎗️ REMINDER RIBBON

Musical symbols

- 1F39C 🎵 BEAMED ASCENDING MUSICAL NOTES
= musical performance
= music, musical background
• always ascending, unlike 266C 🎵
→ 266C 🎵 beamed sixteenth notes
- 1F39D 🎵 BEAMED DESCENDING MUSICAL NOTES
• always descending, unlike 266C 🎵

Entertainment symbols

- 1F3A0 🎡 CAROUSEL HORSE
= amusement park
- 1F3A1 🎢 FERRIS WHEEL
= amusement park
- 1F3A2 🎠 ROLLER COASTER
- 1F3A3 🎣 FISHING POLE AND FISH
= fishing
- 1F3A4 🎤 MICROPHONE
= karaoke
- 1F3A5 🎬 MOVIE CAMERA
= film, movies
- 1F3A6 🎦 CINEMA
= movie theater, movie projector
- 1F3A7 🎧 HEADPHONE
= music

- 1F3A8 🎨 ARTIST PALETTE
= art
- 1F3A9 🎩 TOP HAT
= drama, performing arts, theater
- 1F3AA 🎪 CIRCUS TENT
= event
- 1F3AB 🎫 TICKET
• indicates an event
- 1F3AC 🎬 CLAPPER BOARD
- 1F3AD 🎭 PERFORMING ARTS

Game symbols

- 1F3AE 🎮 VIDEO GAME
= video game controller
- 1F3AF 🎯 DIRECT HIT
= archery target, hitting the target
→ 25CE 🎯 bullseye
- 1F3B0 🎰 SLOT MACHINE
- 1F3B1 🎱 BILLIARDS
- 1F3B2 🎲 GAME DIE
- 1F3B3 🎳 BOWLING
- 1F3B4 🎴 FLOWER PLAYING CARDS
= flower cards

Music symbols

- 1F3B5 🎵 MUSICAL NOTE
= music, being in good mood
→ 266A ♪ eighth note
- 1F3B6 🎶 MULTIPLE MUSICAL NOTES
= dancing notes, mood, melody
→ 266B 🎶 beamed eighth notes
- 1F3B7 🎷 SAXOPHONE
- 1F3B8 🎸 GUITAR
- 1F3B9 🎹 MUSICAL KEYBOARD
- 1F3BA 🎺 TRUMPET
- 1F3BB 🎻 VIOLIN
- 1F3BC 🎼 MUSICAL SCORE
→ 1D11E 🎼 musical symbol g clef

Sport symbols

See other sport symbols in the Miscellaneous Symbols block.

- 1F3BD 🏃 RUNNING SHIRT WITH SASH
- 1F3BE 🎾 TENNIS RACQUET AND BALL
= tennis
- 1F3BF 🎿 SKI AND SKI BOOT
= skiing
→ 26F7 🎿 skier
- 1F3C0 🏀 BASKETBALL AND HOOP
= basketball
- 1F3C1 🏁 CHEQUERED FLAG
= motor sports
- 1F3C2 🏂 SNOWBOARDER
- 1F3C3 🏃 RUNNER
= running, marathon, track and fields
- 1F3C4 🏄 SURFER
= surfing
- 1F3C5 🏠 <reserved>
- 1F3C6 🏆 TROPHY
- 1F3C7 🐎 HORSE RACING
- 1F3C8 🏈 AMERICAN FOOTBALL
- 1F3C9 🏉 RUGBY FOOTBALL
- 1F3CA 🏊 SWIMMER

Building and map symbols

- 1F3E0 🏠 HOUSE BUILDING

- 1F3E1 🏡 HOUSE WITH GARDEN
= home, house with yard
- 1F3E2 🏢 OFFICE BUILDING
- 1F3E3 🇯🇵 JAPANESE POST OFFICE
→ 3012 🇯🇵 postal mark
- 1F3E4 🇪🇺 EUROPEAN POST OFFICE
- 1F3E5 🏥 HOSPITAL
→ 26E8 🇪🇺 black cross on shield
- 1F3E6 🏦 BANK
→ 1F131 🇪🇺 squared latin capital letter b
- 1F3E7 🏧 AUTOMATED TELLER MACHINE
= ATM
- 1F3E8 🏨 HOTEL
→ 1F157 🇪🇺 negative circled latin capital letter h
- 1F3E9 🏩 LOVE HOTEL
- 1F3EA 🏪 CONVENIENCE STORE
- 1F3EB 🏫 SCHOOL
- 1F3EC 🏬 DEPARTMENT STORE
- 1F3ED 🏭 FACTORY
= industrial production site
= date of production
→ 26ED ⚙ gear without hub
- 1F3EE 🏮 IZAKAYA LANTERN
= japanese izakaya restaurant
- 1F3EF 🏯 JAPANESE CASTLE
- 1F3F0 🏰 EUROPEAN CASTLE
→ 26EB 🇪🇺 castle

Flag symbols

- 1F3F1 🚩 WHITE PENNANT
→ 1F6A9 🚩 triangular flag on post
- 1F3F2 🚩 BLACK PENNANT
- 1F3F3 🚩 WAVING WHITE FLAG
= flag
→ 2690 🚩 white flag
- 1F3F4 🚩 WAVING BLACK FLAG

Plant symbols

- 1F3F5 🌸 ROSETTE
→ 2740 🌸 white florette
- 1F3F6 🌸 BLACK ROSETTE
→ 2741 🌸 eight petalled outlined black florette

Animal symbols

- 1F400 🐭 RAT
• first of the signs of the Asian zodiac
- 1F401 🐁 MOUSE
• first of the signs of the Asian zodiac, used in Persia
- 1F402 🐮 OX
• second of the signs of the Asian zodiac
- 1F403 🐃 WATER BUFFALO
• second of the signs of the Asian zodiac, used in Vietnam
- 1F404 🐄 COW
• second of the signs of the Asian zodiac, used in Persia
= beef (on menus)
- 1F405 🐅 TIGER
• third of the signs of the Asian zodiac
- 1F406 🐆 LEOPARD
• third of the signs of the Asian zodiac, used in Persia
- 1F407 🐇 RABBIT
• fourth of the signs of the Asian zodiac

- 1F408 🐈 CAT
• fourth of the signs of the Asian zodiac, used in Vietnam
- 1F409 🐉 DRAGON
• fifth of the signs of the Asian zodiac
- 1F40A 🐊 CROCODILE
• fifth of the signs of the Asian zodiac, used in Persia
- 1F40B 🐳 WHALE
• fifth of the signs of the Asian zodiac, used in Persia
- 1F40C 🐌 SNAIL
• fifth of the signs of the Asian zodiac, used in Kazakhstan
- 1F40D 🐍 SNAKE
• sixth of the signs of the Asian zodiac
- 1F40E 🐎 HORSE
• seventh of the signs of the Asian zodiac
- 1F40F 🐏 RAM
• eighth of the signs of the Asian zodiac
- 1F410 🐐 GOAT
• eighth of the signs of the Asian zodiac, used in Vietnam
- 1F411 🐑 SHEEP
• eighth of the signs of the Asian zodiac, used in Persia
- 1F412 🐒 MONKEY
• ninth of the signs of the Asian zodiac
- 1F413 🐓 ROOSTER
• tenth of the signs of the Asian zodiac
= cock
- 1F414 🐔 CHICKEN
• tenth of the signs of the Asian zodiac, used in Persia
= hen
= poultry (on menus)
- 1F415 🐕 DOG
• eleventh of the signs of the Asian zodiac
- 1F416 🐖 PIG
• twelfth of the signs of the Asian zodiac
= pork (on menus)
- 1F417 🐗 BOAR
• twelfth of the signs of the Asian zodiac, used in Japan
- 1F418 🐘 ELEPHANT
• twelfth of the signs of the Asian zodiac, used in Thailand
- 1F419 🐙 OCTOPUS
- 1F41A 🐚 SPIRAL SHELL
- 1F41B 🐛 BUG
- 1F41C 🐜 ANT
- 1F41D 🐝 HONEYBEE
- 1F41E 🐞 LADY BEETLE
= ladybird, ladybug, coccinellids
- 1F41F 🐟 FISH
- 1F420 🐠 TROPICAL FISH
- 1F421 🐡 BLOWFISH
- 1F422 🐢 TURTLE
- 1F423 🐣 HATCHING CHICK
- 1F424 🐤 BABY CHICK
- 1F425 🐥 FRONT-FACING BABY CHICK
- 1F426 🐦 BIRD
- 1F427 🐧 PENGUIN
- 1F428 🐨 KOALA

- 1F429 🐩 POODLE
- 1F42A 🐪 DROMEDARY CAMEL
• has a single hump
- 1F42B 🐫 BACTRIAN CAMEL
• has two humps
- 1F42C 🐬 DOLPHIN

Animal faces

- 1F42D 🐭 MOUSE FACE
- 1F42E 🐮 COW FACE
- 1F42F 🐯 TIGER FACE
- 1F430 🐰 RABBIT FACE
- 1F431 🐱 CAT FACE
→ 1F63A 😺 smiling cat face with open mouth
- 1F432 🐲 DRAGON FACE
- 1F433 🐳 SPOUTING WHALE
- 1F434 🐎 HORSE FACE
- 1F435 🐵 MONKEY FACE
- 1F436 🐶 DOG FACE
- 1F437 🐷 PIG FACE
- 1F438 🐹 FROG FACE
- 1F439 🐭 HAMSTER FACE
- 1F43A 🐺 WOLF FACE
- 1F43B 🐻 BEAR FACE
- 1F43C 🐼 PANDA FACE
- 1F43D 🐷 PIG NOSE
- 1F43E 🐾 PAW PRINTS
→ 1F463 🐾 footprints

Facial parts symbols

1F440 👁 EYES

1F441 👁 EYE
= sight

1F442 👂 EAR

1F443 👃 NOSE

1F444 👄 MOUTH

1F445 👅 TONGUE

Hand symbols

- 1F446 🖐 WHITE UP POINTING BACKHAND INDEX
→ 261D 🖐 white up pointing index
- 1F447 🖏 WHITE DOWN POINTING BACKHAND INDEX
→ 261F 🖏 white down pointing index
- 1F448 🖐 WHITE LEFT POINTING BACKHAND INDEX
→ 261C 🖐 white left pointing index
- 1F449 🖐 WHITE RIGHT POINTING BACKHAND INDEX
→ 261E 🖐 white right pointing index
- 1F44A 👊 FISTED HAND SIGN
= punch
→ 270A 🖊 raised fist
- 1F44B 🖐 WAVING HAND SIGN
→ 270B 🖐 raised hand
- 1F44C 🖐 OK HAND SIGN
- 1F44D 👍 THUMBS UP SIGN
- 1F44E 👎 THUMBS DOWN SIGN
- 1F44F 🙌 CLAPPING HANDS SIGN
- 1F450 🙏 OPEN HANDS SIGN

Clothing and accessories

- 1F451 👑 CROWN
- 1F452 🎩 WOMANS HAT
- 1F453 🕶 EYEGLASSES
- 1F454 👔 NECKTIE
- 1F455 👕 T-SHIRT

| | | |
|-------|--|---|
| 1F456 | | JEANS |
| 1F457 | | DRESS |
| 1F458 | | KIMONO |
| 1F459 | | BIKINI |
| 1F45A | | WOMANS CLOTHES |
| 1F45B | | PURSE |
| 1F45C | | HANDBAG |
| 1F45D | | POUCH |
| 1F45E | | MANS SHOE |
| 1F45F | | ATHLETIC SHOE = runner, sneaker, tennis shoe |
| 1F460 | | HIGH-HEELED SHOE |
| 1F461 | | WOMANS SANDAL |
| 1F462 | | WOMANS BOOTS |
| 1F463 | | FOOTPRINTS → 1F43E paw prints |

Portrait and role symbols

| | | |
|-------|--|--|
| 1F464 | | BUST IN SILHOUETTE = guest account |
| 1F465 | | BUSTS IN SILHOUETTE = accounts |
| 1F466 | | BOY |
| 1F467 | | GIRL |
| 1F468 | | MAN |
| 1F469 | | WOMAN |
| 1F46A | | FAMILY |
| 1F46B | | MAN AND WOMAN HOLDING HANDS → 1F6BB restroom |
| 1F46C | | TWO MEN HOLDING HANDS |
| 1F46D | | TWO WOMEN HOLDING HANDS |
| 1F46E | | POLICE OFFICER |
| 1F46F | | WOMAN WITH BUNNY EARS |
| 1F470 | | BRIDE WITH VEIL |
| 1F471 | | PERSON WITH BLOND HAIR |
| 1F472 | | MAN WITH GUA PI MAO |
| 1F473 | | MAN WITH TURBAN |
| 1F474 | | OLDER MAN |
| 1F475 | | OLDER WOMAN |
| 1F476 | | BABY |
| 1F477 | | CONSTRUCTION WORKER |

Fairy tale symbols

| | | |
|-------|--|------------------------|
| 1F478 | | PRINCESS |
| 1F479 | | JAPANESE OGRE |
| 1F47A | | JAPANESE GOBLIN |
| 1F47B | | GHOST |
| 1F47C | | BABY ANGEL |
| 1F47D | | EXTRATERRESTRIAL ALIEN |
| 1F47E | | ALIEN MONSTER |
| 1F47F | | IMP |
| 1F480 | | SKULL |

Role symbols

| | | |
|-------|--|-------------------------|
| 1F481 | | INFORMATION DESK PERSON |
| 1F482 | | GUARDSMAN |
| 1F483 | | DANCER |

Personal care symbols

| | | |
|-------|--|--------------------------------------|
| 1F484 | | LIPSTICK |
| 1F485 | | NAIL POLISH = manicure, nail care |
| 1F486 | | FACE MASSAGE |

| | | |
|-------|--|--|
| 1F487 | | HAIRCUT • usually indicates a beauty parlor |
| 1F488 | | BARBER POLE |

Medical symbols

| | | |
|-------|--|---------|
| 1F489 | | SYRINGE |
| 1F48A | | PILL |

Romance symbols


| | | |
|-------|--|--|
| 1F48B | | KISS MARK = lips |
| 1F48C | | LOVE LETTER |
| 1F48D | | RING = jewelry |
| 1F48E | | GEM STONE |
| 1F48F | | KISS = two people kissing |
| 1F490 | | BOUQUET |
| 1F491 | | COUPLE WITH HEART |
| 1F492 | | WEDDING = wedding chapel → 26AD marriage symbol |

Heart symbols

| | | |
|-------|--|---|
| 1F493 | | BEATING HEART |
| 1F494 | | BROKEN HEART |
| 1F495 | | TWO HEARTS |
| 1F496 | | SPARKLING HEART |
| 1F497 | | GROWING HEART |
| 1F498 | | HEART WITH ARROW |
| 1F499 | | BLUE HEART → 2661 white heart suit → 2665 black heart suit → 2764 heavy black heart |
| 1F49A | | GREEN HEART |
| 1F49B | | YELLOW HEART |
| 1F49C | | PURPLE HEART |
| 1F49D | | HEART WITH RIBBON |
| 1F49E | | REVOLVING HEARTS |
| 1F49F | | HEART DECORATION |

Comic style symbols


| | | |
|-------|--|--|
| 1F4A0 | | DIAMOND SHAPE WITH A DOT INSIDE = kawaii, cute • meaning of cuteness is based on association of glyph with shape of a flower → 27D0 white diamond with centred dot |
| 1F4A1 | | ELECTRIC LIGHT BULB = idea |
| 1F4A2 | | ANGER SYMBOL |
| 1F4A3 | | BOMB |
| 1F4A4 | | SLEEPING SYMBOL |
| 1F4A5 | | COLLISION SYMBOL |
| 1F4A6 | | SPLASHING SWEAT SYMBOL = plewds |
| 1F4A7 | | DROPLET • represents a drop of sweat or drop of water |
| 1F4A8 | | DASH SYMBOL = running dash, briffits |
| 1F4A9 | | PILE OF POO = dog dirt |
| 1F4AA | | FLEXED BICEPS = strong, muscled |
| 1F4AB | | DIZZY SYMBOL = circling stars, squeans |

1F4AC  SPEECH BALLOON
= comic book conversation bubble

1F4AD  THOUGHT BALLOON


Japanese school grade symbols


1F4AE  WHITE FLOWER
= brilliant homework
→ 2740  white florette

1F4AF  HUNDRED POINTS SYMBOL
= perfect score


Money symbols

1F4B0  MONEY BAG
• glyph may show any currency symbol instead of a dollar sign


1F4B1  CURRENCY EXCHANGE


1F4B2  HEAVY DOLLAR SIGN
→ 0024 \$ dollar sign

1F4B3  CREDIT CARD

1F4B4  BANKNOTE WITH YEN SIGN

1F4B5  BANKNOTE WITH DOLLAR SIGN

1F4B6  BANKNOTE WITH EURO SIGN

1F4B7  BANKNOTE WITH POUND SIGN


1F4B8  MONEY WITH WINGS

1F4B9  CHART WITH UPWARDS TREND AND YEN SIGN


Office symbols

1F4BA  SEAT


1F4BB  PERSONAL COMPUTER

1F4BC  BRIEFCASE

1F4BD  MINIDISC

1F4BE  FLOPPY DISK
= flexible disk cartridge, floppy disc, floppy, diskette

1F4BF  OPTICAL DISC

1F4C0  DVD
= digital video/versatile disc


1F4C1  FILE FOLDER

1F4C2  OPEN FILE FOLDER

1F4C3  PAGE WITH CURL


1F4C4  PAGE FACING UP

1F4C5  CALENDAR

1F4C6  TEAR-OFF CALENDAR

1F4C7  CARD INDEX


1F4C8  CHART WITH UPWARDS TREND


1F4C9  CHART WITH DOWNWARDS TREND

1F4CA  BAR CHART

1F4CB  CLIPBOARD

1F4CC  PUSHPIN

1F4CD  ROUND PUSHPIN


1F4CE  PAPERCLIP

1F4CF  STRAIGHT RULER


1F4D0  TRIANGULAR RULER

1F4D1  BOOKMARK TABS

1F4D2  LEDGER


1F4D3  NOTEBOOK

1F4D4  NOTEBOOK WITH DECORATIVE COVER

1F4D5  CLOSED BOOK

1F4D6  OPEN BOOK
= read operator's manual
• similar to ISO/IEC 7000-0790 "Read operator's manual"

1F4D7  GREEN BOOK

1F4D8  BLUE BOOK

1F4D9  ORANGE BOOK

1F4DA  BOOKS

1F4DB  NAME BADGE

1F4DC  SCROLL

Communication symbols

1F4DD  MEMO

1F4DE  TELEPHONE RECEIVER


1F4DF  PAGER

1F4E0  FAX MACHINE
→ 213B  facsimile sign



1F4E1  SATELLITE ANTENNA
= position indicator, news


1F4E2  PUBLIC ADDRESS LOUDSPEAKER


1F4E3  CHEERING MEGAPHONE


1F4E4  OUTBOX TRAY


1F4E5  INBOX TRAY

1F4E6  PACKAGE
→ 1F381  wrapped present

1F4E7  E-MAIL SYMBOL
• glyph may show an @-sign instead of an E

1F4E8  INCOMING ENVELOPE
→ 2709  envelope


1F4E9  ENVELOPE WITH DOWNWARDS ARROW ABOVE
• sending mail

1F4EA  CLOSED MAILBOX WITH LOWERED FLAG
= letter box, mail reception
= empty mailbox


1F4EB  CLOSED MAILBOX WITH RAISED FLAG
= mailbox containing mail

1F4EC  OPEN MAILBOX WITH RAISED FLAG


1F4ED  OPEN MAILBOX WITH LOWERED FLAG


1F4EE  POSTBOX
= mailbox for sending mail


1F4EF  POSTAL HORN


1F4F0  NEWSPAPER


1F4F1  MOBILE PHONE

1F4F2  MOBILE PHONE WITH RIGHTWARDS ARROW AT LEFT
• making a phone call

1F4F3  VIBRATION MODE


1F4F4  MOBILE PHONE OFF

1F4F5  NO MOBILE PHONES


1F4F6  ANTENNA WITH BARS
= cellular reception

Audio and video symbols

1F4F7  CAMERA

1F4F8  <reserved>


1F4F9  VIDEO CAMERA

1F4FA  TELEVISION


1F4FB  RADIO


1F4FC  VIDEOCASSETTE


User interface symbols

1F500  TWISTED RIGHTWARDS ARROWS
= shuffle

1F501  CLOCKWISE RIGHTWARDS AND LEFTWARDS OPEN CIRCLE ARROWS
= repeat
→ 267B  black universal recycling symbol

1F502  CLOCKWISE RIGHTWARDS AND LEFTWARDS OPEN CIRCLE ARROWS WITH CIRCLED ONE OVERLAY
= repeat one item over

1F503  CLOCKWISE DOWNWARDS AND UPWARDS
OPEN CIRCLE ARROWS
= reload

1F504  ANTICLOCKWISE DOWNWARDS AND
UPWARDS OPEN CIRCLE ARROWS
= reload

1F505  LOW BRIGHTNESS SYMBOL

1F506  HIGH BRIGHTNESS SYMBOL
→ 2600  black sun with rays
→ 263C  white sun with rays
→ 26ED  gear without hub


1F507  SPEAKER WITH CANCELLATION STROKE


1F508  SPEAKER

1F509  SPEAKER WITH ONE SOUND WAVE

1F50A  SPEAKER WITH THREE SOUND WAVES
= sound


1F50B  BATTERY

1F50C  ELECTRIC PLUG

1F50D  LEFT-POINTING MAGNIFYING GLASS
= search


1F50E  RIGHT-POINTING MAGNIFYING GLASS
= get more details




1F50F  LOCK WITH INK PEN
= privacy


1F510  CLOSED LOCK WITH KEY
= secure


1F511  KEY
→ 26BF  squared key

1F512  LOCK
= padlock in locked position




1F513  OPEN LOCK

1F514  BELL
→ 0FC4  tibetan symbol dril bu
→ 2407  symbol for bell

1F515  BELL WITH CANCELLATION STROKE

1F516  BOOKMARK

1F517  LINK SYMBOL

1F518  RADIO BUTTON
→ 2299  circled dot operator
→ 25C9  fisheye
→ 25CE  bullseye

Words with arrows

1F519  BACK WITH LEFTWARDS ARROW ABOVE
→ 2397  previous page

1F51A  END WITH LEFTWARDS ARROW ABOVE



1F51B  ON WITH EXCLAMATION MARK WITH LEFT
RIGHT ARROW ABOVE

1F51C  SOON WITH RIGHTWARDS ARROW ABOVE


1F51D  TOP WITH UPWARDS ARROW ABOVE
= top of page

Enclosed alphanumeric symbols

1F51E  NO ONE UNDER EIGHTEEN SYMBOL

1F51F  KEYCAP TEN
→ 20E3  combining enclosing keycap

User interface input status symbols

1F520  INPUT SYMBOL FOR LATIN CAPITAL LETTERS

1F521  INPUT SYMBOL FOR LATIN SMALL LETTERS


1F522  INPUT SYMBOL FOR NUMBERS

1F523  INPUT SYMBOL FOR SYMBOLS


1F524  INPUT SYMBOL FOR LATIN LETTERS
= English input (ABC)


Tool symbols

1F525  FIRE

1F526  ELECTRIC TORCH
= flashlight

1F527  WRENCH

1F528  HAMMER

1F529  NUT AND BOLT

1F52A  HOCHO
= Japanese kitchen knife


1F52B  PISTOL

1F52C  MICROSCOPE

1F52D  TELESCOPE


1F52E  CRYSTAL BALL

1F52F  SIX POINTED STAR WITH MIDDLE DOT
→ 2721  star of david



1F530  JAPANESE SYMBOL FOR BEGINNER

1F531  TRIDENT EMBLEM

Geometric shapes

1F532  BLACK SQUARE BUTTON


1F533  WHITE SQUARE BUTTON


1F534  LARGE RED CIRCLE
→ 25CF  black circle
→ 25EF  large circle
→ 2B24  black large circle
→ 2B55  heavy large circle

1F535  LARGE BLUE CIRCLE

1F536  LARGE ORANGE DIAMOND
→ 25C6  black diamond



1F537  LARGE BLUE DIAMOND

1F538  SMALL ORANGE DIAMOND
→ 2B29  black small diamond


1F539  SMALL BLUE DIAMOND

User interface symbols



1F53A  UP-POINTING RED TRIANGLE
→ 25B2  black up-pointing triangle



1F53B  DOWN-POINTING RED TRIANGLE
→ 25BC  black down-pointing triangle

1F53C  UP-POINTING SMALL RED TRIANGLE
= play arrow up
→ 25B4  black up-pointing small triangle

1F53D  DOWN-POINTING SMALL RED TRIANGLE
= play arrow down
→ 25BE  black down-pointing small triangle

Shadowed geometric shapes


1F53E  LOWER RIGHT SHADOWED WHITE CIRCLE
= circle shadow down
→ 274D  shadowed white circle


1F53F  UPPER RIGHT SHADOWED WHITE CIRCLE
→ 274D  shadowed white circle

Religious symbols

1F540  CIRCLED CROSS POMMEE
• Orthodox typikon symbol for great feast service

1F541  CROSS POMMEE WITH HALF-CIRCLE BELOW
• Orthodox typikon symbol for vigil service

1F542  CROSS POMMEE

• Orthodox typikon symbol for Polyeleos
→ 2722  four teardrop-spoked asterisk

1F543  NOTCHED LEFT SEMICIRCLE WITH THREE DOTS
• Orthodox typikon symbol for lower rank feast

| | | |
|-------|--|---|
| 1F544 | | NOTCHED RIGHT SEMICIRCLE WITH THREE DOTS • Orthodox typikon for lower rank feast |
| 1F545 | | SYMBOL FOR MARKS CHAPTER • Orthodox typikon for difficult sections |
| 1F546 | | WHITE LATIN CROSS = cross outline → 271E shadowed white latin cross |
| 1F547 | | HEAVY LATIN CROSS |
| 1F548 | | CELTIC CROSS |
| 1F549 | | OM SYMBOL • devanagari font type independent → 0950 devanagari om |
| 1F54A | | DOVE OF PEACE = peace |

Clock face symbols

| | | |
|-------|--|---|
| 1F550 | | CLOCK FACE ONE OCLOCK → 231A watch → 23F0 alarm clock |
| 1F551 | | CLOCK FACE TWO OCLOCK |
| 1F552 | | CLOCK FACE THREE OCLOCK |
| 1F553 | | CLOCK FACE FOUR OCLOCK |
| 1F554 | | CLOCK FACE FIVE OCLOCK |
| 1F555 | | CLOCK FACE SIX OCLOCK |
| 1F556 | | CLOCK FACE SEVEN OCLOCK |
| 1F557 | | CLOCK FACE EIGHT OCLOCK |
| 1F558 | | CLOCK FACE NINE OCLOCK |
| 1F559 | | CLOCK FACE TEN OCLOCK |
| 1F55A | | CLOCK FACE ELEVEN OCLOCK |
| 1F55B | | CLOCK FACE TWELVE OCLOCK |
| 1F55C | | CLOCK FACE ONE-THIRTY |
| 1F55D | | CLOCK FACE TWO-THIRTY |
| 1F55E | | CLOCK FACE THREE-THIRTY |
| 1F55F | | CLOCK FACE FOUR-THIRTY |
| 1F560 | | CLOCK FACE FIVE-THIRTY |
| 1F561 | | CLOCK FACE SIX-THIRTY |
| 1F562 | | CLOCK FACE SEVEN-THIRTY |
| 1F563 | | CLOCK FACE EIGHT-THIRTY |
| 1F564 | | CLOCK FACE NINE-THIRTY |
| 1F565 | | CLOCK FACE TEN-THIRTY |
| 1F566 | | CLOCK FACE ELEVEN-THIRTY |
| 1F567 | | CLOCK FACE TWELVE-THIRTY |

Communication symbols

| | | |
|-------|--|--------------------------------------|
| 1F568 | | RIGHT SPEAKER = sound left |
| 1F569 | | RIGHT SPEAKER WITH ONE SOUND WAVE |
| 1F56A | | RIGHT SPEAKER WITH THREE SOUND WAVES |

Miscellaneous symbols

| | | |
|-------|--|--|
| 1F56D | | RINGING BELL → 1F514 bell |
| 1F56E | | BOOK → 1F4D6 open book |
| 1F56F | | CANDLE |
| 1F570 | | <reserved> |
| 1F571 | | BLACK SKULL AND CROSSBONES = skull and crossbones → 2620 skull and crossbones |
| 1F572 | | <reserved> |
| 1F573 | | HOLE = portable hole = w-0212 |

| | | |
|-------|--|------------|
| 1F574 | | <reserved> |
| 1F575 | | <reserved> |
| 1F576 | | <reserved> |
| 1F577 | | SPIDER |
| 1F578 | | SPIDER WEB |

Communication symbols

| | | |
|---------------------|--|---|
| 1F57B | | LEFT HAND TELEPHONE RECEIVER = phone → 1F4DE telephone receiver |
| 1F57C | | <reserved> |
| 1F57D | | RIGHT HAND TELEPHONE RECEIVER = telephone handset |
| 1F57E | | WHITE TOUCHTONE TELEPHONE = telephone → 260F white telephone |
| 1F57F | | BLACK TOUCHTONE TELEPHONE = telephone solid → 260E black telephone |
| 1F580 | | <reserved> |
| 1F581 | | <reserved> |
| 1F582 | | BACK OF ENVELOPE → 2709 envelope • 2709 shows a seal |
| 1F583 | | STAMPED ENVELOPE = mail |
| 1F584 | | ENVELOPE WITH LIGHTNING = e-mail → 1F4E7 e-mail symbol |
| 1F585 | | FLYING ENVELOPE = send message → 1F4E9 envelope with downwards arrow above |
| 1F586 | | PEN OVER STAMPED ENVELOPE |
| 1F587 | | LINKED PAPERCLIPS = links → 1F4CE paperclip |
| 1F588 | | <reserved> |
| 1F589 | | LOWER LEFT PENCIL = pencil → 270E lower right pencil |
| 1F58A | | LOWER LEFT BALLPOINT PEN = ballpoint pen → 270E lower right pencil |
| 1F58B | | LOWER LEFT FOUNTAIN PEN = fountain pen → 2711 white nib |
| 1F58C | | LOWER LEFT PAINTBRUSH = brush |
| 1F58D | | LOWER LEFT CRAYON = crayon |
| Hand symbols | | |
| 1F58E | | LEFT WRITING HAND → 270D writing hand |
| 1F58F | | TURNED OK HAND SIGN → 1F44C ok hand sign |
| 1F590 | | RAISED HAND WITH FINGERS SPLOYED = halt → 270B raised hand |
| 1F591 | | REVERSED RAISED HAND WITH FINGERS SPLOYED |
| 1F592 | | REVERSED THUMBS UP SIGN → 1F44D thumbs up sign |

| | | |
|-------|--|---|
| 1F593 | | REVERSED THUMBS DOWN SIGN → 1F44E thumbs down sign |
| 1F594 | | <reserved> |
| 1F595 | | <reserved> |
| 1F596 | | <reserved> |
| 1F597 | | WHITE DOWN POINTING LEFT HAND INDEX → 261F white down pointing index → 1F447 white down pointing backhand index |
| 1F598 | | SIDEWAYS WHITE LEFT POINTING INDEX → 261C white left pointing index |
| 1F599 | | SIDEWAYS WHITE RIGHT POINTING INDEX → 261E white right pointing index |
| 1F59A | | SIDEWAYS BLACK LEFT POINTING INDEX |
| 1F59B | | SIDEWAYS BLACK RIGHT POINTING INDEX |
| 1F59C | | BLACK LEFT POINTING BACKHAND INDEX → 1F448 white left pointing backhand index |
| 1F59D | | BLACK RIGHT POINTING BACKHAND INDEX → 1F449 white right pointing backhand index |
| 1F59E | | SIDEWAYS WHITE UP POINTING INDEX → 261D white up pointing index |
| 1F59F | | SIDEWAYS WHITE DOWN POINTING INDEX → 261F white down pointing index |
| 1F5A0 | | SIDEWAYS BLACK UP POINTING INDEX |
| 1F5A1 | | SIDEWAYS BLACK DOWN POINTING INDEX |
| 1F5A2 | | BLACK UP POINTING BACKHAND INDEX → 1F446 white up pointing backhand index |
| 1F5A3 | | BLACK DOWN POINTING BACKHAND INDEX → 1F447 white down pointing backhand index |

Computer symbols

| | | |
|-------|--|--|
| 1F5A5 | | DESKTOP COMPUTER = tower computer |
| 1F5A6 | | KEYBOARD AND MOUSE → 2328 keyboard |
| 1F5A7 | | THREE NETWORKED COMPUTERS = computer network |
| 1F5A8 | | PRINTER → 1F4E0 fax machine |
| 1F5A9 | | POCKET CALCULATOR = calculator |
| 1F5AA | | BLACK HARD SHELL FLOPPY DISK = disk → 1F4BE floppy disk |
| 1F5AB | | WHITE HARD SHELL FLOPPY DISK → 1F4BE floppy disk |
| 1F5AC | | SOFT SHELL FLOPPY DISK → 1F4BE floppy disk |
| 1F5AD | | TAPE CARTRIDGE |
| 1F5AE | | WIRED KEYBOARD = keyboard → 2328 keyboard |
| 1F5AF | | ONE BUTTON MOUSE |
| 1F5B0 | | TWO BUTTON MOUSE |
| 1F5B1 | | THREE BUTTON MOUSE |
| 1F5B2 | | TRACKBALL = ballpoint |
| 1F5B3 | | OLD PERSONAL COMPUTER = personal computer → 1F4BB personal computer |
| 1F5B4 | | HARD DISK |



| | | |
|-------|--|--|
| 1F5B5 | | SCREEN = monitor → 20E2 combining enclosing screen |
| 1F5B6 | | PRINTER ICON → 1F5A8 printer |
| 1F5B7 | | FAX ICON → 1F4E0 fax machine |
| 1F5B8 | | OPTICAL DISC ICON = compact disc → 1F4BF optical disc |



Office symbols


| | | |
|-------|--|---|
| 1F5B9 | | DOCUMENT WITH TEXT |
| 1F5BA | | DOCUMENT WITH TEXT AND PICTURE |
| 1F5BB | | DOCUMENT WITH PICTURE = graphic document |


User interface symbols

| | | |
|-------|--|--|
| 1F5BF | | BLACK FOLDER = folder |
| 1F5C0 | | FOLDER = directory → 1F4C1 file folder |
| 1F5C1 | | OPEN FOLDER → 1F4C2 open file folder |
| 1F5C2 | | <reserved> |
| 1F5C3 | | <reserved> |
| 1F5C4 | | FILE CABINET |
| 1F5C5 | | EMPTY NOTE = file1 |
| 1F5C6 | | EMPTY NOTE PAGE = file |
| 1F5C7 | | EMPTY NOTE PAD = file3 |
| 1F5C8 | | NOTE = file text1 |
| 1F5C9 | | NOTE PAGE = file text |
| 1F5CA | | NOTE PAD = file text3 |
| 1F5CB | | EMPTY DOCUMENT = tall file1 |
| 1F5CC | | EMPTY PAGE = tall file |
| 1F5CD | | EMPTY PAGES = tall file3 |
| 1F5CE | | DOCUMENT = tall file with text 1 → 1F4C4 page facing up |
| 1F5CF | | PAGE = tall file with text → 1F4C3 page with curl |
| 1F5D0 | | PAGES = tall file with text 3 |
| 1F5D1 | | WASTEBASKET = trashcan |
| 1F5D2 | | <reserved> |
| 1F5D3 | | <reserved> |
| 1F5D4 | | DESKTOP WINDOW |
| 1F5D5 | | MINIMIZE |
| 1F5D6 | | MAXIMIZE |
| 1F5D7 | | OVERLAP = tile windows |


1F5D8  CLOCKWISE RIGHT AND LEFT SEMICIRCLE ARROWS
 = refresh
 → 1F503  clockwise downwards and upwards
 open circle arrows


1F5D9  CANCELLATION X
 = close
 → 274C  cross mark



1F5DA  INCREASE FONT SIZE SYMBOL


1F5DB  DECREASE FONT SIZE SYMBOL


Ballot symbols


1F5F4  BALLOT SCRIPT X
 = x mark

1F5F5  BALLOT BOX WITH SCRIPT X
 = box x mark

1F5F6  BALLOT BOLD SCRIPT X
 = x mark bold
 → 2717  ballot x

1F5F7  BALLOT BOX WITH BOLD SCRIPT X
 = box x mark bold






1F5F8  LIGHT CHECK MARK
 = check

















































































1F5F9  BALLOT BOX WITH BOLD CHECK
 = box mark bold

Map symbol

1F5FA  WORLD MAP

Cultural symbols

1F5FB  MOUNT FUJI
 1F5FC  TOKYO TOWER
 1F5FD  STATUE OF LIBERTY
 1F5FE  SILHOUETTE OF JAPAN
 1F5FF  MOYAI
 • Japanese stone statue like Moai on Easter Island

| | 1F600 | 1F610 | 1F620 | 1F630 | 1F640 |
|---|---|---|---|---|--|
| 0 |  |  |  |  |  |
| | 1F600 | 1F610 | 1F620 | 1F630 | 1F640 |
| 1 |  |  |  |  |  |
| | 1F601 | 1F611 | 1F621 | 1F631 | 1F641 |
| 2 |  |  |  |  |  |
| | 1F602 | 1F612 | 1F622 | 1F632 | 1F642 |
| 3 |  |  |  |  |  |
| | 1F603 | 1F613 | 1F623 | 1F633 | |
| 4 |  |  |  |  |  |
| | 1F604 | 1F614 | 1F624 | 1F634 | |
| 5 |  |  |  |  |  |
| | 1F605 | 1F615 | 1F625 | 1F635 | 1F645 |
| 6 |  |  |  |  |  |
| | 1F606 | 1F616 | 1F626 | 1F636 | 1F646 |
| 7 |  |  |  |  |  |
| | 1F607 | 1F617 | 1F627 | 1F637 | 1F647 |
| 8 |  |  |  |  |  |
| | 1F608 | 1F618 | 1F628 | 1F638 | 1F648 |
| 9 |  |  |  |  |  |
| | 1F609 | 1F619 | 1F629 | 1F639 | 1F649 |
| A |  |  |  |  |  |
| | 1F60A | 1F61A | 1F62A | 1F63A | 1F64A |
| B |  |  |  |  |  |
| | 1F60B | 1F61B | 1F62B | 1F63B | 1F64B |
| C |  |  |  |  |  |
| | 1F60C | 1F61C | 1F62C | 1F63C | 1F64C |
| D |  |  |  |  |  |
| | 1F60D | 1F61D | 1F62D | 1F63D | 1F64D |
| E |  |  |  |  |  |
| | 1F60E | 1F61E | 1F62E | 1F63E | 1F64E |
| F |  |  |  |  |  |
| | 1F60F | 1F61F | 1F62F | 1F63F | 1F64F |

The emoticons have been organized by mouth shape to make it easier to locate the different characters in the code chart.

Faces

| | | |
|-------|---|--|
| 1F600 | 😊 | GRINNING FACE |
| 1F601 | 😄 | GRINNING FACE WITH SMILING EYES |
| 1F602 | 😂 | FACE WITH TEARS OF JOY |
| 1F603 | 😁 | SMILING FACE WITH OPEN MOUTH → 263A 😊 white smiling face |
| 1F604 | 😆 | SMILING FACE WITH OPEN MOUTH AND SMILING EYES |
| 1F605 | 😓 | SMILING FACE WITH OPEN MOUTH AND COLD SWEAT |
| 1F606 | 😏 | SMILING FACE WITH OPEN MOUTH AND TIGHTLY-CLOSED EYES |
| 1F607 | 😇 | SMILING FACE WITH HALO |
| 1F608 | 😠 | SMILING FACE WITH HORNS |
| 1F609 | 😉 | WINKING FACE |
| 1F60A | 😌 | SMILING FACE WITH SMILING EYES |
| 1F60B | 😋 | FACE SAVOURING DELICIOUS FOOD |
| 1F60C | 😌 | RELIEVED FACE |
| 1F60D | 😍 | SMILING FACE WITH HEART-SHAPED EYES |
| 1F60E | 😎 | SMILING FACE WITH SUNGLASSES |
| 1F60F | 😏 | SMIRKING FACE |
| 1F610 | 😐 | NEUTRAL FACE • used for the West Wind in some Mahjong annotation |
| 1F611 | 😐 | EXPRESSIONLESS FACE |
| 1F612 | 😐 | UNAMUSED FACE |
| 1F613 | 😓 | FACE WITH COLD SWEAT |
| 1F614 | 😐 | PENSIVE FACE |
| 1F615 | 😕 | CONFUSED FACE |
| 1F616 | 😖 | CONFOUNDED FACE |
| 1F617 | 😘 | KISSING FACE |
| 1F618 | 😗 | FACE THROWING A KISS |
| 1F619 | 😙 | KISSING FACE WITH SMILING EYES |
| 1F61A | 😚 | KISSING FACE WITH CLOSED EYES |
| 1F61B | 😛 | FACE WITH STUCK-OUT TONGUE |
| 1F61C | 😜 | FACE WITH STUCK-OUT TONGUE AND WINKING EYE • kidding, not serious |
| 1F61D | 😝 | FACE WITH STUCK-OUT TONGUE AND TIGHTLY-CLOSED EYES • kidding, not serious |
| 1F61E | 😞 | DISAPPOINTED FACE → 2639 😞 white frowning face |
| 1F61F | 😟 | WORRIED FACE |
| 1F620 | 😡 | ANGRY FACE |
| 1F621 | 😇 | POUTING FACE |
| 1F622 | 😭 | CRYING FACE |
| 1F623 | 😏 | PERSEVERING FACE |
| 1F624 | 😏 | FACE WITH LOOK OF TRIUMPH |
| 1F625 | 😏 | DISAPPOINTED BUT RELIEVED FACE |
| 1F626 | 😏 | FROWNING FACE WITH OPEN MOUTH |
| 1F627 | 😏 | ANGUISHED FACE |
| 1F628 | 😏 | FEARFUL FACE |
| 1F629 | 😏 | WEARY FACE |
| 1F62A | 😏 | SLEEPY FACE |
| 1F62B | 😏 | TIRED FACE |
| 1F62C | 😏 | GRIMACING FACE |
| 1F62D | 😏 | LOUDLY CRYING FACE |
| 1F62E | 😏 | FACE WITH OPEN MOUTH |
| 1F62F | 😏 | HUSHED FACE |

| | | |
|-------|---|---|
| 1F630 | 😓 | FACE WITH OPEN MOUTH AND COLD SWEAT |
| 1F631 | 😱 | FACE SCREAMING IN FEAR |
| 1F632 | 😲 | ASTONISHED FACE |
| 1F633 | 😬 | FLUSHED FACE |
| 1F634 | 😴 | SLEEPING FACE |
| 1F635 | 😵 | DIZZY FACE |
| 1F636 | 😶 | FACE WITHOUT MOUTH • used for the South Wind in some Mahjong annotation → 2687 ⦿ white circle with two dots |
| 1F637 | 😷 | FACE WITH MEDICAL MASK |

Cat faces

| | | |
|-------|---|---|
| 1F638 | 😺 | GRINNING CAT FACE WITH SMILING EYES |
| 1F639 | 😸 | CAT FACE WITH TEARS OF JOY |
| 1F63A | 😺 | SMILING CAT FACE WITH OPEN MOUTH |
| 1F63B | 😺 | SMILING CAT FACE WITH HEART-SHAPED EYES |
| 1F63C | 😺 | CAT FACE WITH WRY SMILE |
| 1F63D | 😺 | KISSING CAT FACE WITH CLOSED EYES |
| 1F63E | 😺 | POUTING CAT FACE |
| 1F63F | 😺 | CRYING CAT FACE |
| 1F640 | 😺 | WEARY CAT FACE |

Faces









| | | |
|-------|---|--|
| 1F641 | 😏 | SLIGHTLY FROWNING FACE → 2639 😞 white frowning face |
| 1F642 | 😏 | SLIGHTLY SMILING FACE → 263A 😊 white smiling face |

Gesture symbols









| | | |
|-------|---|--|
| 1F645 | 🙄 | FACE WITH NO GOOD GESTURE |
| 1F646 | 🙏 | FACE WITH OK GESTURE |
| 1F647 | 🙇 | PERSON BOWING DEEPLY |
| 1F648 | 🙈 | SEE-NO-EVIL MONKEY |
| 1F649 | 🙉 | HEAR-NO-EVIL MONKEY |
| 1F64A | 🙊 | SPEAK-NO-EVIL MONKEY |
| 1F64B | 🙋 | HAPPY PERSON RAISING ONE HAND |
| 1F64C | 🙌 | PERSON RAISING BOTH HANDS IN CELEBRATION = banzai! |
| 1F64D | 🙍 | PERSON FROWNING |
| 1F64E | 🙎 | PERSON WITH POUTING FACE |
| 1F64F | 🙏 | PERSON WITH FOLDED HANDS • can indicate sorrow or regret • can indicate pleading |

| | 1F65 | 1F66 | 1F67 |
|---|--|--|--|
| 0 |  1F650 |  1F660 |  1F670 |
| 1 |  1F651 |  1F661 |  1F671 |
| 2 |  1F652 |  1F662 |  1F672 |
| 3 |  1F653 |  1F663 |  1F673 |
| 4 |  1F654 |  1F664 |  1F674 |
| 5 |  1F655 |  1F665 |  1F675 |
| 6 |  1F656 |  1F666 |  1F676 |
| 7 |  1F657 |  1F667 |  1F677 |
| 8 |  1F658 |  1F668 |  1F678 |
| 9 |  1F659 |  1F669 |  1F679 |
| A |  1F65A |  1F66A |  1F67A |
| B |  1F65B |  1F66B |  1F67B |
| C |  1F65C |  1F66C |  1F67C |
| D |  1F65D |  1F66D |  1F67D |
| E |  1F65E |  1F66E |  1F67E |
| F |  1F65F |  1F66F |  1F67F |









Leaf ornaments

| | | |
|-------|---|---------------------------------|
| 1F650 |  | NORTH WEST POINTING LEAF |
| 1F651 |  | SOUTH WEST POINTING LEAF |
| 1F652 |  | NORTH EAST POINTING LEAF |
| 1F653 |  | SOUTH EAST POINTING LEAF |
| 1F654 |  | TURNED NORTH WEST POINTING LEAF |
| 1F655 |  | TURNED SOUTH WEST POINTING LEAF |
| 1F656 |  | TURNED NORTH EAST POINTING LEAF |
| 1F657 |  | TURNED SOUTH EAST POINTING LEAF |





Vine leaf ornaments

| | | |
|-------|---|-------------------------------------|
| 1F658 |  | NORTH WEST POINTING VINE LEAF |
| 1F659 |  | SOUTH WEST POINTING VINE LEAF |
| 1F65A |  | NORTH EAST POINTING VINE LEAF |
| 1F65B |  | SOUTH EAST POINTING VINE LEAF |
| 1F65C |  | HEAVY NORTH WEST POINTING VINE LEAF |
| 1F65D |  | HEAVY SOUTH WEST POINTING VINE LEAF |
| 1F65E |  | HEAVY NORTH EAST POINTING VINE LEAF |
| 1F65F |  | HEAVY SOUTH EAST POINTING VINE LEAF |






Pointing bud ornaments

| | | |
|-------|--|-------------------------------|
| 1F660 |  | NORTH WEST POINTING BUD |
| 1F661 |  | SOUTH WEST POINTING BUD |
| 1F662 |  | NORTH EAST POINTING BUD |
| 1F663 |  | SOUTH EAST POINTING BUD |
| 1F664 |  | HEAVY NORTH WEST POINTING BUD |
| 1F665 |  | HEAVY SOUTH WEST POINTING BUD |
| 1F666 |  | HEAVY NORTH EAST POINTING BUD |
| 1F667 |  | HEAVY SOUTH EAST POINTING BUD |







Quilt square ornaments

| | | |
|-------|---|---|
| 1F668 |  | HOLLOW QUILT SQUARE ORNAMENT |
| 1F669 |  | HOLLOW QUILT SQUARE ORNAMENT IN BLACK SQUARE |
| 1F66A |  | SOLID QUILT SQUARE ORNAMENT = fourfold knot ornament |
| 1F66B |  | SOLID QUILT SQUARE ORNAMENT IN BLACK SQUARE = inverse fourfold knot ornament |





Rocket ornaments


| | | |
|-------|---|--|
| 1F66C |  | LEFTWARDS ROCKET → 1F680  rocket |
| 1F66D |  | UPWARDS ROCKET |
| 1F66E |  | RIGHTWARDS ROCKET |
| 1F66F |  | DOWNWARDS ROCKET |

ET ligature and ampersand ornaments




| | | |
|-------|---|--|
| 1F670 |  | SCRIPT LIGATURE ET ORNAMENT = italic ampersand lower case |
| 1F671 |  | HEAVY SCRIPT LIGATURE ET ORNAMENT |
| 1F672 |  | LIGATURE OPEN ET ORNAMENT |
| 1F673 |  | HEAVY LIGATURE OPEN ET ORNAMENT |
| 1F674 |  | HEAVY AMPERSAND ORNAMENT |
| 1F675 |  | SWASH AMPERSAND ORNAMENT = italic ampersand |

Quotation mark ornaments



| | | |
|-------|---|--|
| 1F676 |  | SANS-SERIF HEAVY DOUBLE TURNED COMMA QUOTATION MARK ORNAMENT → 275D  heavy double turned comma quotation mark ornament |
| 1F677 |  | SANS-SERIF HEAVY DOUBLE COMMA QUOTATION MARK ORNAMENT → 275E  heavy double comma quotation mark ornament |

| | | |
|-------|---|---|
| 1F678 |  | SANS-SERIF HEAVY LOW DOUBLE COMMA QUOTATION MARK ORNAMENT |
|-------|---|---|




Interrobang ornaments













































































| | | |
|-------|---|---------------------------------------|
| 1F679 |  | HEAVY INTERROBANG ORNAMENT |
| 1F67A |  | SANS-SERIF INTERROBANG ORNAMENT |
| 1F67B |  | HEAVY SANS-SERIF INTERROBANG ORNAMENT |

Heavy solidus ornaments

| | | |
|-------|---|----------------------------|
| 1F67C |  | VERY HEAVY SOLIDUS |
| 1F67D |  | VERY HEAVY REVERSE SOLIDUS |

Miscellaneous symbols

| | | |
|-------|---|---|
| 1F67E |  | CHECKER BOARD → 259E  quadrant upper right and lower left |
| 1F67F |  | REVERSE CHECKER BOARD |

| | 1F68 | 1F69 | 1F6A | 1F6B | 1F6C | 1F6D | 1F6E | 1F6F |
|---|--|--|--|--|--|------|--|------|
| 0 |  1F680 |  1F690 |  1F6A0 |  1F6B0 |  1F6C0 | |  1F6E0 | |
| 1 |  1F681 |  1F691 |  1F6A1 |  1F6B1 |  1F6C1 | | | |
| 2 |  1F682 |  1F692 |  1F6A2 |  1F6B2 |  1F6C2 | | | |
| 3 |  1F683 |  1F693 |  1F6A3 |  1F6B3 |  1F6C3 | | | |
| 4 |  1F684 |  1F694 |  1F6A4 |  1F6B4 |  1F6C4 | | | |
| 5 |  1F685 |  1F695 |  1F6A5 |  1F6B5 |  1F6C5 | | | |
| 6 |  1F686 |  1F696 |  1F6A6 |  1F6B6 |  1F6C6 | | | |
| 7 |  1F687 |  1F697 |  1F6A7 |  1F6B7 |  1F6C7 | | | |
| 8 |  1F688 |  1F698 |  1F6A8 |  1F6B8 |  1F6C8 | | | |
| 9 |  1F689 |  1F699 |  1F6A9 |  1F6B9 |  1F6C9 | | | |
| A |  1F68A |  1F69A |  1F6AA |  1F6BA |  1F6CA | | | |
| B |  1F68B |  1F69B |  1F6AB |  1F6BB | | | | |
| C |  1F68C |  1F69C |  1F6AC |  1F6BC | | | | |
| D |  1F68D |  1F69D |  1F6AD |  1F6BD | | | | |
| E |  1F68E |  1F69E |  1F6AE |  1F6BE | | | | |
| F |  1F68F |  1F69F |  1F6AF |  1F6BF | | | | |

Vehicles

| | | |
|-------|--|---------------------------------------|
| 1F680 | | ROCKET |
| 1F681 | | HELICOPTER → 2708 airplane |
| 1F682 | | STEAM LOCOMOTIVE |
| 1F683 | | RAILWAY CAR |
| 1F684 | | HIGH-SPEED TRAIN |
| 1F685 | | HIGH-SPEED TRAIN WITH BULLET NOSE |
| 1F686 | | TRAIN = intercity train |
| 1F687 | | METRO = subway, underground train |
| 1F688 | | LIGHT RAIL |
| 1F689 | | STATION = train, subway station |
| 1F68A | | TRAM |
| 1F68B | | TRAM CAR |
| 1F68C | | BUS |
| 1F68D | | ONCOMING BUS |
| 1F68E | | TROLLEYBUS |
| 1F68F | | BUS STOP |
| 1F690 | | MINIBUS |
| 1F691 | | AMBULANCE |
| 1F692 | | FIRE ENGINE |
| 1F693 | | POLICE CAR |
| 1F694 | | ONCOMING POLICE CAR |
| 1F695 | | TAXI |
| 1F696 | | ONCOMING TAXI |
| 1F697 | | AUTOMOBILE |
| 1F698 | | ONCOMING AUTOMOBILE |
| 1F699 | | RECREATIONAL VEHICLE |
| 1F69A | | DELIVERY TRUCK → 26DF black truck |
| 1F69B | | ARTICULATED LORRY |
| 1F69C | | TRACTOR |
| 1F69D | | MONORAIL |
| 1F69E | | MOUNTAIN RAILWAY |
| 1F69F | | SUSPENSION RAILWAY |
| 1F6A0 | | MOUNTAIN CABLEWAY |
| 1F6A1 | | AERIAL TRAMWAY |
| 1F6A2 | | SHIP → 26F4 ferry |
| 1F6A3 | | ROWBOAT → 26F5 sailboat |
| 1F6A4 | | SPEEDBOAT |

Traffic signs

| | | |
|-------|--|--|
| 1F6A5 | | HORIZONTAL TRAFFIC LIGHT |
| 1F6A6 | | VERTICAL TRAFFIC LIGHT |
| 1F6A7 | | CONSTRUCTION SIGN → 26CF pick |
| 1F6A8 | | POLICE CARS REVOLVING LIGHT = rotating beacon |

Signage and other symbols

| | | |
|-------|--|---|
| 1F6A9 | | TRIANGULAR FLAG ON POST = location information → 26F3 flag in hole |
| 1F6AA | | DOOR |
| 1F6AB | | NO ENTRY SIGN → 20E0 combining enclosing circle backslash → 26D4 no entry |
| 1F6AC | | SMOKING SYMBOL |


















































































| | | |
|-------|--|--|
| 1F6AD | | NO SMOKING SYMBOL |
| 1F6AE | | PUT LITTER IN ITS PLACE SYMBOL |
| 1F6AF | | DO NOT LITTER SYMBOL |
| 1F6B0 | | POTABLE WATER SYMBOL |
| 1F6B1 | | NON-POTABLE WATER SYMBOL |
| 1F6B2 | | BICYCLE |
| 1F6B3 | | NO BICYCLES |
| 1F6B4 | | BICYCLIST |
| 1F6B5 | | MOUNTAIN BICYCLIST |
| 1F6B6 | | PEDESTRIAN = walking |
| 1F6B7 | | NO PEDESTRIANS |
| 1F6B8 | | CHILDREN CROSSING |
| 1F6B9 | | MENS SYMBOL = man symbol = men's restroom |
| 1F6BA | | WOMENS SYMBOL = woman symbol = women's restroom |
| 1F6BB | | RESTROOM = man and woman symbol with divider = unisex restroom → 1F46B man and woman holding hands |
| 1F6BC | | BABY SYMBOL = baby on board, baby changing station |
| 1F6BD | | TOILET |
| 1F6BE | | WATER CLOSET |
| 1F6BF | | SHOWER |
| 1F6C0 | | BATH |
| 1F6C1 | | BATHTUB |
| 1F6C2 | | PASSPORT CONTROL |
| 1F6C3 | | CUSTOMS |
| 1F6C4 | | BAGGAGE CLAIM |
| 1F6C5 | | LEFT LUGGAGE |
| 1F6C6 | | TRIANGLE WITH ROUNDED CORNERS = caution → 25B3 white up-pointing triangle |
| 1F6C7 | | PROHIBITED SIGN → 20E0 combining enclosing circle backslash → 1F6AB no entry sign |
| 1F6C8 | | CIRCLED INFORMATION SOURCE = information |

Signages and other symbols

| | | |
|-------|--|------------------------|
| 1F6C9 | | BOYS SYMBOL = boy |
| 1F6CA | | GIRLS SYMBOL = girl |

Miscellaneous symbols

| | | |
|-------|--|--|
| 1F6E0 | | HAMMER AND WRENCH = tools, repair facility → 2692 hammer and pick |
|-------|--|--|

| | 1F78 | 1F79 | 1F7A | 1F7B | 1F7C | 1F7D | 1F7E | 1F7F |
|---|--|--|--|--|--|--|------|------|
| 0 |  1F780 |  1F790 |  1F7A0 |  1F7B0 |  1F7C0 |  1F7D0 | | |
| 1 |  1F781 |  1F791 |  1F7A1 |  1F7B1 |  1F7C1 |  1F7D1 | | |
| 2 |  1F782 |  1F792 |  1F7A2 |  1F7B2 |  1F7C2 |  1F7D2 | | |
| 3 |  1F783 |  1F793 |  1F7A3 |  1F7B3 |  1F7C3 |  1F7D3 | | |
| 4 |  1F784 |  1F794 |  1F7A4 |  1F7B4 |  1F7C4 |  1F7D4 | | |
| 5 |  1F785 |  1F795 |  1F7A5 |  1F7B5 |  1F7C5 | | | |
| 6 |  1F786 |  1F796 |  1F7A6 |  1F7B6 |  1F7C6 | | | |
| 7 |  1F787 |  1F797 |  1F7A7 |  1F7B7 |  1F7C7 | | | |
| 8 |  1F788 |  1F798 |  1F7A8 |  1F7B8 |  1F7C8 | | | |
| 9 |  1F789 |  1F799 |  1F7A9 |  1F7B9 |  1F7C9 | | | |
| A |  1F78A |  1F79A |  1F7AA |  1F7BA |  1F7CA | | | |
| B |  1F78B |  1F79B |  1F7AB |  1F7BB |  1F7CB | | | |
| C |  1F78C |  1F79C |  1F7AC |  1F7BC |  1F7CC | | | |
| D |  1F78D |  1F79D |  1F7AD |  1F7BD |  1F7CD | | | |
| E |  1F78E |  1F79E |  1F7AE |  1F7BE |  1F7CE | | | |
| F |  1F78F |  1F79F |  1F7AF |  1F7BF |  1F7CF | | | |

These geometric shapes originate from the *Webdings/Wingdings* collections.

Isosceles right triangles

| | | |
|-------|---|---|
| 1F780 | ◀ | BLACK LEFT-POINTING ISOSCELES RIGHT TRIANGLE |
| 1F781 | ▲ | BLACK UP-POINTING ISOSCELES RIGHT TRIANGLE |
| 1F782 | ▶ | BLACK RIGHT-POINTING ISOSCELES RIGHT TRIANGLE |
| 1F783 | ▼ | BLACK DOWN-POINTING ISOSCELES RIGHT TRIANGLE |

Black circle

Constitute a set as follows: 22C5, 2219, 1F784, 2022, 2981, 26AB, and 25CF

| | | |
|-------|---|---|
| 1F784 | • | BLACK SLIGHTLY SMALL CIRCLE = black circle 3 |
|-------|---|---|

White circles

Adjective refers to the thickness of the ring.

Constitute a set as follows: 25CB, 2B58, 1F785..1F789.

| | | |
|-------|---|--|
| 1F785 | ○ | MEDIUM BOLD WHITE CIRCLE = ring 3 → 26AA ○ medium white circle |
| 1F786 | ⦿ | BOLD WHITE CIRCLE = ring 4 = very heavy circle |
| 1F787 | ⦿ | HEAVY WHITE CIRCLE = ring 5 |
| 1F788 | ⦿ | VERY HEAVY WHITE CIRCLE = ring 6 |
| 1F789 | ⦿ | EXTREMELY HEAVY WHITE CIRCLE = ring 7 |

White circle containing another black circle

Constitute a set as follows: 2299, 1F78A, and 29BF

| | | |
|-------|---|---|
| 1F78A | ⊙ | WHITE CIRCLE CONTAINING BLACK SMALL CIRCLE = ring button 2 |
|-------|---|---|

Target symbol

| | | |
|-------|---|--|
| 1F78B | ◎ | ROUND TARGET → 25CE ◎ bullseye → 29BE ◎ circled white bullet → 2B57 ◎ heavy circle with circle inside |
|-------|---|--|

Black squares

Constitute a set as follows: 1F78C, 2B1D, 1F78D, 25AA, 25FE, 25FC, and 2612

| | | |
|-------|---|---|
| 1F78C | • | BLACK TINY SQUARE = black square 1 |
| 1F78D | ▪ | BLACK SLIGHTLY SMALL SQUARE = black square 3 |

White squares

Constitute a set as follows: 25A1, 1F78D..1F792

| | | |
|-------|---|--|
| 1F78E | □ | LIGHT WHITE SQUARE = box 2 |
| 1F78F | □ | MEDIUM WHITE SQUARE = box 3 |
| 1F790 | ■ | BOLD WHITE SQUARE = box 4 = heavy white square |
| 1F791 | ■ | HEAVY WHITE SQUARE = box 5 |

| | | |
|-------|---|---|
| 1F792 | ■ | VERY HEAVY WHITE SQUARE = box 6 |
| 1F793 | ■ | EXTREMELY HEAVY WHITE SQUARE = box 7 |

White squares containing another black square

Constitute a set as follows: 1F794, 25A3, and 1F795

| | | |
|-------|---|---|
| 1F794 | ▣ | WHITE SQUARE CONTAINING BLACK VERY SMALL SQUARE = box button 1 |
| 1F795 | ▣ | WHITE SQUARE CONTAINING BLACK MEDIUM SQUARE = box button 3 |

Target symbol

| | | |
|-------|---|---------------|
| 1F796 | ▣ | SQUARE TARGET |
|-------|---|---------------|

Black diamonds

Constitute a set as follows: 1F797, 1F798, 2B29, 1F799, 2B25, and 25C6

| | | |
|-------|---|---|
| 1F797 | • | BLACK TINY DIAMOND = black diamond 1 |
| 1F798 | • | BLACK VERY SMALL DIAMOND = black diamond 2 |
| 1F799 | ◆ | BLACK MEDIUM SMALL DIAMOND = black diamond 4 |

White diamonds containing another black diamond

Constitute a set as follows: 1F798, 25C8, and 1F799

| | | |
|-------|---|---|
| 1F79A | ◊ | WHITE DIAMOND CONTAINING BLACK VERY SMALL DIAMOND = diamond button 1 |
| 1F79B | ◊ | WHITE DIAMOND CONTAINING BLACK MEDIUM DIAMOND = diamond button 3 |

Target symbol

| | | |
|-------|---|----------------|
| 1F79C | ◊ | DIAMOND TARGET |
|-------|---|----------------|

Lozenges

Constitute a set as follows: 1F79D, 1F79E, 2B2A, 1F79F, 2B27, 29EB, and 25CA

| | | |
|-------|---|---|
| 1F79D | • | BLACK TINY LOZENGE = black lozenge 1 |
| 1F79E | • | BLACK VERY SMALL LOZENGE = black lozenge 2 |
| 1F79F | ◆ | BLACK MEDIUM SMALL LOZENGE = black lozenge 4 |

White lozenge containing another black lozenge

| | | |
|-------|---|--|
| 1F7A0 | ◊ | WHITE LOZENGE CONTAINING BLACK SMALL LOZENGE = lozenge button |
|-------|---|--|

Greek crosses

| | | |
|-------|---|-------------------------------------|
| 1F7A1 | + | THIN GREEK CROSS = cross 1 |
| 1F7A2 | + | LIGHT GREEK CROSS = cross 2 |
| 1F7A3 | + | MEDIUM GREEK CROSS = cross 3 |
| 1F7A4 | + | BOLD GREEK CROSS = cross 4 |
| 1F7A5 | + | VERY BOLD GREEK CROSS = cross 5 |
| 1F7A6 | + | VERY HEAVY GREEK CROSS = cross 6 |

1F7A7 **+** EXTREMELY HEAVY GREEK CROSS
= cross 7

Saltires

1F7A8 **×** THIN SALTIRE
= x 1

1F7A9 **×** LIGHT SALTIRE
= x 2

1F7AA **×** MEDIUM SALTIRE
= x 3

1F7AB **×** BOLD SALTIRE
= x 4

1F7AC **×** HEAVY SALTIRE
= x 5

1F7AD **×** VERY HEAVY SALTIRE
= x 6

1F7AE **×** EXTREMELY HEAVY SALTIRE
= x 7

Five spoked asterisks

1F7AF **★** LIGHT FIVE SPOKED ASTERISK

1F7B0 **★** MEDIUM FIVE SPOKED ASTERISK

1F7B1 **★** BOLD FIVE SPOKED ASTERISK

1F7B2 **★** HEAVY FIVE SPOKED ASTERISK

1F7B3 **★** VERY HEAVY FIVE SPOKED ASTERISK

1F7B4 **★** EXTREMELY HEAVY FIVE SPOKED ASTERISK

Six spoked asterisks

1F7B5 **★** LIGHT SIX SPOKED ASTERISK

1F7B6 **★** MEDIUM SIX SPOKED ASTERISK

1F7B7 **★** BOLD SIX SPOKED ASTERISK

1F7B8 **★** HEAVY SIX SPOKED ASTERISK

1F7B9 **★** VERY HEAVY SIX SPOKED ASTERISK

1F7BA **★** EXTREMELY HEAVY SIX SPOKED ASTERISK

Eight spoked asterisks

1F7BB **★** LIGHT EIGHT SPOKED ASTERISK

1F7BC **★** MEDIUM EIGHT SPOKED ASTERISK

1F7BD **★** BOLD EIGHT SPOKED ASTERISK

1F7BE **★** HEAVY EIGHT SPOKED ASTERISK

1F7BF **★** VERY HEAVY EIGHT SPOKED ASTERISK

Three pointed stars

1F7C0 **▲** LIGHT THREE POINTED BLACK STAR

1F7C1 **▲** MEDIUM THREE POINTED BLACK STAR

1F7C2 **▲** THREE POINTED BLACK STAR

1F7C3 **▲** MEDIUM THREE POINTED PINWHEEL STAR

Four pointed stars

1F7C4 **+** LIGHT FOUR POINTED BLACK STAR

1F7C5 **+** MEDIUM FOUR POINTED BLACK STAR

1F7C6 **◆** FOUR POINTED BLACK STAR
• 2726 **◆** black four pointed star is a cusp
→ 2726 **◆** black four pointed star

1F7C7 **✦** MEDIUM FOUR POINTED PINWHEEL STAR

1F7C8 **✦** REVERSE LIGHT FOUR POINTED PINWHEEL STAR
= navigate

Five pointed stars

Constitute a set as follows: 1F7C6, 2605, 1F7C7, and 272F

1F7C9 **★** LIGHT FIVE POINTED BLACK STAR

1F7CA **★** HEAVY FIVE POINTED BLACK STAR

Six pointed stars

Constitute a set as follows: 2736, 1F7C8..1F7CA

1F7CB **★** MEDIUM SIX POINTED BLACK STAR

1F7CC **★** HEAVY SIX POINTED BLACK STAR

1F7CD **★** SIX POINTED PINWHEEL STAR

Eight pointed stars

Constitute a set with 2735, other two: 2737 and 2738 are oriented differently

1F7CE **★** MEDIUM EIGHT POINTED BLACK STAR
→ 2737 **★** eight pointed rectilinear black star

1F7CF **★** HEAVY EIGHT POINTED BLACK STAR
→ 2738 **★** heavy eight pointed rectilinear black star

1F7D0 **★** VERY HEAVY EIGHT POINTED BLACK STAR

1F7D1 **★** HEAVY EIGHT POINTED PINWHEEL STAR
→ 2735 **★** eight pointed pinwheel star



































































































Twelve pointed stars

Constitute a set as follows: 1F7CF, 2739, 1F7D0, and 1F7D1

1F7D2 **★** LIGHT TWELVE POINTED BLACK STAR

1F7D3 **★** HEAVY TWELVE POINTED BLACK STAR

1F7D4 **★** HEAVY TWELVE POINTED PINWHEEL STAR

| | 1F80 | 1F81 | 1F82 | 1F83 | 1F84 | 1F85 | 1F86 | 1F87 | 1F88 | 1F89 | 1F8A | 1F8B | 1F8C | 1F8D | 1F8E | 1F8F |
|---|---|---|---|---|---|---|---|---|---|---|--|------|------|------|------|------|
| 0 |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| 1 |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| 2 |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| 3 |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| 4 |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| 5 |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| 6 |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| 7 |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| 8 |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| 9 |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| A |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| B |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| C |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| D |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| E |  |  |  |  |  |  |  |  |  |  |  | | | | | |
| F |  |  |  |  |  |  |  |  |  |  |  | | | | | |

Arrows with small triangle arrowhead

| | | |
|-------|---|--|
| 1F800 | ← | LEFTWARDS ARROW WITH SMALL TRIANGLE ARROWHEAD |
| 1F801 | ↑ | UPWARDS ARROW WITH SMALL TRIANGLE ARROWHEAD |
| 1F802 | → | RIGHTWARDS ARROW WITH SMALL TRIANGLE ARROWHEAD |
| 1F803 | ↓ | DOWNWARDS ARROW WITH SMALL TRIANGLE ARROWHEAD |

Arrows with medium triangle arrowhead

| | | |
|-------|---|---|
| 1F804 | ← | LEFTWARDS ARROW WITH MEDIUM TRIANGLE ARROWHEAD |
| 1F805 | ↑ | UPWARDS ARROW WITH MEDIUM TRIANGLE ARROWHEAD |
| 1F806 | → | RIGHTWARDS ARROW WITH MEDIUM TRIANGLE ARROWHEAD |
| 1F807 | ↓ | DOWNWARDS ARROW WITH MEDIUM TRIANGLE ARROWHEAD |

Arrows with large triangle arrowhead

| | | |
|-------|---|--|
| 1F808 | ← | LEFTWARDS ARROW WITH LARGE TRIANGLE ARROWHEAD |
| 1F809 | ↑ | UPWARDS ARROW WITH LARGE TRIANGLE ARROWHEAD |
| 1F80A | → | RIGHTWARDS ARROW WITH LARGE TRIANGLE ARROWHEAD |
| 1F80B | ↓ | DOWNWARDS ARROW WITH LARGE TRIANGLE ARROWHEAD |

Arrows with small equilateral arrowhead

| | | |
|-------|---|---|
| 1F810 | ← | LEFTWARDS ARROW WITH SMALL EQUILATERAL ARROWHEAD |
| 1F811 | ↑ | UPWARDS ARROW WITH SMALL EQUILATERAL ARROWHEAD |
| 1F812 | → | RIGHTWARDS ARROW WITH SMALL EQUILATERAL ARROWHEAD |
| 1F813 | ↓ | DOWNWARDS ARROW WITH SMALL EQUILATERAL ARROWHEAD |

Arrows with equilateral arrowhead

| | | |
|-------|---|---|
| 1F814 | ← | LEFTWARDS ARROW WITH EQUILATERAL ARROWHEAD |
| 1F815 | ↑ | UPWARDS ARROW WITH EQUILATERAL ARROWHEAD |
| 1F816 | → | RIGHTWARDS ARROW WITH EQUILATERAL ARROWHEAD |
| 1F817 | ↓ | DOWNWARDS ARROW WITH EQUILATERAL ARROWHEAD |

Heavy arrows with equilateral arrowhead

| | | |
|-------|---|---|
| 1F818 | ← | HEAVY LEFTWARDS ARROW WITH EQUILATERAL ARROWHEAD |
| 1F819 | ↑ | HEAVY UPWARDS ARROW WITH EQUILATERAL ARROWHEAD |
| 1F81A | → | HEAVY RIGHTWARDS ARROW WITH EQUILATERAL ARROWHEAD |
| 1F81B | ↓ | HEAVY DOWNWARDS ARROW WITH EQUILATERAL ARROWHEAD |

Heavy arrows with large equilateral arrowhead

| | | |
|-------|---|---|
| 1F81C | ← | HEAVY LEFTWARDS ARROW WITH LARGE EQUILATERAL ARROWHEAD |
| 1F81D | ↑ | HEAVY UPWARDS ARROW WITH LARGE EQUILATERAL ARROWHEAD |
| 1F81E | → | HEAVY RIGHTWARDS ARROW WITH LARGE EQUILATERAL ARROWHEAD |

1F81F ↓ HEAVY DOWNWARDS ARROW WITH LARGE EQUILATERAL ARROWHEAD

Triangle headed arrows with narrow shaft

| | | |
|-------|---|--|
| 1F820 | ← | LEFTWARDS TRIANGLE-HEADED ARROW WITH NARROW SHAFT |
| 1F821 | ↑ | UPWARDS TRIANGLE-HEADED ARROW WITH NARROW SHAFT |
| 1F822 | → | RIGHTWARDS TRIANGLE-HEADED ARROW WITH NARROW SHAFT |
| 1F823 | ↓ | DOWNWARDS TRIANGLE-HEADED ARROW WITH NARROW SHAFT |

Triangle headed arrows with medium shaft

| | | |
|-------|---|--|
| 1F824 | ← | LEFTWARDS TRIANGLE-HEADED ARROW WITH MEDIUM SHAFT |
| 1F825 | ↑ | UPWARDS TRIANGLE-HEADED ARROW WITH MEDIUM SHAFT |
| 1F826 | → | RIGHTWARDS TRIANGLE-HEADED ARROW WITH MEDIUM SHAFT |
| 1F827 | ↓ | DOWNWARDS TRIANGLE-HEADED ARROW WITH MEDIUM SHAFT |

Triangle headed arrows with bold shaft

| | | |
|-------|---|--|
| 1F828 | ← | LEFTWARDS TRIANGLE-HEADED ARROW WITH BOLD SHAFT |
| 1F829 | ↑ | UPWARDS TRIANGLE-HEADED ARROW WITH BOLD SHAFT |
| 1F82A | → | RIGHTWARDS TRIANGLE-HEADED ARROW WITH BOLD SHAFT |
| 1F82B | ↓ | DOWNWARDS TRIANGLE-HEADED ARROW WITH BOLD SHAFT |

Triangle headed arrows with heavy shaft

| | | |
|-------|---|---|
| 1F82C | ← | LEFTWARDS TRIANGLE-HEADED ARROW WITH HEAVY SHAFT |
| 1F82D | ↑ | UPWARDS TRIANGLE-HEADED ARROW WITH HEAVY SHAFT |
| 1F82E | → | RIGHTWARDS TRIANGLE-HEADED ARROW WITH HEAVY SHAFT |
| 1F82F | ↓ | DOWNWARDS TRIANGLE-HEADED ARROW WITH HEAVY SHAFT |

Triangle headed arrows with very heavy shaft

| | | |
|-------|---|--|
| 1F830 | ← | LEFTWARDS TRIANGLE-HEADED ARROW WITH VERY HEAVY SHAFT |
| 1F831 | ↑ | UPWARDS TRIANGLE-HEADED ARROW WITH VERY HEAVY SHAFT |
| 1F832 | → | RIGHTWARDS TRIANGLE-HEADED ARROW WITH VERY HEAVY SHAFT |
| 1F833 | ↓ | DOWNWARDS TRIANGLE-HEADED ARROW WITH VERY HEAVY SHAFT |

Finger-post arrows

| | | |
|-------|---|------------------------------|
| 1F834 | ← | LEFTWARDS FINGER-POST ARROW |
| 1F835 | ↑ | UPWARDS FINGER-POST ARROW |
| 1F836 | → | RIGHTWARDS FINGER-POST ARROW |
| 1F837 | ↓ | DOWNWARDS FINGER-POST ARROW |

Squared arrows

| | | |
|-------|---|--------------------------|
| 1F838 | ← | LEFTWARDS SQUARED ARROW |
| 1F839 | ↑ | UPWARDS SQUARED ARROW |
| 1F83A | → | RIGHTWARDS SQUARED ARROW |
| 1F83B | ↓ | DOWNWARDS SQUARED ARROW |

Compressed arrows

| | | |
|-------|---|-----------------------------|
| 1F83C | ← | LEFTWARDS COMPRESSED ARROW |
| 1F83D | ↑ | UPWARDS COMPRESSED ARROW |
| 1F83E | → | RIGHTWARDS COMPRESSED ARROW |

1F83F ↘ DOWNWARDS COMPRESSED ARROW

Heavy compressed arrows

1F840 ⇐ LEFTWARDS HEAVY COMPRESSED ARROW

1F841 ⇑ UPWARDS HEAVY COMPRESSED ARROW

1F842 ⇨ RIGHTWARDS HEAVY COMPRESSED ARROW
→ 27A7 ⇨ squat black rightwards arrow

1F843 ⇩ DOWNWARDS HEAVY COMPRESSED ARROW

Heavy arrows

1F844 ⇐ LEFTWARDS HEAVY ARROW

1F845 ⇑ UPWARDS HEAVY ARROW

1F846 ⇨ RIGHTWARDS HEAVY ARROW

1F847 ⇩ DOWNWARDS HEAVY ARROW

Sans-serif arrows1F850 ← LEFTWARDS SANS-SERIF ARROW
→ 2190 ← leftwards arrow1F851 ↑ UPWARDS SANS-SERIF ARROW
→ 2191 ↑ upwards arrow1F852 → RIGHTWARDS SANS-SERIF ARROW
→ 2192 → rightwards arrow1F853 ↓ DOWNWARDS SANS-SERIF ARROW
→ 2193 ↓ downwards arrow1F854 ↖ NORTH WEST SANS-SERIF ARROW
→ 2196 ↖ north west arrow1F855 ↗ NORTH EAST SANS-SERIF ARROW
→ 2197 ↗ north east arrow1F856 ↘ SOUTH EAST SANS-SERIF ARROW
→ 2198 ↘ south east arrow1F857 ↙ SOUTH WEST SANS-SERIF ARROW
→ 2199 ↙ south west arrow1F858 ⇄ LEFT RIGHT SANS-SERIF ARROW
→ 2194 ⇄ left right arrow1F859 ⇕ UP DOWN SANS-SERIF ARROW
→ 2195 ⇕ up down arrow**Wide-headed light barb arrows**

1F860 ← WIDE-HEADED LEFTWARDS LIGHT BARB ARROW

1F861 ↑ WIDE-HEADED UPWARDS LIGHT BARB ARROW

1F862 → WIDE-HEADED RIGHTWARDS LIGHT BARB ARROW

1F863 ↓ WIDE-HEADED DOWNWARDS LIGHT BARB ARROW

1F864 ↖ WIDE-HEADED NORTH WEST LIGHT BARB ARROW

1F865 ↗ WIDE-HEADED NORTH EAST LIGHT BARB ARROW

1F866 ↘ WIDE-HEADED SOUTH EAST LIGHT BARB ARROW

1F867 ↙ WIDE-HEADED SOUTH WEST LIGHT BARB ARROW

Wide-headed barb arrows

1F868 ← WIDE-HEADED LEFTWARDS BARB ARROW

1F869 ↑ WIDE-HEADED UPWARDS BARB ARROW

1F86A → WIDE-HEADED RIGHTWARDS BARB ARROW

1F86B ↓ WIDE-HEADED DOWNWARDS BARB ARROW

1F86C ↖ WIDE-HEADED NORTH WEST BARB ARROW

1F86D ↗ WIDE-HEADED NORTH EAST BARB ARROW

1F86E ↘ WIDE-HEADED SOUTH EAST BARB ARROW

1F86F ↙ WIDE-HEADED SOUTH WEST BARB ARROW

Wide-headed medium barb arrows

1F870 ← WIDE-HEADED LEFTWARDS MEDIUM BARB ARROW

1F871 ↑ WIDE-HEADED UPWARDS MEDIUM BARB ARROW

1F872 → WIDE-HEADED RIGHTWARDS MEDIUM BARB ARROW

→ 2794 → heavy wide-headed rightwards arrow

1F873 ↓ WIDE-HEADED DOWNWARDS MEDIUM BARB ARROW

1F874 ↖ WIDE-HEADED NORTH WEST MEDIUM BARB ARROW

1F875 ↗ WIDE-HEADED NORTH EAST MEDIUM BARB ARROW

1F876 ↘ WIDE-HEADED SOUTH EAST MEDIUM BARB ARROW

1F877 ↙ WIDE-HEADED SOUTH WEST MEDIUM BARB ARROW

Wide-headed heavy barb arrows

1F878 ← WIDE-HEADED LEFTWARDS HEAVY BARB ARROW

1F879 ↑ WIDE-HEADED UPWARDS HEAVY BARB ARROW

1F87A → WIDE-HEADED RIGHTWARDS HEAVY BARB ARROW

1F87B ↓ WIDE-HEADED DOWNWARDS HEAVY BARB ARROW

1F87C ↖ WIDE-HEADED NORTH WEST HEAVY BARB ARROW

1F87D ↗ WIDE-HEADED NORTH EAST HEAVY BARB ARROW

1F87E ↘ WIDE-HEADED SOUTH EAST HEAVY BARB ARROW

1F87F ↙ WIDE-HEADED SOUTH WEST HEAVY BARB ARROW

Wide-headed very heavy barb arrows

1F880 ← WIDE-HEADED LEFTWARDS VERY HEAVY BARB ARROW

1F881 ↑ WIDE-HEADED UPWARDS VERY HEAVY BARB ARROW

1F882 → WIDE-HEADED RIGHTWARDS VERY HEAVY BARB ARROW

1F883 ↓ WIDE-HEADED DOWNWARDS VERY HEAVY BARB ARROW

1F884 ↖ WIDE-HEADED NORTH WEST VERY HEAVY BARB ARROW

1F885 ↗ WIDE-HEADED NORTH EAST VERY HEAVY BARB ARROW

1F886 ↘ WIDE-HEADED SOUTH EAST VERY HEAVY BARB ARROW

1F887 ↙ WIDE-HEADED SOUTH WEST VERY HEAVY BARB ARROW

Arrowheads1F890 ◀ LEFTWARDS TRIANGLE ARROWHEAD
= draw left1F891 ▲ UPWARDS TRIANGLE ARROWHEAD
= draw up1F892 ▶ RIGHTWARDS TRIANGLE ARROWHEAD
= draw right1F893 ▼ DOWNWARDS TRIANGLE ARROWHEAD
= draw down1F894 ◄ LEFTWARDS WHITE ARROW WITHIN TRIANGLE ARROWHEAD
= draw double left

| | | |
|-------|---|---|
| 1F895 | ▲ | UPWARDS WHITE ARROW WITHIN TRIANGLE ARROWHEAD = draw double up |
| 1F896 | ▶ | RIGHTWARDS WHITE ARROW WITHIN TRIANGLE ARROWHEAD = draw double right |
| 1F897 | ▼ | DOWNWARDS WHITE ARROW WITHIN TRIANGLE ARROWHEAD = draw double down |

Notched arrows

| | | |
|-------|---|--|
| 1F898 | ◄ | LEFTWARDS ARROW WITH NOTCHED TAIL |
| 1F899 | ↑ | UPWARDS ARROW WITH NOTCHED TAIL |
| 1F89A | ➤ | RIGHTWARDS ARROW WITH NOTCHED TAIL → 27AF ⇔ notched lower right-shadowed white rightwards arrow |
| 1F89B | ↓ | DOWNWARDS ARROW WITH NOTCHED TAIL |

Heavy arrow shaft

Vertical alignment and thickness compatible with heavy shaft arrows

| | | |
|-------|---|------------------------------------|
| 1F89C | ▬ | HEAVY ARROW SHAFT WIDTH ONE |
| 1F89D | ▬ | HEAVY ARROW SHAFT WIDTH TWO THIRDS |
| 1F89E | ▬ | HEAVY ARROW SHAFT WIDTH ONE HALF |
| 1F89F | ▬ | HEAVY ARROW SHAFT WIDTH ONE THIRD |

Shaded white arrows

| | | |
|-------|---|---|
| 1F8A0 | ⇐ | LEFTWARDS BOTTOM-SHADED WHITE ARROW |
| 1F8A1 | ⇒ | RIGHTWARDS BOTTOM SHADED WHITE ARROW |
| 1F8A2 | ⇐ | LEFTWARDS TOP SHADED WHITE ARROW |
| 1F8A3 | ⇒ | RIGHTWARDS TOP SHADED WHITE ARROW |
| 1F8A4 | ⇐ | LEFTWARDS LEFT-SHADED WHITE ARROW |
| 1F8A5 | ⇒ | RIGHTWARDS RIGHT-SHADED WHITE ARROW → 27A9 ⇔ right-shaded white rightwards arrow |
| 1F8A6 | ⇐ | LEFTWARDS RIGHT-SHADED WHITE ARROW |
| 1F8A7 | ⇒ | RIGHTWARDS LEFT-SHADED WHITE ARROW → 27AA ⇔ left-shaded white rightwards arrow |
| 1F8A8 | ⇐ | LEFTWARDS BACK-TILTED SHADOWED WHITE ARROW |
| 1F8A9 | ⇒ | RIGHTWARDS BACK-TILTED SHADOWED WHITE ARROW → 27AB ⇔ back-tilted shadowed white rightwards arrow |
| 1F8AA | ⇐ | LEFTWARDS FRONT-TILTED SHADOWED WHITE ARROW |
| 1F8AB | ⇒ | RIGHTWARDS FRONT-TILTED SHADOWED WHITE ARROW → 27AC ⇔ front-tilted shadowed white rightwards arrow |

White arrow shaft

Vertical alignment and thickness compatible with white arrows

| | | |
|-------|---|------------------------------------|
| 1F8AC | ▬ | WHITE ARROW SHAFT WIDTH ONE |
| 1F8AD | ▬ | WHITE ARROW SHAFT WIDTH TWO THIRDS |